

561

Index

Township 4 North Range 37 East Will, Mer.

	14		
18	13	17	
	13		
19	12	20	
	11	10	
30	10	29	7
9		8	
31	7	32	6
3		4	

I Charles Sanders do solemnly swear that I will faithfully perform the duties of chainman that I will level the chain over uneven ground and plumb the tally pins whether sticking or dropping the same, and that I will report the true distance to all notable objects and the true length of all lines that I assist in measuring according to the best of my skill and ability

Charles Sanders

Territory of Washington }
 County of Walla Walla } ss. Subscribed
 and sworn to before me
 this 3rd day of October 1866

B. A. Seaton

Clerk of the U. S. District
 Court - 1st Judicial District
 Washington Territory

I C. A. Neal do solemnly
 swear that I will well and
 faithfully perform the duties of
 Assessor in conformity to the
 instructions furnished me
 according to the best of my
 skill and ability.

C. A. Neal

Washington Territory }
 County of Walla Walla } ss

Subscribed and sworn

to before me this 9th day
 of October 1866,

B. A. Seflon,
 Clerk of the U. S. District
 Court, First Judicial District
 Washington Territory

Field Notes of Part
 of the Exterior lines of
 Township No 4 North of Range
 37 East of Willamette Meridian,
 Commencing at the South
 East Corner of Township No 4 North
 of Range 36 East of Willamette Meridian
 Thence

East on South boundary of section 31

40.00
 4000

Set post corner for $\frac{1}{4}$ section, from which
 A Larch 12 in-dia-bears N 33° E, 12 links

80.00
 8000

do- do- 8 do- do- do- S 5° W, 32 do-

Set post corner sections 31, 32, 5 & 6,
 from which

A Fir 8 in-dia-bears S 6° E 18 links

do, do, 6 do, do, do, N 45° E, 11 do-

do- do- 20 do, do- do- S 40° W 40 do-

do- do- 7 do- do- do- N 54° W 32 do-

This line passes through
 thick timber Fir Larch & Pine
 Undergrowth the same

4

2564

Township 8 North Range 37 East Will Mex

East between sections 32 & 5,

Bar 21° East,

40.00 Set post corner for 4 section from which

A Pine 8 in-dia. bears N. 12° W, 22 links

do Fir 6 do- do- do S, 15° W, 27 do

80.00 Set post corner for sections 4, 5, 32 & 33

from which

A Fir 20 in-dia. bears S. 55° W, 19 links

do- do- 15 do- do- do- S, 40° E, 59 do

do- do- 20 do- do- do- N, 60° E, 40 do

do- do- 18 do- do- do- N, 3° W, 9 do

Land gently rolling covered
with thick timber generally of small
growth, Fir Spruce and Pine
undergrowth the same,

The southern boundary of
this Township should be surveyed
and the south west half of the
Township should be subdivided
because of the valuable timber
The North east half is cut up by

a deep canyon very steep and difficult
to cross.

The lateness of the season prevented
my further prosecuting the journey
October 11th 1866.

X



We hereby certify that we assisted William
 H. Odell, deputy surveyor in surveying
 two miles of the exterior boundaries and
 subdividing to the extent set forth in
 the foregoing field notes; Township
 number four North of the Base Line
 of Range thirty seven East of
 Willamette Meridian, and that
 said Township has been in all respects
 to the best of our knowledge and
 belief, well and faithfully surveyed
 and the boundary monuments
 planted according to the instructions
 furnished by the Surveyor General,
 J. A. Pigg Chairman
 Charles Sanders Chairman

La Vil Heron
 Territory of Washington }
 County of Walla Walla } 88 Subscribed
 and sworn to before me this
 24th day of October 1866.

W. Parker
 Notary Public




X

578

I William H. Odell, Deputy
 Surveyor, do solemnly swear that
 in pursuance of a contract with
 O. L. Applegate, surveyor of the public
 of the United States in the State
 of Oregon, bearing date July 2nd day
 1866. and in strict conformity to
 to the laws of the United States and
 the instructions furnished by said
 Surveyor General I have faithfully
 surveyed the exterior boundary
 and subdivisions of Township No.
 4 North of the Base line of Range 37 East of
 Willamette Meridian in the State of
 Oregon aforesaid, and do further
 solemnly swear that the foregoing are
 are the true and original field notes
 of such survey. William H. Odell

State of Oregon }
 County of Lane 1867. Subscribed and
 Sworn to before me this
 5th day of January 1867.
 Joel Han
 Notary Public

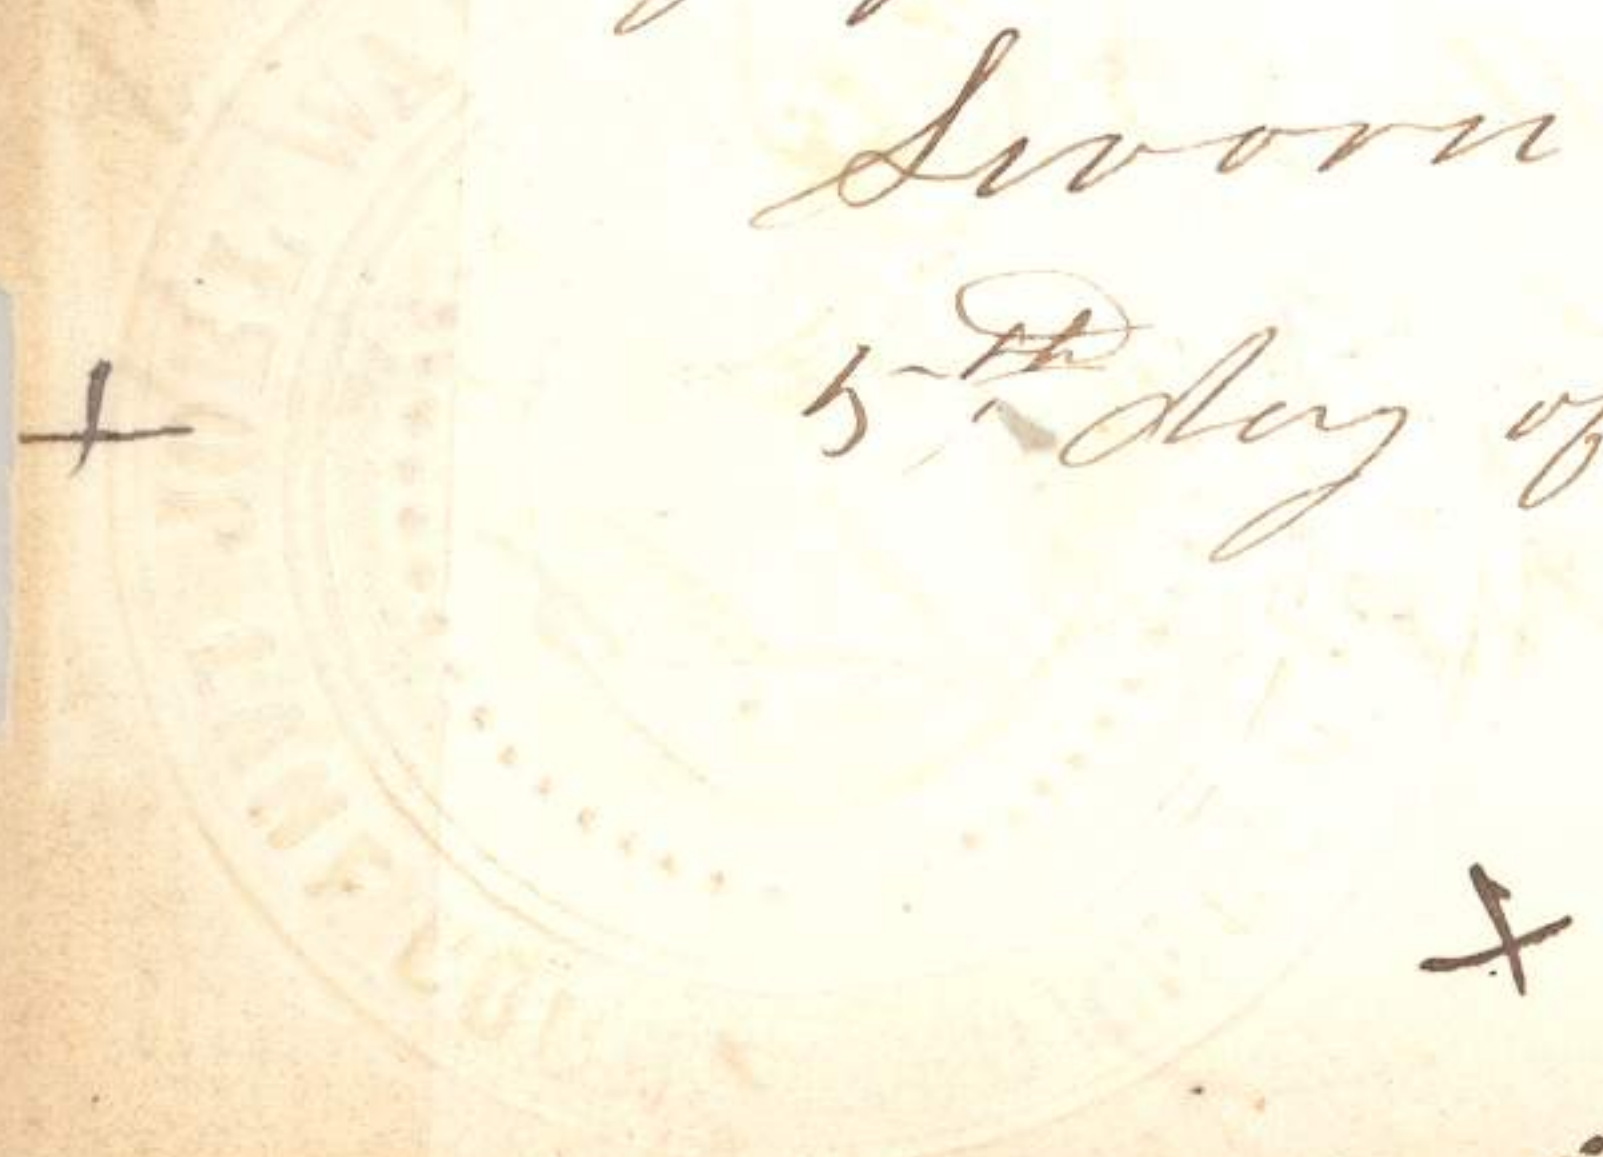

Surveyor General's Office
Denver City, January 11th 1867

The foregoing field notes
of the survey of the Eastern
Boundary and Subdivisions
of Township 604 N Range
37 East 11d mer or W executed
by Mr A Odell deputy sur
veyor under contract No 114 dated
July 2nd, 1866 having
been critically examined
the necessary explanations
and corrections made
the said field notes and
the survey they describe
are hereby approved

E. L. Applegate
Sur Genl of W

+