

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

ORIGINAL

R621

140


FIELD NOTES

OF THE

REMONUMENTATION OF CERTAIN ORIGINAL CORNER POINTS,

TOWNSHIP 3 NORTH, RANGE 37 EAST,

INDEX DIAGRAM

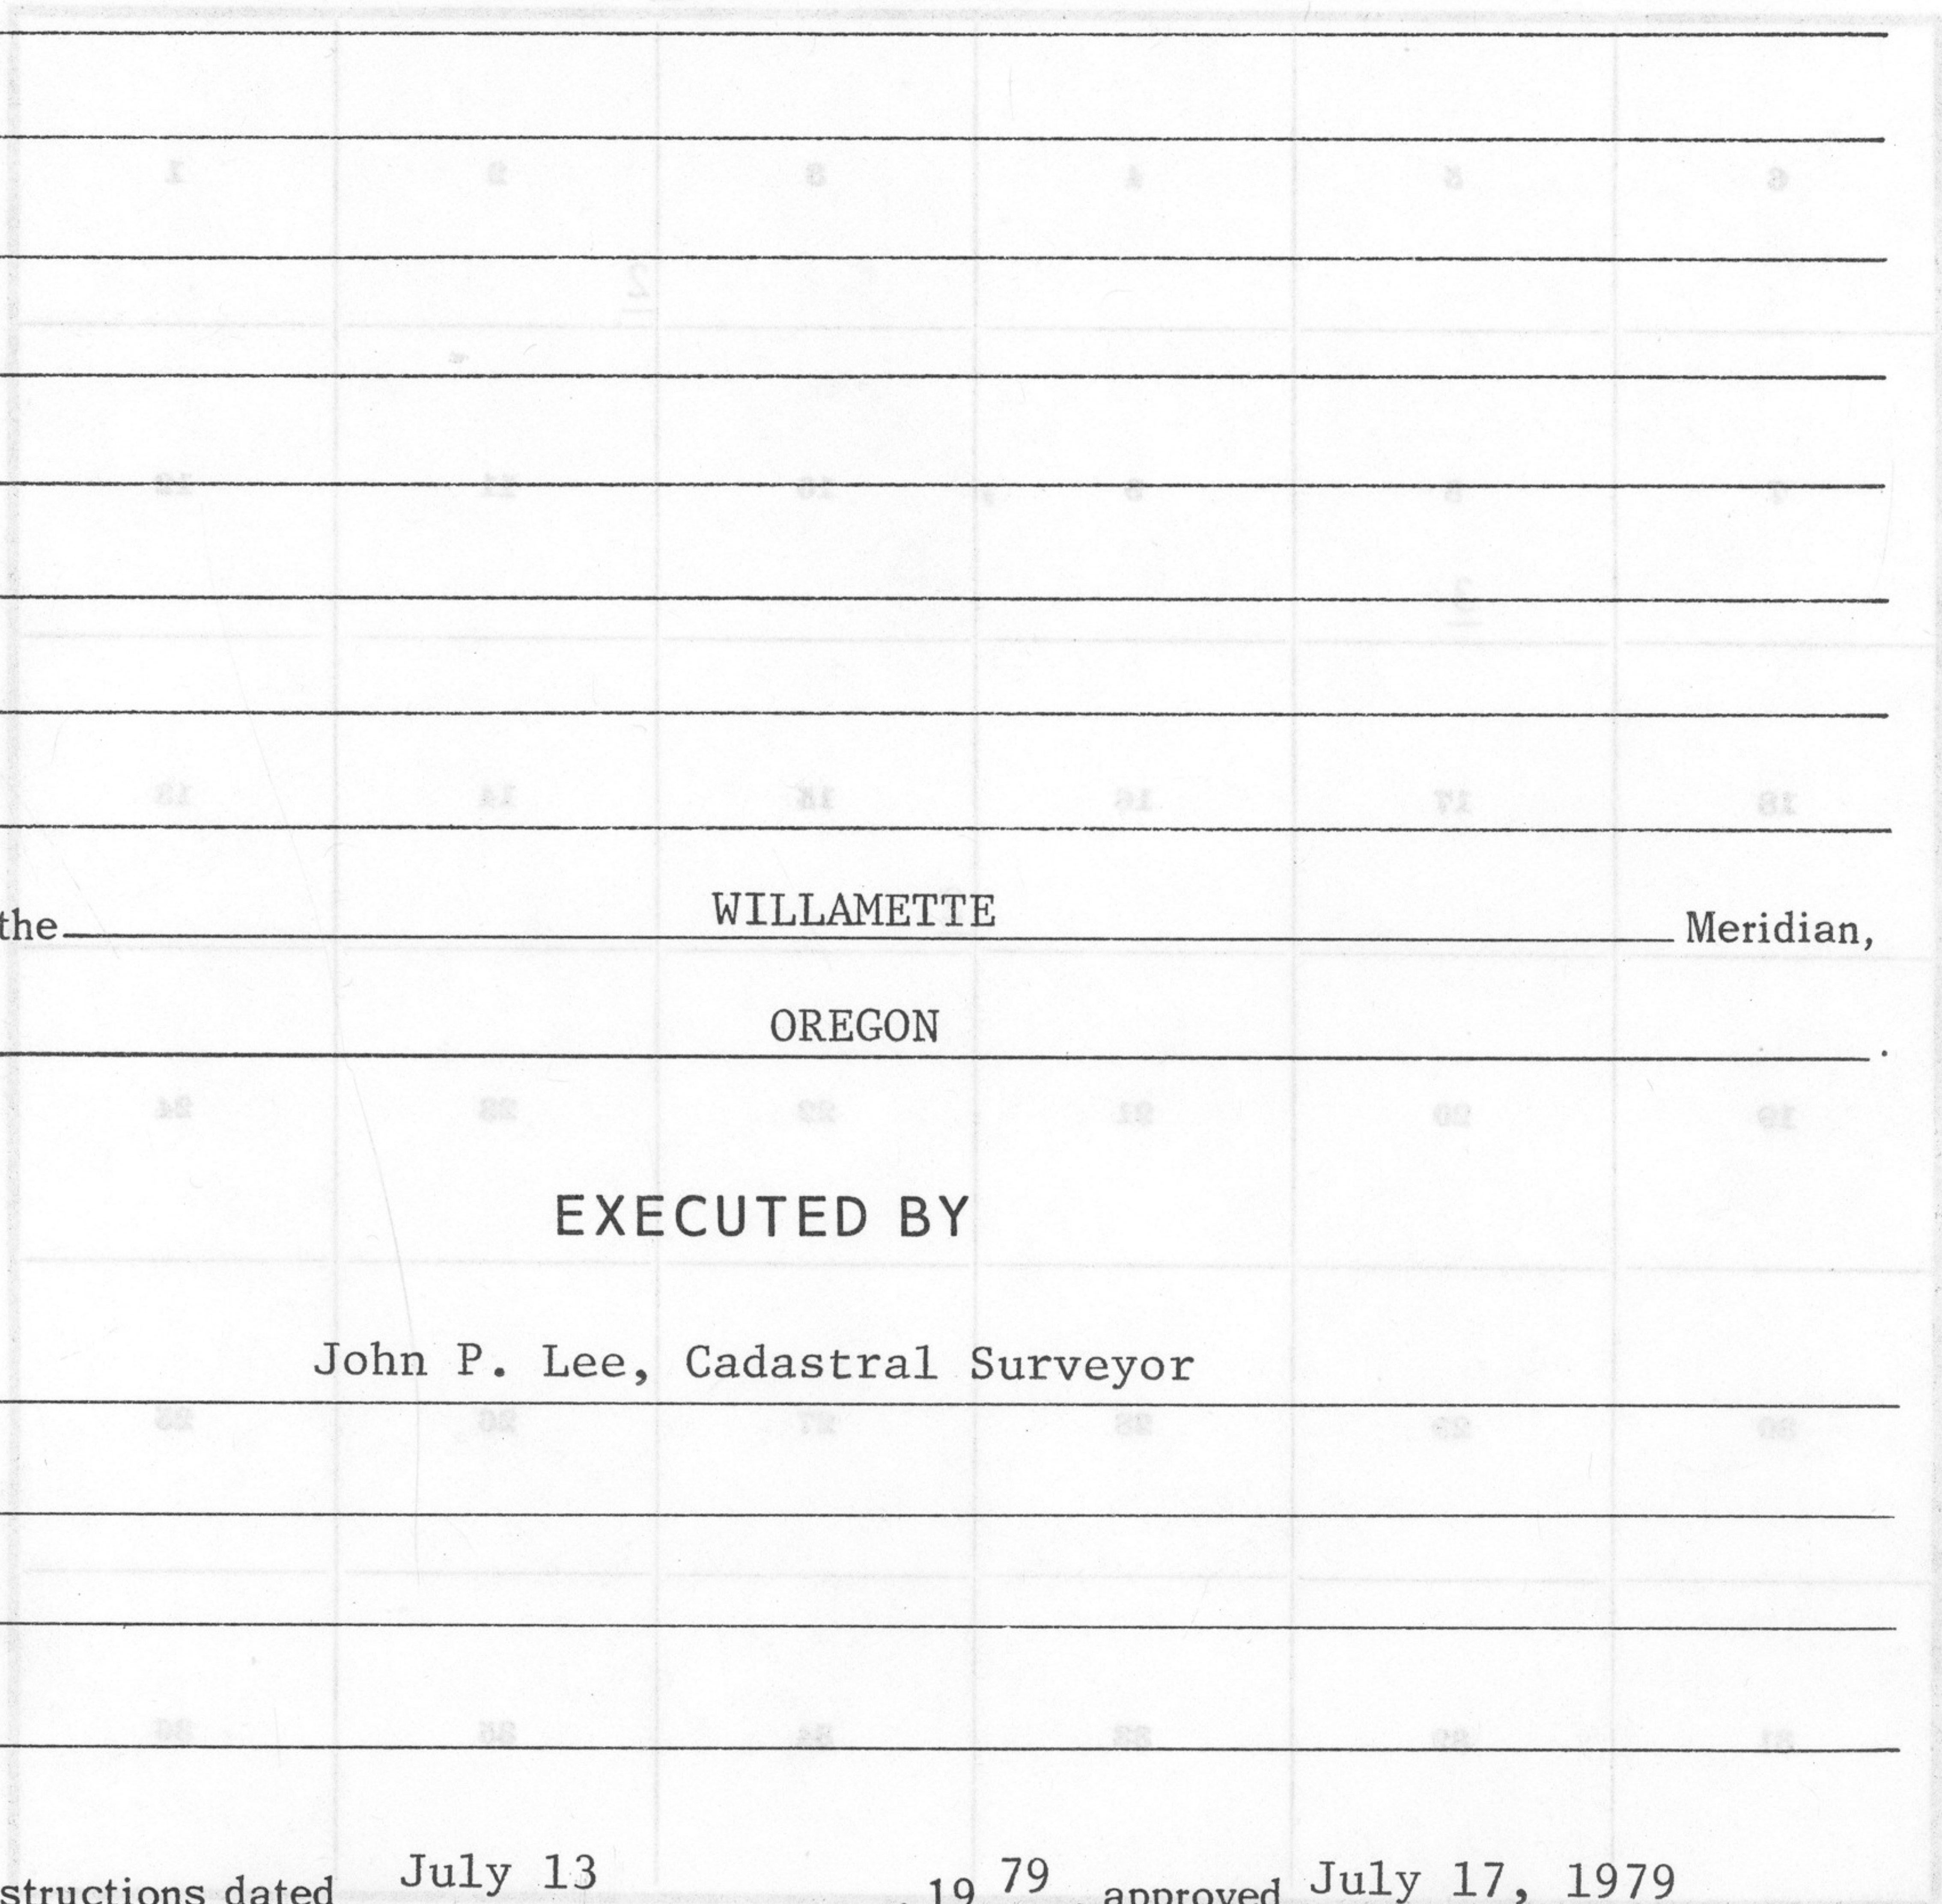

Of the WILLAMETTE Meridian,

In the State of OREGON

EXECUTED BY

John P. Lee, Cadastral Surveyor

Under special instructions dated July 13, 19 79, approved July 17, 1979

_____, which provided for the surveys included under U.S. Survey/Group
Number 1000, and assignment instructions dated March 25, 1980.

Survey commenced May 19, 1980

Survey completed May 21, 1980

ORIGINAL

R221

140

FIELD NOTES

OF THE

141

RENUMERATION OF CERTAIN ORIGINAL CORNER POINTS

TOWNSHIP 3 NORTH, RANGE 37 EAST,

INDEX DIAGRAM

Township 3 North, Range 37 East,
1

6	5	4	3	2	1
				<u>2</u>	
7	8	9	10	11	12
	<u>3</u>				
18	17	16	15	14	13
			<u>2</u>		
19	20	21	22	23	24
30	29	28	27	26	25
31	32	33	34	35	36

Number 1000 and assignment instructions dated March 25, 1980, which provided for the surveys included under U.S. Survey Group

Survey commenced May 19, 1980
Survey completed May 21, 1980

T. 3 N., R. 37 E., Willamette Meridian, Oregon

CHAINS

The following field notes describe the remonumentation of certain original corner points, township 3 north, range 37 east, Willamette Meridian, Oregon, as provided for in the Special Instructions, Group Number 1000, dated July 13, 1979, "Investigation of Physical Evidence of Corner Positions and Accessories, Followed by Remonumentation of Corner Points, with New Accessories when Needed."

The remonumentation of original corner points was made at the request of the United States Forest Service, in conjunction with their Land Line Location Program.

The mean magnetic declination is $20^{\circ} 30' E.$

North Boundary, T. 3 N., R. 37 E.,
Willamette Meridian, Oregon

(Remonumenting a corner established by George S. Pershin,
U. S. Deputy Surveyor, in 1879)

The cor. of secs. 2, 3, 34, and 35, on the N. bdy. of the Tp., determined at record bearing and distance from the remains of the original bearing trees:

A fir, 30 ins. diam., bears S. $40^{\circ} W.$, 30 lks. dist., with no marks visible on opened blaze.

A root hole, bears N. $40^{\circ} W.$, 53 lks. dist., with a down fir alongside, 27 ins. diam., with scribe mark 5 visible on partially healed blaze.

At the corner point

Set an iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 23 ins. in the ground, with brass cap mkd.

T 4 N R 37 E	
S 34	S 35
S 3	S 2
T 3 N	
1980	

from which new bearing trees

A spruce, 14 ins. diam., bears N. $17\frac{3}{4}^{\circ} E.$, $52\frac{1}{2}$ lks. dist., mkd. T4N R37E S35 BT.

A spruce, 14 ins. diam., bears S. $33\frac{3}{4}^{\circ} E.$, $28\frac{1}{2}$ lks. dist., mkd. T3N R37E S2 BT.

A spruce, 18 ins. diam., bears S. $51\frac{1}{2}^{\circ} W.$, $19\frac{1}{2}$ lks. dist., mkd. T3N R37E S3 BT.

A spruce, 8 ins. diam., bears N. $18\frac{1}{2}^{\circ} W.$, $64\frac{1}{2}$ lks. dist., mkd. T4N R37E S34 BT.

Corner is located in a draw, drains SW.

Subdivisions, T. 3 N., R. 37 E.,
Willamette Meridian, Oregon

Form 9600-11
(August 1979)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

CERTIFY upon honor that, in pursuance of the hearing date of the 13th day

NAMES CAPACITY

William R. Moore Engineering Technician (USFS)

April 7, 1981

July 12, 1983

146

6
CERTIFICATE OF SURVEY

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Form 950-11
(August 1979)

(I) ~~XXX~~, John P. Lee, Cadastral Surveyor, HEREBY

CERTIFY upon honor that, in pursuance of special instructions bearing date of the 13th day of July, 1979, (I) ~~XXX~~ have remonumented certain original corner points, township 3 north, range 37 east,

of the Willamette Meridian, in the State of Oregon, which are represented in the foregoing field notes as having been executed by (me), ~~(XX)~~ and under (my) ~~(XXX)~~ direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

April 7, 1981

(Date)

John P. Lee

(Cadastral Surveyor)

(Date)

(Cadastral Surveyor)

CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT

Portland, Oregon

The foregoing field notes of the remonumentation of certain original corner points, township 3 north, range 37 east, Willamette Meridian, Oregon,

executed by John P. Lee, Cadastral Surveyor,

having been critically examined and found correct, are hereby approved.

July 15, 1983

(Date)

William W. Glenn

Chief Cadastral Surveyor of Oregon)

CERTIFICATE OF TRANSCRIPT

I CERTIFY That the foregoing transcript of the field notes of the above-described surveys in _____, is a true copy of the original field notes.

(Date)

(Chief, Cadastral Survey Examination and Approval Staff)