

FIELD NOTES.

On the survey of the Subdivisional

Lines of T. 4 N. R. 39 E.

Willamette Meridian,

Oregon, as surveyed by Frank W. Campbell

U. S. Deputy Surveyor, under his Contract No. 498

dated March 10<sup>th</sup> 1884

Survey commenced April 23<sup>d</sup> 1884

Survey completed May 8<sup>th</sup> 1884

NAMES AND DUTIES OF ASSISTANTS.

....., Compassman.

Frank C. Baird, Chainman.

William J. Welch, Chainman.


....., Chainman.

....., Chainman.

Thomas J. McArthur, Axeman.

....., Axeman.

....., Flagman.

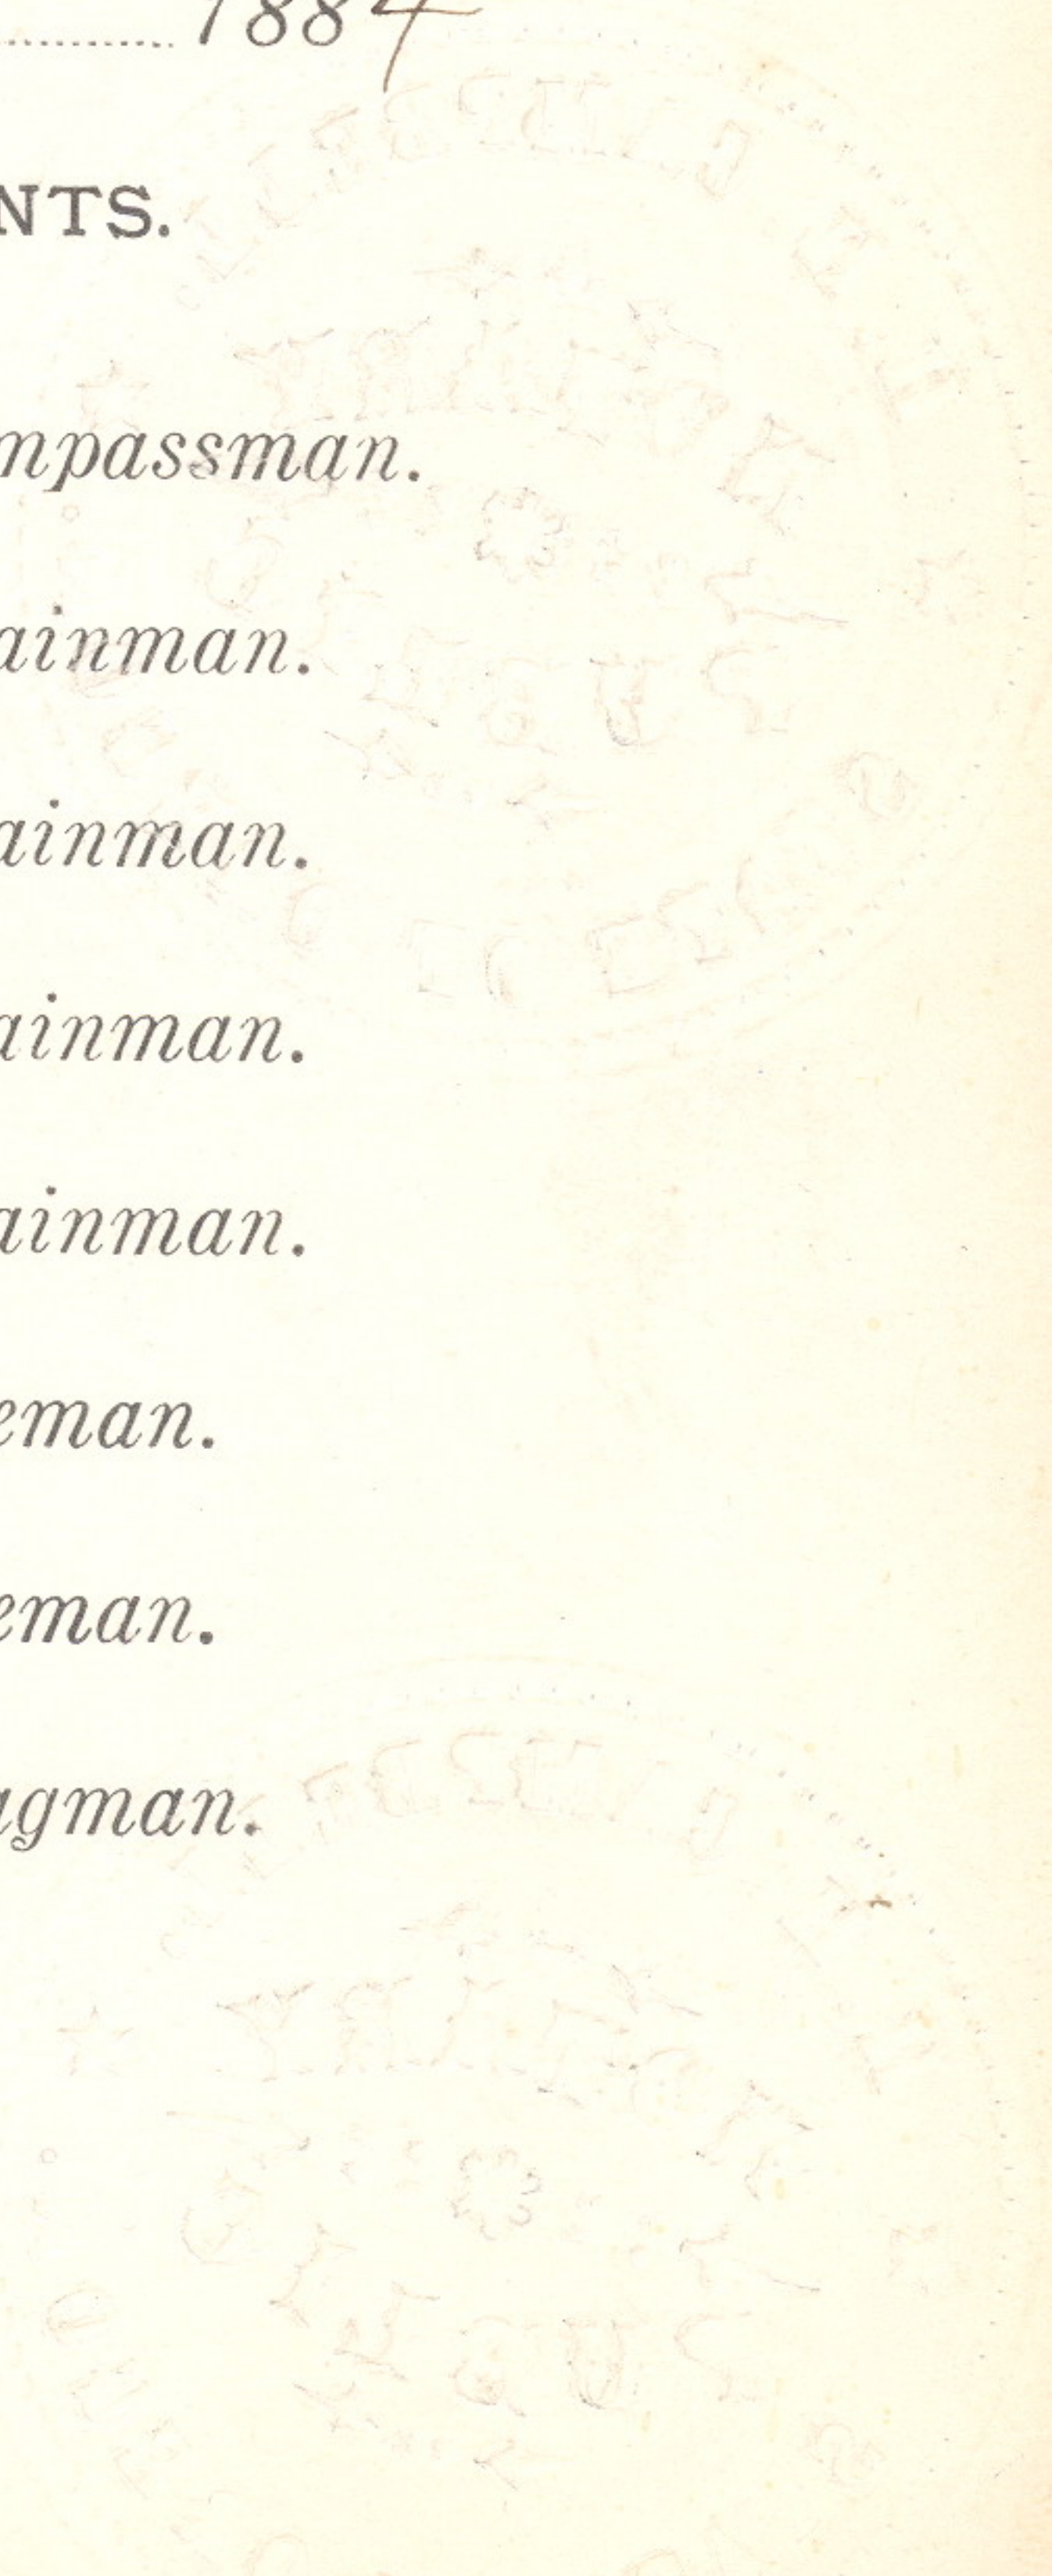

776

PRELIMINARY OATHS OF ASSISTANTS.

We, Frank C Baird &  
William J. Welch

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Subdivisional

lines of T. 4 N.

R. 39 E. Willamette Meridian, Oregon.

Frank C. Baird., Chainman.

William J. Welch, Chainman.

\_\_\_\_\_, Chainman.

\_\_\_\_\_, Chainman.

Subscribed and sworn to before me, this 21st

day of April 1884

[SEAL.] H. H. Campbell

Notary Public

We, Thomas J. McArthur and

\_\_\_\_\_, do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability

in the survey of the Subdivisional lines of

T. 4 N. R. 39 E. Willamette Meridian, Oregon.

Thomas J. McArthur, Axeman.

\_\_\_\_\_, Axeman.

Subscribed and sworn to before me, this 21st

day of April 1884

[SEAL.] H. H. Campbell

Notary Public  
for Oregon

# INDEX.

Referring the Lines to the Pages of the Field Notes.

T. 4 A R. 39 E Will. Mer.

6	117	5	85	4	65	3	45	2	24	1
114		113		84		63		43		22
7	111	8	82	9	61	10	41	11	20	12
108		107		80		60		40		17
18	105	17	78	16	58	15	38	14	15	13
103		101		77		56		36		13
19	99	20	75	21	54	22	34	23	11	24
97		96		73		53		33		9
30	94	29	71	28	51	27	31	26	7	25
92		90		70		49		29		4
31	88	32	67	33	47	34	27	35	2	36

Meanders of ..... Page ..... to .....

Meanders of ..... Page ..... to .....

Subdivisions T. 4 N. R. 39 E  
Willamette Meridian, Oregon.

pine, fir, tamarack &  
spruce 80. chs.  
Thick undergrowth of yew,  
alder, showmake & spruce 80 chs.

North bet. secs. 1 & 2

Var. 20° E

Descending over rolling  
ground facing N. W.

30.00 Creek 8 lks. wide runs N. - 150 ft.

40.00 Set a tamarack post + 100 "

3 ft. long 3 ins. sq. 24 ins. in  
ground for 1/4 sec. cor. marked  
1/4 S. on N. face

from which

Aspruce 10 ins. dia. br. N. 60° E. 22 lks.  
dist. marked 1/4 S. B. T.

Aspruce 13 ins. dia. br. West 34 lks.  
dist. marked 1/4 S. B. T.

Thence ascending gently

Subdivision of T. 4 N. R. 39 E.

Willamette Meridian, Oregon.

81.65 Intersect the first standard parallel North at a point 21.89 chs. E. of the cor. to secs. 35 & 36 - T. 5 N. R. 39 E. - at which point I set a tamarack post 4 ft. long 4 ins. sq. 24 ins. in ground for closing cor. to secs. 1 & 2 marked l. l. T. 4 N. R. 39 E. on S.

S. 1 " E. 8

S. 2 " W. faces,

with 1 notch on E. & 5 notches on W. faces; from which

A tamarack 18 ins. dia. br. N. 27 W. 30 lbs. disk. marked T. 5 N. R. 39 E. S. 36 B. T.

A tamarack 20 ins. dia. br. S. 60 W. 23 lbs. disk. marked T. 4 N. R. 39 E. S. 2 B. T.

Aspruce 10 ins. dia. br. S. 40 E. 44 lbs. disk. marked T. 4 N. R. 39 E. S. 1 B. T.

Land rolling.

Soil 2<sup>d</sup> rate.

Subdivisions of T. 4 N. R. 39 E.  
Willamette Meridian, Oregon.

North bet. secs. 2 and 3  
Var. 21° E.

Ascend gently over rolling ground  
through dense forest & thick brush.

12.00 Descent course N. N. & S. E.

40.00 Aspruce tree 18 ins. diam. - 250 ft.  
which I marked 1/4 S. on N. face,  
for 1/4 sec. cor.; from which

Aspruce 20 ins. dia. brs. N. 78° E. 79 lks.  
dist. marked 1/4 S. B. T.

Aspruce 20 ins. dia. brs. S. 55° N. 55 lks.  
dist. marked 1/4 S. B. T.

gently descending to

61.00 Branch 8 lks. wide runs S. E. &  
ascend

81.49 Intersect the 1<sup>st</sup> Standard + 150 ft.  
Parallel North at a point  
22.48 chs. E. of the cor. to secs.  
34 & 35 - T 5 N. R. 39 E. - at which  
point I set a spruce post  
4 ft. long, 4 ins. sq. 24 ins

826  
Subdivision of T. 4 N. R. 39 E.

Willamette Meridian, Oregon.

in ground for closing cor.  
to secs. 2 & 3 marked  
C.C.T. 4 N. R. 39 E. on S.

S. 2 " E. 8  
S. 3 " N. faces,

with 2 notches on E. & 4  
notches on N. edges;  
from which

A pine 28 ins. dia. brs. N. 40° W. 48 lbs.  
dist. marked T. 5 N. R. 39 E. S. 35 B. T.

A fir 16 ins. dia. brs. S. 71° W. 44 lbs.  
dist. marked T. 4 N. R. 39 E. S. 3 B. T.

A fir 6 ins. dia. brs. S. 28° E. 20 lbs.  
dist. marked T. 4 N. R. 39 E. S. 2 B. T.

Land rolling.  
Soil 2<sup>d</sup> rate.

Densely covered with forests  
of pine fir spruce and  
tamarack 81.49 chs.

Thick undergrowth of alder, spruce  
& shoemaker. April 29, 1884

Subdivisions of T. 4 N. R. 39 E. 845  
Willamette Meridian, Oregon.

North bet. secs. 3 & 4

Var. 21° E.

Ascending gently over rolling ground facing S.E.

40.00 Aspruce tree 8 ins. diam. + 150 ft.

which I marked 1/4 S on N. face for 1/4 sec. cor.

from which

Aspruce 20 ins. dia. brs. Ct. 68° E. 26 lbs. dist. marked 1/4 S. B. T.

Aspruce 20 ins. dia. brs. S. 50° W. 65 lbs. dist. marked 1/4 S. B. T.

81.24 Intersect the 1<sup>st</sup> Standard

Parallel Ct. at a point 23.40 chs.

E. of the cor. to secs. 33 & 34 - T. 5 N.

R. 39 E. - at which point I set

a spruce post 4 ft. long 4 ins + 200 ft.

sq. 24 ins. in ground for

Closing cor. to secs. 3 & 4 marked

C. C. T. 4 N. R. 39 E. on S.

S. 3 on E. - & S. 4 on N. faces



Subdivisions of T. 4 N. R. 39 E.  
 Willamette Meridian, Oregon.

with 3 notches on E. & W. edges;  
 from which

Aspine 18 ins. dia. brs. Ct. 32° W. 20 lbs.  
 dist. marked T. 5 Ct. R. 39 E. S. 34 B. T.

Afir 16 ins. dia. brs. S. 50° W. 19 lbs.  
 dist. marked T. 4 Ct. R. 39 E. S. 4 B. T.

Afir 6 ins. dia. brs. S. 70° E. 28 lbs.  
 dist. marked T. 4 Ct. R. 39 E. S. 3 B. T.

Land rolling.

Soil 2<sup>d</sup> rate.

Densely covered with forests of  
 pine, fir, spruce & tamarack

81. 24 chs.

Thick undergrowth of alder,  
 shoemaker & spruce 81. 24 chs.

May 2<sup>d</sup> 1884

Subdivisions of T. 4 N. R. 39 E.  
Willamette Meridian, Oregon.

Descend to  
79.68 The cor. to secs. 4, 5, 8 & 9  
Land rolling.  
Soil 2<sup>d</sup> rate.

Densely covered with forests of  
pine, fir, tamarack & spruce

79.68 chs.  
Thick undergrowth of alder,  
shornake & spruce 79.68 chs.

North brk. secs. 4 & 5

Var. 21° E.

Gently ascending along hillside  
facing S.W. through dense forest.

40.00 Spruce tree 12 ins. diam. + 150 ft.  
which I marked 1/4 S on N.  
face for 1/4 sec. cor. -

from which

A fir 12 ins. dia. brs. S. 70° E. 10 lks.  
dist. marked 1/4 S. B.T.

Subdivisions of T. 4 N. R. 39 E.  
Willamette Meridian, Oregon.

Aspine 11 ins. dia. brs.  $N. 46^{\circ} W. 10$  lks.  
dist. marked  $\frac{1}{4}$  S. B. T.

Thence ascend along steep  
hillside facing NW.

81.70 Intersect the 1<sup>st</sup> Standard  
Parallel  $N.$  at a point 24.17  
chs.  $E.$  of the cor. to secs. 32 & 33  
T. 5 N. R. 39 E. - at which  
point I set a spruce post + 250 ft.  
4 ft. long 4 ins. sq. 24 ins. in  
ground for closing cor. to secs.  
4 & 5 marked

C. C. T. 4 N. R. 39 E. on S.

S. 4 " E. 8

S. 5 " W. faces,

with 4 notches on E. & 2

notches on W. wedges;

from which

Aspruce 12 ins. dia. brs.  $N. 35^{\circ} W. 24$  lks.  
dist. marked T. 5 N. R. 39 E. S. 33 B. T.

Aspruce 12 ins. dia. brs.  $S. 42^{\circ} W. 39$  lks.

Subdivisions of T. 4 N. R. 39 E.  
 Willamette Meridian, Oregon.

dist. marked T. 4 N. R. 39 E. S. 5 B. T.  
 Aspruce 24 ins. dia. brs. S. 35 E. 29 lbs.  
 dist. marked T. 4 N. R. 39 E. S. 4 B. T.  
 Land hilly.  
 Soil 2<sup>d</sup> rate.

Densely covered with forests of  
 pine, fir, tamarack & spruce  
 81.70 chs.

Thick undergrowth of alder brush  
 81.70 chs.

May 4<sup>th</sup> 1884

From the cor. to secs. 5, 6, 31 & 32  
 on the S. bdy. of the Twp. which  
 is a post 4 ins. sq. marked  
 T. 4 N. S. 31 on N. W.  
 R. 39 E. S. 32 " N. E.  
 T. 3 S. S. 5 " S. E.  
 S. 6 " S. W. faces, with  
 5 notches on E. & 1 notch on N.

# FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by Frank W. Campbell, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the Subdivisional lines of T. 4 N. R. 39 E. Willamette Meridian, Oregon, showing the respective capacities in which they acted:

- Frank C. Baird, Compassman.
- Frank C. Baird, Chainman.
- William J. Welch, Chainman.
- William J. Welch, Chainman.
- Thomas J. McArthur, Chainman.
- Thomas J. McArthur, Axeman.
- \_\_\_\_\_, Axeman.
- \_\_\_\_\_, Flagman.

## FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted Frank W. Campbell, U. S. Deputy Surveyor, in surveying all those parts or portions of the Subdivisional lines of T. 4 N. R. 39 E. Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction; and that said survey has been, in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- Frank C. Baird, Compassman.
- Frank C. Baird, Chainman.
- William J. Welch, Chainman.
- \_\_\_\_\_, Chainman.
- \_\_\_\_\_, Chainman.
- Thomas J. McArthur, Axeman.
- \_\_\_\_\_, Axeman.
- \_\_\_\_\_, Flagman.

Subscribed and sworn to before me, this 4th day of

June 1884  
 [SEAL] Frank W. Campbell  
Notary Public

FINAL OATH OF DEPUTY SURVEYOR.

I, Frank W. Campbell

United States Deputy Surveyor, do solemnly swear that in pursuance of

instructions received from James R. Tolman

U. S. Surveyor General for Oregon, bearing date of the 10<sup>th</sup>

day of March, 1884, I have well, faith-

fully and truly, in my own proper person, and in strict conformity with  
the instructions furnished by the U. S. Surveyor General for Oregon, the  
Surveying Manual, and the Laws of the United States, surveying all those

parts or portions of the Subdivisional lines  
of T. 4 N. R. 39 E.

Willamette Meridian, in the State of Oregon, as are represented in the  
foregoing Field Notes as having been surveyed by me and under my di-  
rections; and I do further solemnly swear that all the corners of said sur-  
vey have been established and perpetuated in strict accordance with the  
Surveying Manual, Printed Instructions, the Special Written Instructions  
of the U. S. Surveyor General for Oregon, and in the specific manner de-  
scribed in the Field Notes, and that the foregoing are the *true* Field Notes  
of such survey, and should any fraud be detected I will suffer the penalty  
of perjury under the provisions of an Act of Congress approved August  
8th, 1846.

Frank W. Campbell  
U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 4<sup>th</sup>

day of June 1884

J. H. Campbell  
Notary Public

## OFFICE U. S. SURVEYOR GENERAL,

Portland, Oregon, *Oct. 30,* 1884

The following Field Notes of the Survey of the  
*Subdivisions of T. 4 N. R. 39 E.,*  
*Will. Mer., Oregon*

executed by *Frank W. Campbell*

under his Contract No. *498*, dated *March*  
*10th*, 1884, having been critically examined,

the necessary corrections and explanations made, the said  
Field Notes and the survey they describe are hereby approved.

*James C. Tolman*  
Surveyor General.

