

FIELD NOTES

223

Of the survey of the Subdivisional

Lines of Township 3 South

Range 33 East of, Willamette Meridian,

Oregon, as surveyed by Rufus S. Moore

U. S. Deputy Surveyor, under his Contract No. 451

dated June 28th, 1882

Survey commenced, November 22nd 1882

Survey completed, November 29th 1882

NAMES AND DUTIES OF ASSISTANTS.

....., Compassman.

James Guttridge, Chainman.

John Guttridge, Chainman.


....., Chainman.

....., Chainman.

Joe Parodi, Axeman.

....., Axeman.

....., Flagman.

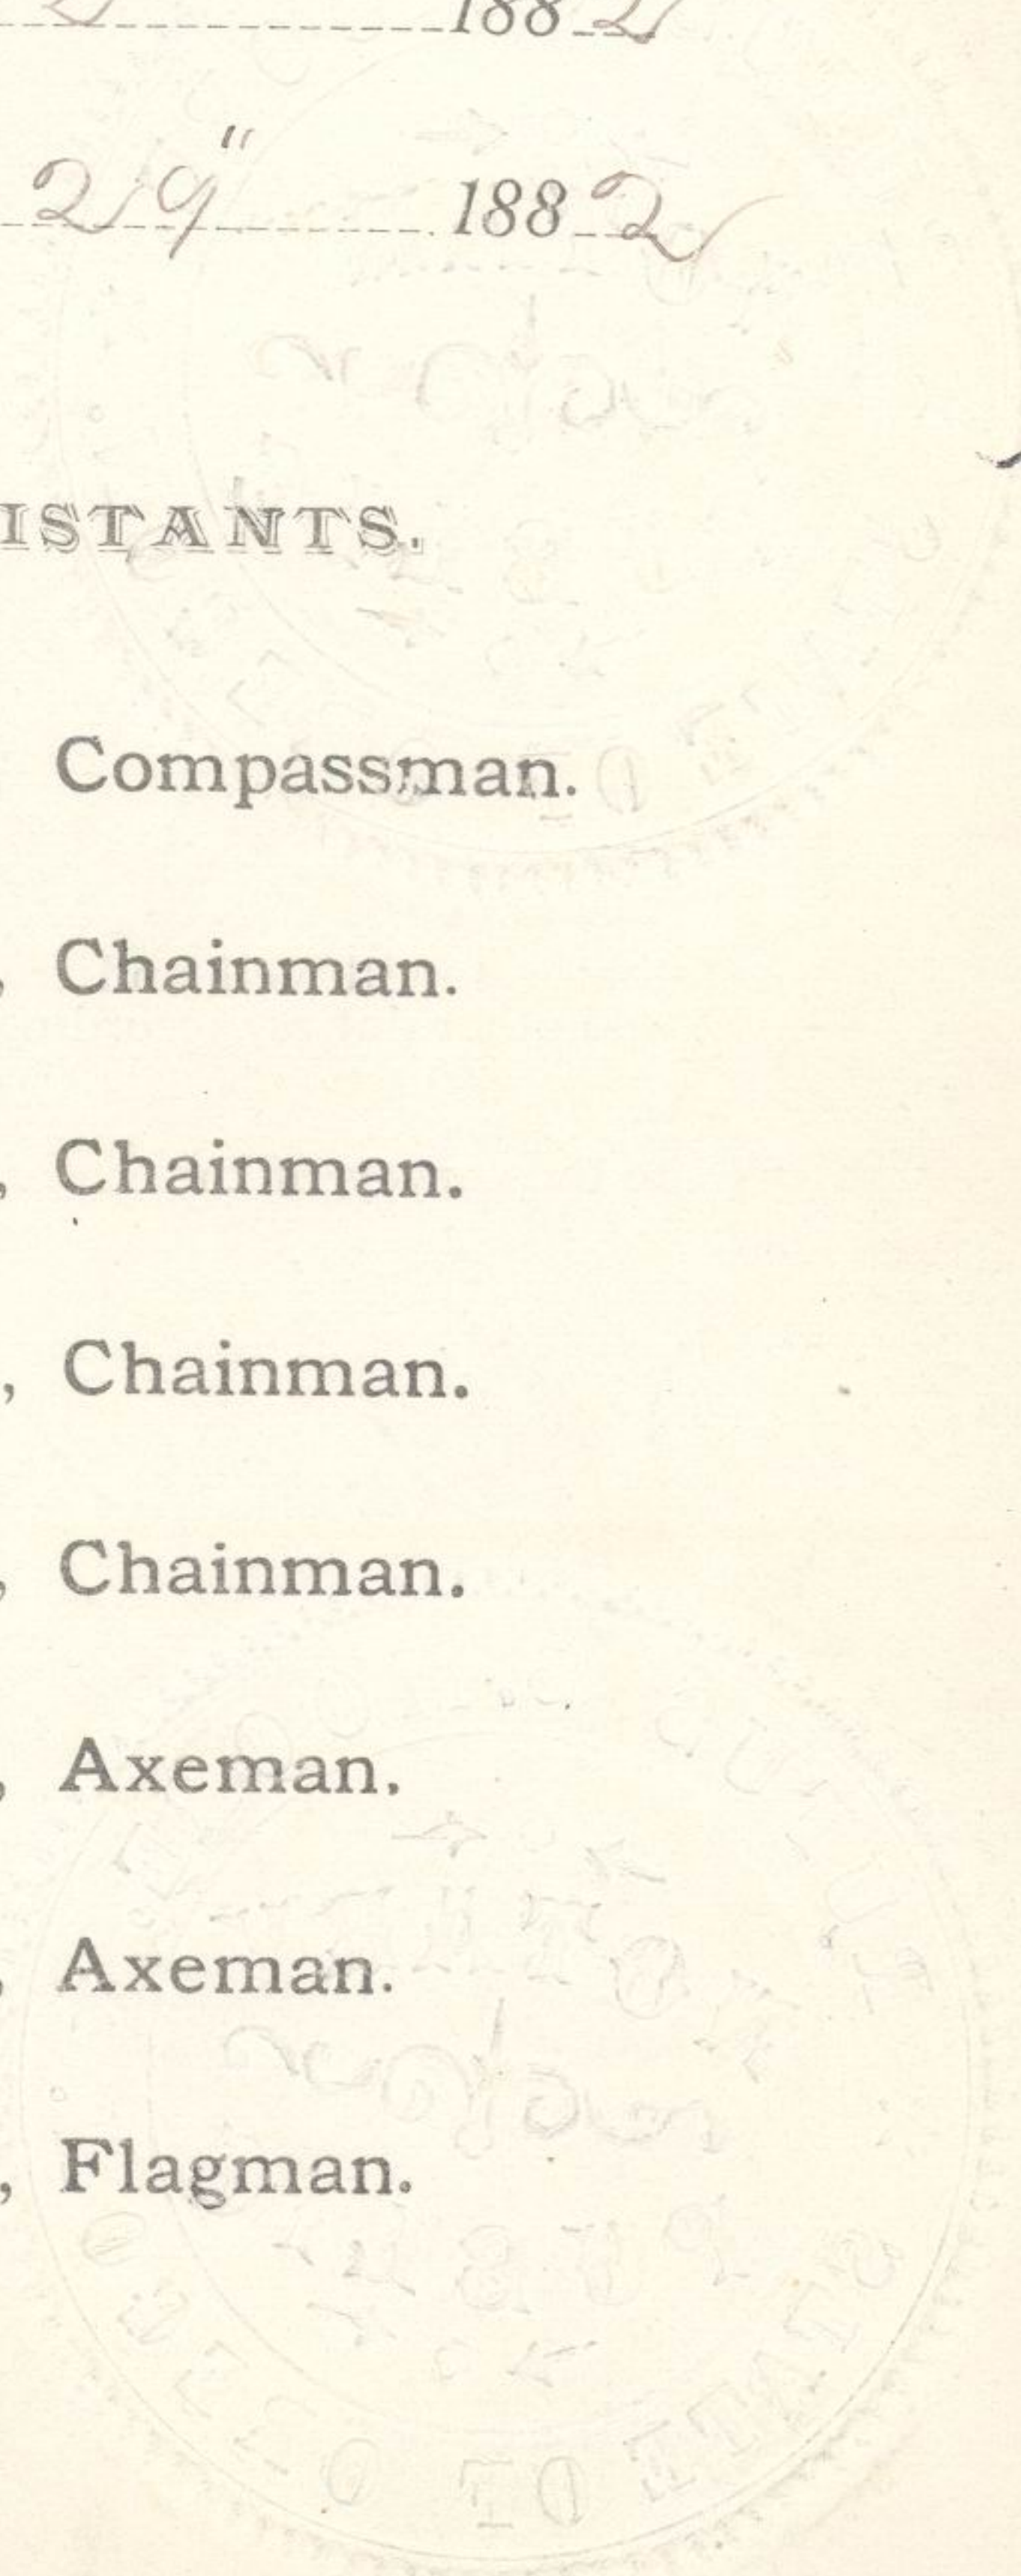

224

PRELIMINARY OATHS OF ASSISTANTS:

We, James Guttridge and
John Guttridge

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Subdivisional

lines of Township 3 South

Range 33 East of Willamette Meridian, Oregon.

James Guttridge, Chainman.

John Guttridge, Chainman.

, Chainman.

, Chainman.

Subscribed and sworn to before me, this Fifteenth

day of August 1882

[SEAL.]

Rufus S. Moore
Notary Public

We, _____ and _____

Joe Parodi, do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability,

in the survey of the Subdivisional lines of

Township 3 South R. 33E of Willamette Meridian, Oregon.

Joe Parodi, Axeman.

, Axeman.

Subscribed and sworn to before me, this Fifteenth

day of August 1882

[SEAL.]

Rufus S. Moore
Notary Public

INDEX.

Referring the Lines to the Pages of the field Notes.

T. 3 South R. 33 East Will. Mer.

6	97	5	69	4	51	3	33	2	16	1
95		94		68		50		32		15
7	92	8	66	9	48	10	31	11	14	12
90		89		64		47		29		12
18	87	17	62	16	45	15	28	14	10	13
85		84		61		44		26		9
19	82	20	59	21	42	22	24	23	7	24
80		78		58		41		23		5
30	76	29	56	28	39	27	21	26	4	25
75		74		55		38		20		2
31	72	32	53	33	36	34	18	35	0	36

Meanders of _____ Pages _____ to _____

Meanders of _____ Pages _____ to _____

Subdivision of T. 3 South R. 33 East

Willamette Meridian, Oregon.

Preliminary to commencing this survey I run $N 89^{\circ} 50' W$ on a blank line on the South boundary of Sec. 36 and at 40.04 chs found the $1/4$ Sec. corner and at 80.00 found the Sec. corner. As the East boundary was run with the same Compass and assistants I do not remember my compass will therefore run the same line as the Exterior boundary and the chaining practically agrees

Survey commenced November 22nd 1882 with a Burt's improved Solar Compass

Began at corner to Secs 1, 2, 35 + 36 on South boundary which is a Basalt Stone $18 \times 12 \times 6$ ^{ins} firmly set in ground with 1 notch on E and 5 notches on W edges from which:

- Apr 8 in diam bears $N 70^{\circ} E$. 71 lbs dist marked J 3 D R 33 E D 36 B J
 - Apr 8 " " " $S 36^{\circ} E$ 39 " " marked J 4 D R 33 E D 1 B J
 - A " 7 " " " $S 47^{\circ} W$ 30 " " marked J 4 D R 33 E D 2 B J
 - A " 9 " " " $N 67^{\circ} W$ 60 " " marked J 3 D R 33 E D 35 B J
- Hence I run

Subdivisions of T. 3 South R. 33 East
Willamette Meridian, Oregon.

From the cor. to Secs. 2, 3, 34 + 35
on the South boundary of the town-
ship, which is a Basalt Stone
16 x 10 x 5 ins. Set firmly in the ground
marked with 2 notches on E. & 4 notches on Wedge
with mound of stone along side
from which

A pine 24 ins. in dia. bears S 21° E 136 lks.

dist. marked T 4 S R 33 E S 2 B J

A pine 10 ins. in dia. bears S 51° W 89 lks.
dist. marked T 4 S R 33 E S 3 B J

A pine 9 ins. in dia. bears N 69° W 68 lks. dist.
marked T 3 S R 33 E S 34 B J

Ascend
North between Secs. 34 + 35
Va. 24° E

Ascend

12.00 Top of hill bears E + W. 150 ft.
above Sec. cor.

40.00 Set a Basalt Stone 18 x 15 x 5 ins. 12 ins.
in ground for $\frac{1}{4}$ sec. cor. marked
 $\frac{1}{4}$ on W. face. from which

A pine 7 ins. in dia. bears N 48° E 15 lks.
dist. marked $\frac{1}{4}$ S B J

A pine 18 ins. in dia. bears S 53° W 49 lks.
dist. marked $\frac{1}{4}$ S B J

55.00 Descent hill bears NW + SE

80.00 Set a Basalt Stone 18 x 15 x 6 ins. 12 ins.
in ground for cor. to secs.

Subdivisions of T. 3 South R. 33 East

Willamette Meridian, Oregon.

From the corner to Sec 3. 4,
33 + 34 on South boundary of the
Township which is A Basalt Stone
16 x 10 x 5 in marked with 3 notches on E & W. edges
from which
April 12 in diary bears S 82° E 113 lb dist
marked J 4 & R 33 E & D 3 B J
A " 20 " " " " N 40° W 168 " "
marked J 3 & R 33 E & D 33 B J
with mound of Stone alongside of corner
I run

North Between Sec 33 + 34, $\text{WA } 21^{\circ} 15' \text{ E}$
357.00 Run corner S. E.

4000 Set Basalt Stone 16 x 12 x 5 in ^{12 in}
in ground for 4 ft. corner.
marked 14 on N. face
from which:

April 20 in diary bears N 27° E 96 lb dist
marked 14 S. B. J.

April in diary bears S 85° W 143 lb dist
marked 14 S. B. J.

68.90 Brook 3 lb wide cross E.
Ascend,

757.00 Top of hill bears N 70° W S. C.

8000 Set post 4 ft long 4 in square

Subdivision of T. 3 South R. 33 East

Willamette Meridian, Oregon.

From the Corner to Sec 32, 33,

4 + 5 on South boundary of
 Township which is 8 mi deers
 marked J3 & D 33 on N E - R 33 E & 4 on D E
 J4 & D 5 on D W and D 32 on NW face, with 4
 notches on E and 2 notches on W. edges, from which

Apri 8 mi deers bears N 14° E 33 lbs dist

marked J3 & R 33 E & 33 B J
 Apri 10 " " " S 44° E 15 " "

marked J4 & R 33 E & 4 B J
 A 8 " " " S 54° W 14 " "

marked J4 & R 33 E & 5 B J
 A " 10 " " " N 58° W 56 " "

marked J3 & R 33 E & 32 B J

I now:

South Between Secs 32 + 33

va. 22° E.

4000 ft post 3 ft long 3 mi square

24 mi in ground for 14 Sec. corner.

marked 14 S. on N face

from which:

Apri 8 mi deers bears N 86° W 52 lbs dist

marked 14 S. B. J.

Apri 3 1/2 mi deers bears S 18° E 31 lbs dist

marked 14 S. B. J.

8000 ft post 4 ft long 4 mi square

24 mi in ground for Cor to Secs

8, 9, 32 + 33 - marked

J. 3. S. S 38 on N E.

Subdivision of T. 3 South R. 33 East
Willamette Meridian, Oregon.

From the corner to Secs 31, 32, 5 & 6
on South boundary of Township
which is a Basett Stone
18 x 10 x 3^{1/2} marked with 1 notch
on N and 5 on E edges!

From which:

Apri 5 mi diam bears N 60° E 19 lts dist
marked F 3 D R 33 E D 32 D J
A Lamarack 12 " " " S 12° E 13 " "
marked F 4 D R 33 E D 5 B J
Apri 7 " " " S 62° W 23 " "
marked F 4 D R 33 E D 6 B J
A Lamarack 10 " " " N 58° W 11 " "
marked F 3 D R 33 E D 31 B J
run:

North Between Secs 31 & 32,
70.21° 15' E.
Gradually descend through
dense Black pine Grove

26.50 Ravine course S. E.

4000 Set Basett Stone 14 x 10 x 5^{1/2} 8 mi
mi ground for 14 Sec. corner.
marked 14 on N face.
From which:

Apri 9 mi diam bears S 28° W 47 lts dist
marked 14 S. B. S.

Apri 20 mi diam bears East 12 lts dist

FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by _____

Rufus S. Moore, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the Subdivisional

lines of Township 3 South
Range 33 East of Willamette Meridian, Oregon, showing the respective capacities in which they acted :

- _____, Compassman.
- James Guttridge, Chainman.
- John Guttridge, Chainman.
- _____, Chainman.
- _____, Chainman.
- Joe Parodi, Axeman.
- _____, Axeman.
- _____, Flagman.

FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted Rufus S. Moore

_____, U. S. Deputy Surveyor, in surveying all those parts or portions of the Subdivisional

lines of Township 3 South
Range 33 East of Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction ; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- _____, Compassman.
- James Guttridge, Chainman.
- John Guttridge, Chainman.
- _____, Chainman.
- _____, Chainman.
- Joe Parodi, Axeman.
- _____, Axeman.
- _____, Flagman.

Subscribed and sworn to before me, this Thirtieth day of November 1882

[SEAL.]

Rufus S. Moore
Notary Public

FINAL OATH OF DEPUTY SURVEYOR.

I, Rufus S. Moore
 United States Deputy Surveyor, do solemnly swear that in pursuance of in-
 structions received from James B. Tolman
 U. S. Surveyor General for Oregon, bearing date of the Twelfth
 day of June, 1882, I have well, faith-
 fully and truly, in my own proper person, and in strict conformity with
 the instructions furnished by the U. S. Surveyor General for Oregon, the
 Surveying Manual, and the laws of the United States, surveying all those
 parts or portions of The Subdivisions at lines
of Township 3 North - Range 33 East of
 Willamette Meridian, in the State of Oregon, as are represented in the fore-
 going Field Notes as having been surveyed by me and under my directions;
 and I do further solemnly swear that all the corners of said survey have been
 established and perpetuated in strict accordance with the Surveying Manual,
 printed instructions, the special written instructions of the U. S. Surveyor
 General for Oregon, and in the specific manner described in the field notes,
 and that the foregoing are the *true* field notes of such survey, and should
 any fraud be detected I will suffer the penalty of perjury under the pro-
 visions of an Act of Congress approved August 8, 1846.

Rufus S. Moore
 U. S. Deputy Surveyor.

Subscribed and sworn to before me, this 10th
 day of February 1883

Bamford Robb
 Notary Public

334

Office U. S. Surveyor General,

Portland, Oregon, *June 5* 188*3*

The following Field Notes of the Survey of the

Subdivisional lines of
T. 3 S. R. 33 E.

Will. Mer. Or.

executed by

Rufus S. Moore

under his Contract No. *451*, dated

June
12th 188*2*, having been critically examined, the

necessary corrections and explanations made, the said field notes

and the survey they describe, are hereby approved.

James C. Tolman

Surveyor General.

