

~~100~~  
100B

# Index

(Referring the lines to the pages of the field notes)

Town, 5 North, Range 31 East, Will. Mer.

6	37	5	28	4	21	3	14	2	7	1
37		36		27		21		14		7
7	36	8	26	9	20	10	13	11	6	12
35		35		26		19		12		5
18	34	17	25	16	19	15	12	14	5	13
33		33		25		18		11		4
19	32	20	24	21	18	22	10	23	3	24
31		31		23		17		10		3
30	30	29	23	28	16	27	9	26	2	25
29		29		22		16		8		1
31	28	32	22	33	15	34	8	35	1	36



7  
1001

# Subdivisional lines of Township No. 7

From the corner to Sec 35 & 36 in the South  
Boundary of the Township I run  
North between Secs 35 & 36

40.00 Drove charred stake and  
raised mound of earth  
with pits &c as per instruc-  
tion for 1/4 Sec. Cor. +40

80.00 Drove charred stake and  
raised mound of earth  
with pits &c as per in-  
structions for: Cor. to  
Secs 25, 26, 35 & 36 -40

Drove Willow Stake 2 ft. dia  
long. 2 in. dia. in S. E. pit.  
Land rolling  
Soil 1/4 part. good grass.

East on random line between Secs 25 & 36

40.00 Set temporary 1/4 Sec. Cor.

80.00 Intersect East boundary  
of Township 70 N. North  
of the corner.

N 89° 30' West on true line

40.00 Drove charred stake +100



5 North of Range N<sup>o</sup> 31 East, Will. Mex

and raised mound of  
Earth with pits &c as  
per instructions for 1/4 Sec. Cor.  
The Corner.

80.00

Land polling. Soil 1<sup>st</sup> rate  
Good grass

North between Secs 25 + 26  
Var. 21° East

15.50

Ravine course West.

- 104

40.00

Drove charred Stake &  
raised mound of Earth  
with pits &c as per  
instructions for 1/4 Sec. Cor.

+ 50

80.00

Drove charred Stake &  
raised mound of Earth  
with pits &c as per  
instructions for Cor.  
to Secs 23, 24, 25 + 26,

+ 75

Drove Willow Stake 2 ft  
long Soil 1<sup>st</sup> rate S. E. pit.

Land slopes toward Ravine  
Soil 1<sup>st</sup> rate.  
Good grass.



3

103

## Subdivisional lines of Township No 5

East on random line between Secs 24 + 25

40.00 Set Temporary  $\frac{1}{4}$  Sec. Cor80.85 Interest East boundary  
of Township 53  $\frac{1}{2}$  S South  
of the corner

889°37' West on true line

40.42 Drove chanced stake  
and raised mound of  
Earth with pits &c as per  
instructions for  $\frac{1}{4}$  Sec. Cor

80.85 The corner.

Lana rolling  
Soil  $\frac{1}{4}$  rate.

found pens.

North between Secs 23 + 24.

Lat 20°45' East

38.00 Ravine course S. W.

- 75.

40.00 Drove chanced stake

+ 25.

and raised mound  
of Earth with pits &c as per  
instructions for  $\frac{1}{4}$  Sec. Cor.

80.00 Drove chanced stake

and raised mound of

+ 50.



North. Range, N<sup>o</sup> 37 East, Trill. Meridian

East, with pits &c as per instructions for Secs 13, 14, 23 & 24,

Drove Willow Stake 2 ft long, 2 in Sq. in S. E. pit, Land polling, Soil 1<sup>st</sup> rate Good Grass

East on random line between Secs 13 + 24

40.00, Set temporary 1/4 Sec. Cor.

80.08 Intersect East boundary of Township 132 W. South of the corner.

89° 03' West on true line

40.04 Drove charred Stake and run in mound of earth with pits &c as per instructions for 1/4 Sec. Cor.

80.08 The Corner.

Land polling Soil 1<sup>st</sup> rate

Poor grass Oct 22<sup>nd</sup> 1874

Note Retraced the E. boundary of Sec. 24 and found it to be 80.96 chains length, and the corner to Secs. 13 + 24 to be 91 links W. of the corner to Secs. 23 + 25.



5

105

## Subdivisional line of Township No 5-

North between Secs 13 &amp; 14

Feb. 20<sup>th</sup> 31<sup>st</sup> East

40.00 Drove channeled stake and  
passed mound of earth  
with pits &c as per  
instructions for 1/4 Sec. line

80.00 Drove channeled stake  
and passed mound  
of earth with pits &c as  
per instructions for Cor to  
Secs 11, 12, 13 & 14.

Drove Willow Stake 2 ft  
long 2 in diam in S. E. pit.  
Land pretty rolling  
Soil 1<sup>st</sup> rate. Good Grass

East on random line between Secs 12 &amp; 13

40.00 Set temporary 1/4 Sec. corner

80.42 Intersect East boundary  
of Township 184 1/2<sup>mi</sup> South  
of the Corner.

188<sup>th</sup> 41<sup>st</sup> West on true line

40.21 Drove channeled stake and  
passed mound of earth



North Range N<sup>o</sup> 37 East, Will. Meridian

with pits &c as per instructions for 1/4 Sec. Cow

84.42 The Corner.

Land rolling. Soil 1/4 acre  
Good grass.

North between Secs 11 & 12

Var 21° 30' East

40.00 Drive corner stake and  
mound of earth  
with pits &c as per instructions  
for 1/4 Sec. Cow

80.00 Drive corner stake and  
mound of earth  
with pits &c as per instructions  
for Secs 1, 2, 11  
& 12. Drive Willow Stake  
2 ft long 2 in. square in  
S. E. pt.

Land partly rolling  
Soil 1/4 acre  
Good grass



7 107

# Subdivisional Line of Township No. -

East on sundom line between Secs 1 & 12

40.00 Set temporary  $\frac{1}{4}$  Sec. Cor.

79.53 Intersect East boundary of Township 262 to South of the Corner.

S  $88^{\circ} 08'$  West on true line

39.76 Drive chain stake and passed mound of Earth with pits &c as per instructions for  $\frac{1}{4}$  Sec. Cor. + 75

79.53 The Corner.

Land rolling  
Soil  $1\frac{1}{2}$  rate. Good. Grass

North on sundom line between Secs 1 & 2.

For  $2.0^{\circ}$  East

40.00 Set temporary  $\frac{1}{4}$  Sec. Cor.

78.70 Intersect North boundary of Township 348 to East of Corner.

S  $2^{\circ} 28'$  East on true line

38.70 Drive chain stake and passed mound of Earth with pits &c as



5 North, Range No 31 East, 6th Meridian

78.70 per instructions for 1/4 Sec Cor  
The corner.

Same rolling, Soil 1/2 mts  
Good grass

Note - See resurvey of Exterior Boundaries of this Trp.

40.00 North between Secs 34 + 35  
Drove charice Stake  
and raised mound  
of earth with pits &c  
as per instructions for 1/4  
Sec. Cor.

79.75 Run of Spring Water Canon - 100  
course S.W.

89.00 Set Basalt Stone 12 x 10 x 7  
6 in in ground for cor  
to Secs 26, 27, 34 + 35.  
Same rolling, Soil 1/2 mts  
Good grass  
Fresh water spring 30  
ft S.W. of Corner.

East on random line between Secs 26 + 35

40.00 Set Temporary 1/4 Sec. Cor

80.30 Intersect N + S line 2.39



91109

Subdivisional lines of Township No 5

To south of the corner.

788°18' West on true line.

40.15 Drive Chained Stake  
and surface ground  
of Earth with pits &c  
as per instructions for  
1/4 Sec. Cor.

80.00 Enter Spring Water Course - 100  
course South West.

80.30 The corner  
Land polling, Soil 1<sup>st</sup>/<sub>11</sub>  
mte. some grass.

Note See resurvey of Exterior Boundaries of this Twp.

North between Secs 26 + 27  
for 21' East

40.00 Drive Chained Stake  
and surface ground  
of Earth with pits &c  
as per instructions for  
1/4 Sec. Cor.

58.00 Runners' course S W - 125-

80.00 Drive Chained Stake + 125-  
and surface ground  
of Earth with pits &c



North Range No 37 East. Mill. Meridian

as per instructions for  
lev to Secs 22, 23, 26 + 27  
Drove pine Stake 2ft long  
2 in square in S. E. pit,  
Lamin polling,  
Loc 1<sup>st</sup> site,  
fool fuss,  
Oct 26<sup>th</sup> 1874

East on random line between Sec 23 + 26  
40 00 Set trip way  $\frac{1}{4}$  Sec. Cor.  
80.28 Intersect of 18 line 185  
is north of the corner  
N 88° W on true line.  
3.2 00 Run in corner S. W. - 80  
40 14 Set Basalt Stone 16 x 10 x 5  
8 in in square for  $\frac{1}{4}$  Sec. Cor.  
80.28 The corner + 75  
Lamin polling  
Loc 1<sup>st</sup> site fool fuss

North between Secs 22 + 23  
Our 2<sup>nd</sup> East

40 00 Drove chosen Stake and



11

Subdivisional lines of Township No. 11

raised mound of Earth  
with pits &c as per  
instructions for 1/4 Sec. Corn

80.00

Drove Chained Stake  
and raised mound  
of Earth with pits  
&c as per instructions  
for Corn to Secs 14, 15, 22 + 23.

Drove Fir Stake 2 ft long  
2 mi. S. E. in S. E. pit  
Land rolling.

Soil 1/4 rate.

Good Grass.

East on random line between Secs 14 + 23

40.00 Set temporary 1/4 Sec Corn

80.05 Intersect N + S line 194

W North of the corner.

N 88° 37' West on true line

40.03 Drove Chained Stake

and raised mound  
of Earth with pits &c  
as per instructions for  
1/4 Sec. Corn.

- 30



5 North, Range No 31 East, Hill Area

80.05 The corner.

+ 49

Same pretty rolling,  
Soil 1/5 mte. Good Grass

North between Secs 14 + 15  
Far 21°30' East

40.00 Drove chain a stake

- 75

and pushed mound  
of Earth with pits &c  
as per instructions for  
1/4 Sec. Cor.

80.04 Drove chain a stake

+ 40

and pushed mound  
of Earth with pits &c  
as per instructions for  
Cor to Secs 10, 11, 14 + 15

Drove Alder Stake 2 ft  
long in Syam in S E pit.  
Same rolling. Soil 1/7 mte  
Good grass

East on sundown line between Secs 11 + 14  
40.00 Set temporary 1/4 Sec. Cor.



# Subdivisional Lines of Township No. 3

80.24 Intersect of S. S. Line 203  
 1/4<sup>th</sup> North of the Cor.

of  $88^{\circ}33'$  West on true line

40.12 Drove chanced stake  
 and raised mound  
 of Earth with pits &c  
 as per instructions for  
 1/4 Sec. corner.

80.24 The corner,

Same polling Soci<sup>ty</sup> 1<sup>st</sup> rate  
 Poor guess

---

North between Secs 10 & 11

Var  $21^{\circ}15'$  East.

40.00 Drove chanced stake and  
 raised mound of  
 Earth with pits &c as  
 per instructions for 1/4  
 Sec. corner.

80.00 Drove chanced stake and  
 raised mound of Earth  
 with pits &c as per instru-  
 tions for Cert. Secs 2, 3, 10 & 11  
 Drove along stake 2 ft long



North Range N: 31 East Willanette Mer.

2 mi square in S. E. pt  
Same rolling soil 1 1/4 mts  
Good grass

East on random line between Secs 2+11

4000 Set temporary 1/4 Sec. Cor

79.95 Intersect N 45 line 233 W

North of the corner

N 88° 20' West on true line

39.97 Drove chain stake and

marker mound of earth

with pits &c as per

instructions for 1/4 Sec. Cor.

79.95 The corner

Same rolling

Soil 1 1/4 mts. Good grass

North on random line between Secs 2+3

Dir. 21° 15' East

4000 Set temporary 1/4 Sec. Cor.

76.38 Intersect North boundary

of Township 369 W East

of the corner



15-

115

Subdivisional Lines of Township No. 5-

S 2° 38' East on true line

36.38 Drove around Stake and  
raised mound of  
Earth with pits &c as  
per instructions for  
1/4 Sec. lev.

76.38 The corner  
Same polling  
Sec 1 1/4 rate for lev

North between Secs 33 + 34

40.00 Drove around Stake  
and raised mound  
of Earth with pits &c  
as per instructions for  
1/4 Sec. lev.

51.50 Spring Water Course  
course N.W. — 50

60.00 Corner course S.W.

80.00 Drove around Stake  
and raised mound  
of Earth with pits &c  
as per instructions for  
corner to Secs 27, 28, 33 + 34. + 75



North Range N<sup>o</sup> 31 East. Well. Mer.

Drove from State Lft  
by Lin' Symmeri S.E.  
pit.

Lamin rolling.

Soil 1<sup>st</sup> pit.

Good grass.

Oct 27<sup>th</sup> 1874

East on sundown line between Secs 27 & 34

40 00 Set temporary 1/4 Sec Cor.

80 40 Intersect N & S line at Cor

West on true line

40 20 Drove chance State + 75

line. raised mound

of earth with pits &c

as per instructions

for 1/4 Sec. Cor.

80 40 The lesson.

Lamin rolling

Soil 1<sup>st</sup> pit

Good grass

North between Secs 27 & 28

For 2<sup>nd</sup> East

40 00 Set Bureau Stone 14 x 8 x 6



17

117  
Subdivisional limits of Township N<sup>o</sup> 11

7 mi in ground for 1/4 Sec.  
Corner

80.00

Drove chanced stake  
and raised mound  
of Earth with pits &c  
as per instructions for  
Cor to Secs 21, 22, 27  
& 28. drove Pmi stake 2 ft  
long 2 in square in S E pit  
Lime rolling soil 1/4 sec.  
Good grass

Cut on random line between Secs 22 & 27

40.00

Set temporary 1/4 Sec. Cor

80.30

Intersect N & S line  
at corner

Get on true line

40.15

Drove chanced stake  
and raised mound  
of Earth with pits &c  
as per instructions for  
1/4 Sec. Cor

80.30

The Corner  
Lime rolling soil 1/4 sec.



5 North Range No 31 East, Mile Spur,

North between Secs 21 + 22,

Sur. 21° 30' East

40.00 Drove charred stake  
and pushed mound  
of earth with pits &c  
as per instructions  
for 1/4 Sec. corner

80.00 Drove charred stake — 30  
and pushed mound  
of earth with pits  
&c as per instructions  
for Cor to Secs 15, 16  
21 + 22. Drove Pine Stake  
2 ft long 2 in square in S E pit  
land polling  
Soil 1/4 rate

East on survey line between Secs 15 + 22,

40.00 Set temporary 1/4 Sec. Cor.

80.00 Pushed 1/4 Sec. line at Cor.  
then on true line

40.00 Drove charred stake and  
pushed mound of earth  
with pits &c as per instruc-  
tions for 1/4 Sec. Cor.



Sub-divisional lines of Township No 5

80 00

The corner.

Land rolling.

Soil 1<sup>st</sup> rate.

Good grass.

North between Secs 15 + 16

Bearing 21° East

40 00

Drove charred stake and  
raised mound of earth  
with pits &c as per instructions  
for 1/4 Sec Cor.

+ 80

80 00

Drove charred stake and  
raised mound of earth  
with pits &c as per instruc-  
tions for Cor to Sec 9, 10  
15 + 16. Drove Alder stake  
2ft long 2in. dia. in S.E. pit.  
Land rolling Soil 1<sup>st</sup> rate  
Good grass.

+ 30

East on random line between Secs 10 + 15

40 00

Set temporary 1/4 Sec. Cor.

80 00

Intersect N + S line 7 1/2 S



1120

North Range No 31 East, Millanuth Area

of the corner.

889°57' West on true line

4000 Drove charred stake and  
pursue mound of  
Earth with pits &c as per  
instructions for 1/4 Sec. Cor.

81100 The corner.

Some polling. Soil 1/4 mile  
from pass.

North between Secs. 9 & 10

Cor. 21°15' East

4000 Drove charred stake and  
pursue mound of Earth  
with pits &c as per instructions  
for 1/4 Sec. Cor.

81100 Drove charred stake

and pursue mound of  
Earth with pits &c as per  
instructions for Cor to  
Secs 3, 4, 9 & 10. Drove  
yellow stake 1/4 way line  
square in S. E. pit.

Some polling. Soil 1/4 mile



21  
121

Subdivisional line of Township No. 5

East on random line between Secs 9 + 10

40.00 Set temporary 1/4 Sec. Cor.

80.00 Intersect N + S line at Cor.  
West on true line.

40.00 Drove chain stake  
and raised mound  
of earth with pits &c  
as per instructions for  
1/4 Sec. Cor.

80.00 The corner.  
Land rolling.  
Set line into

North on random line between Secs 3 + 4

Var. 21° 30' East

40.00 Set temporary 1/4 Sec. Cor.

75.75 Intersect North boundary  
of Township 42 1/2 Sec. East  
of the corner.

S 3° E on true line

35.75 Drove chain stake and  
raised mound of earth  
with pits &c as per instruc-  
tions for 1/4 Sec. Cor.



North Range Sp 31 East, Willamette Mer.

75.75 The corner. — 50

Land partly rolling.

Soil  $\frac{1}{2}$  mts.

Oct 28<sup>th</sup> 1874

North between Secs 32 + 33

40.00 Set Basalt Stone 15 x 8 x 5, 7  
in in ground for  $\frac{1}{4}$  Sec. cor.

67.00 Spring Water Canon corner N.W. — 150

80.00 Set Basalt Stone 18 x 6 x 6, 9  
in in ground bet. to Secs  
28, 29, 32 + 33.

Land rolling. Soil  $\frac{1}{2}$  mts.

Good grass.

East on random line between Secs 28 + 33

40.00 Set temporary  $\frac{1}{4}$  Sec. cor.

80.84 Instrument 48 lbs  
North of corner.

N 89° 21' West on true line

40.40 Drove chiseled stake and — 50

raised mound of earth  
with pits &c as per instructions  
for  $\frac{1}{4}$  Sec. cor.



23

123

Subdivisional lines of Township No 5 North

80.80 The corner  
 Sand rolling. Soil  $1\frac{1}{2}$  ft. deep.  
 good grass.

North between Secs 28 + 29  
 Var.  $21^\circ$  East.

40.00 Dipnet Basalt Stone  $4 \times 4 \times 3$   
 marked with a cross (+)  
 and raised mound of  
 earth with pits etc as  
 per instructions for  $\frac{1}{4}$   
 Sec. corner

80.00 Set Basalt Stone  $12 \times 8 \times 6$   
 in in ground. Corner to Secs  
 20. 21. 28 + 29,  
 Sand rolling, Soil  $1\frac{1}{2}$  ft. deep,  
 good grass.

Corner on subdivision line between Secs 21 + 28

40.00 Set temporary  $\frac{1}{4}$  Sec. corner

80.70 Intersection of S. line 63  $\frac{1}{4}$  Sec. corner  
 of the corner.

N  $89^\circ 33'$  West on true line



Range No 31 East Willamette Mendocino

41.35 Drive charred Stake and  
mound of Earth  
with pits &c as per instruc-  
tions for 1/4 Sec. Corn

80.70 The corner  
Same polling. Set 1/2 pole  
four fms.

North between Secs 20 & 21  
- for 20° 30' East.

40.00 Drive charred Stake and  
mound of Earth with  
pits &c as per instructions for  
1/4 Sec. Corner.

80.00 Drive charred Stake and  
mound of Earth with  
pits &c as per instructions for  
Cen to Secs 16, 17, 20 & 21  
Drive Alder Stake 2 ft. long  
2 in square in S. E. pit.  
Same polling. Set 1/2 pole  
four fms.



25  
125

Subdivisional Line of Township N<sup>o</sup> 5 North

East on random line between Secs 16 + 21

40.00 Set temporary 1/4 Sec. Cor.

80.00 Intersect N + S line 56 ln North  
of the corner.

N 89° 36' West on true line

40.30 Drive chance stake and  
raise mound of earth  
with pits &c as per instruc-  
tions for 1/4 Sec. Cor.

80.00 The corner.  
Sand rolling, soil 1 1/2 ft  
good grass.

North between Secs 16 + 17

Cor. 21° 15' East

40.00 Drive chance stake and  
raise mound of earth  
with pits &c as per instructions  
for 1/4 Sec. Cor. + 100

80.00 Drive chance stake and  
raise mound of earth  
with pits &c as per instructions  
for Cor to Secs 8, 9, 16 + 17 + 30  
Drive Alder Stake 2 ft long



Range No. 31 East. Willamette Meridian

2 in square in S. E. pit.

Same rolling. Soil 1<sup>st</sup> pit

Good grass.

East on random line between Secs 9 & 16

4000 Set Temporary 1/4 Sec. Corn

80.58 Intersect of S line 26 to south  
of the corner

N 89° 49' Run on true line

4029 Drove charron Stake and

raised mound of Earth  
with pits &c as per instruc-

tions for 1/4 Sec. Corn.

80.58 The corner.

Same gently rolling

Soil 2<sup>nd</sup> pit good grass.

North between Secs 8 & 9.

Var. 21° East

4000 Drove charron Stake and

raised mound of Earth

with pits &c as per instructions

for 1/4 Sec. Corn.



27

Subdivisional Line of Township N<sup>o</sup> 5 North

811.111 Drive Charred Stake and  
pursue mound of Earth  
with pits &c as per instructions  
for Carte Secs 4, 5, 8 + 9.

Drive Willow Stake 2ft long 2 in  
Square in S. E. pit.

Land partly pollard  
Soil 2<sup>nd</sup> rate.

East on random line between Secs 4 + 9

4000 Set Temporary 1/4 Sec. Cor

80.22 Intersect of rd line 30 W  
North of the corner

N 89° 47' West on true line

411.11 Drive Charred Stake and + 40  
pursue mound of Earth  
with pits &c as per instructions  
for 1/4 Sec. Cor.

80.22 The corner - 60  
Land pollard Soil 2<sup>nd</sup> rate  
good grass.



Russys No. 31 East. Williamsburg Standard.

North on random line between Secs 4 + 5

Dir. 21° East

4000 Set temporary 1/4 Sec. Cor.

75.30 Intersect North boundary of Township 5-95 W East of the corner

S 4° 15' East on true line

35.20 Drive choned stake and raised mound of Earth with pits &c as per instructions for 1/4 Sec. Cor.

75.30 The corner

Same following, Set the pits from mass.

Oct. 29<sup>th</sup> 1874

North between Secs 31 + 32.

40.00 Deposit Basalt Stone 5x5x4 <sup>marked with a cross</sup> &

raised mound of Earth with pits &c as per instructions for 1/4 Sec. Cor.

80.00 Deposit Basalt Stone 6x4x4 marked with a

cross and raised mound of Earth with pits &c as per instructions for Cor to Sec.



29

129

Subdivisional lines of Township No. 5

29, 30, 31 & 32, Drive Alder  
Stake 2ft long 2in square  
in S. E. pit for

Large partly pollard  
Soil Ma. rate  
Jove grass.

East on random line between Secs 29 & 32

40.00 Set temporary 1/4 Sec. Corn

80.59 Intersect N & S line 215 W. N. of Cor.

N 88° 28' West on true line

44.29 Drive Busell Stone 5 x 4 x 4  
marked with a cross (+) and  
marked around of Earth  
with pits &c as per instruc-  
tions for 1/4 Sec. Corn

46.00 Spring Water Canon course N

- 75

80.59 The corner.

+ 100

Large pollard Soil 1/2 rate  
Jove grass.

Note the Survey of Alder Boundaries of this Township

West on random line between Secs 30 & 31

40.00 Set temporary 1/4 Sec. Corn



North, Range No. 31 East Hill, Nov. 13 1890

80.42	Intersect West boundary of Township 80 W South of the corner.		
89°26'	East on true line		
32.00	Wagon Road in corner corner	-	50
41.42	Deposit Basalt Stone 5 x 3 marked with a cross (+) and raised mound of earth with pits &c as per instructions for 1/4 Sec. lev.	+	50
80.42	The corner. Line following loci $\frac{1}{4}$ sec. four grass.	+	50

North between Secs 29 + 30  
on 21° East

40.00	Deposit Basalt Stone 4 x 4 x 4 marked with a cross (+) and raised mound of earth with pits &c as per instructions for 1/4 Sec. lev.		
68.00	Spiny Water Crown corner N.	-	100
80.00	Deposit Basalt Stone 4 x 3 x 2 marked with a cross (+) and	+	125



31 131

Subdivisional lines of Township No. 5 North

raised mound of earth  
with pits &c as per instructions  
for line to Secs 19, 21, 29 & 31  
Drove Alder Stake 2 ft long  
2 in. Square in S. E. pit.  
Same rolling. Soil 1<sup>st</sup> rate  
good grass

East on random line between Secs 20 + 29

40 100 Set temporary 1/4 Sec. line

80. 40 Intersect of S line 219 W  
North of Corner

A 88° 26' West on true line

40. 20 Deposit Basalt Stone 4 x 3 x 3

marked with a cross (H) same  
raised mound of earth  
with pits &c as per instructions  
for 1/4 Sec. line.

80. 40 The corner

Same rolling Soil 1<sup>st</sup> rate  
good grass.

West on random line between Secs 19 + 31

40 100 Set temporary 1/4 Sec. line



Range N<sup>o</sup> 31 East. Willamette Meridian

80.38 Intersect West boundary of T<sup>2</sup><sub>24</sub>  
85 lb South of the corner.

S 89° 25' East on true line

2.00 Leave Spring Water Canon  
course S W.

35.00 Enter Spring Water Canon  
course South West.

40.38 Deposit Brass Stone 3x3x3  
marked with a cross (H) and  
mound of Earth  
with pits &c as per instructions  
for 1/4 Sec. corner.

45.00 Leave Spring Water Canon  
course North West.

80.38 The corner. + 130

Same rolling Soil 1/2<sup>nd</sup> rate  
Jove grass  
Oct 30<sup>th</sup> 1874

North between Secs 19 + 20.  
Dir. 19° 30' East

40.00 Drive Charred Stake and  
mound of Earth  
with pits &c as per instructions  
for 1/4 Sec. corner. + 50



133,

Subdivisional line of Township No. 5 North

80.00 Drove chanced Stake and  
 raised mound of Earth  
 with pits &c as per instructions  
 for line to Secs 17, 18, 19 + 20.

Drove Fir Stake 2ft long 2 in dia  
 in S. E. pit.

Same gently rolling.

Soil 1<sup>st</sup> rate, good grass

Cut on random line between Secs 17 + 20.

40.00 Set temporary 1/4 Sec. line

80.35 Intersect of 18 line 249 ft  
 North of corner.

N 88° 13' West on true line

40.17 Drove chanced Stake and  
 raised mound of Earth  
 with pits &c as per instructions  
 for 1/4 Sec. line.

80.35 The corner.

Same rolling Soil 1<sup>st</sup> rate  
 good grass.

West on random line between Secs 18 + 19.

40.00 Set temporary 1/4 Sec. line.



Range N<sup>o</sup> 31 East, Willamette, Meridian

80.43 Intersect West boundary of  
Township 100 Ws South of Cor  
S 89° 17' East on true line

40.43 Drove charred Stake and  
muscle mound of Earth  
with pits &c as per instructions  
for 14 Dec. Cor.

80.43 The corner, - 100  
Same pollinif Soil 1<sup>st</sup> pit  
good grass

North between Secs 17 + 18  
Bearing 21° East

40.00 Drove charred Stake and  
muscle mound of Earth  
with pits &c as per instructions  
for 14 Dec. Cor. + 100

80.00 Drove charred Stake and  
muscle mound of Earth  
with pits &c as per instructions  
for Cor to Secs 7, 8, 17 + 18  
Drove Miller Stake 2 ft long  
In S.E. pt  
Same pollinif, Soil 1<sup>st</sup> pit



135  
 Subdivisional lines of Township No.

East on run down line between Secs 8 & 17

40.00 Set temporary  $\frac{1}{4}$  Sec. corner

80.00 Intersect  $\frac{1}{4}$  Sec line 238 by path  
 of the corner.

$88^{\circ}18'$  West on true line.

40.00 Drive chance stake and  
 raised mound of earth with  
 pits &c as per instructions  
 for  $\frac{1}{4}$  Sec corner

80.00 The corner.

Line gently rolling

Soil fine red gravel

West on run down line between Secs 7 & 18,

40.00 Set temporary  $\frac{1}{4}$  Sec. corner

79.88 Intersect West boundary of  
 Township 131 N<sup>o</sup> South of line

$89^{\circ}04'$  East on true

39.88 Drive chance stake and  
 raised mound of earth  
 with pits &c as per instructions  
 for  $\frac{1}{4}$  Sec. corner

79.88 The corner.

Line gently rolling Soil fine red gravel



5 North Range N<sup>o</sup> 31 East, Will. Mer.

North between Secs 7 & 8

Bur 21° 30' East

40.00 Drove choned Stake and  
mound of Earth  
with pits &c as per instructions  
for 1/4 Sec. Corn + 50

80.00 Drove choned Stake and  
mound of Earth  
with pits &c as per instructions  
for Corn to Secs 5, 6, 7 & 8 - 60

Drove Willow Stake 2 ft long 2  
in Square in S.E. pit  
Same polling Soil and pits

East on random line between Secs 5 & 8

40.00 At temporary 1/4 Sec. Corn

80.00 Inspect N & S line 231 W  
North of corner

N 85° 21' West on true line

40.00 Drove choned Stake and mound  
mound of Earth with pits &c as per  
instructions for 1/4 Sec. Corn

80.00 The corner.  
Same polling Soil and pits



37  
 137  
 Subdivisional lines of Township No 5

West on random line between Secs 6 + 7

4000 Set temporary  $\frac{1}{4}$  Sec. Cor.

79.35 Intersect West boundary of  
 Township 163 N. of Cor.

$88^{\circ}50'$  East on true line

39.35 Drove chained stake and  
 raised mound of Earth  
 with pits &c as per instruc-  
 tions for  $\frac{1}{4}$  Sec. Cor. — 100

79.35 The corner. + 40  
 Land polling soil in pits.  
 four fms.

North on random line between Secs 5 + 6

Var  $21^{\circ}$  East

4000 Set temporary  $\frac{1}{4}$  Sec. Cor.

82.00 Intersect N. boundary of  
 Township 125 N. of Cor.

$80^{\circ}54'$  West on true line

9.00 Leave Juniper Canon corner Dr

42.00 Drove chained stake & raised  
 mound of Earth with pits  
 &c as per instructions for  $\frac{1}{4}$  Sec. Cor. + 300

82.00 The corner. + 50  
 Land poll. Soil in pits

Oct 31<sup>st</sup> 1874



South Range 31 East, Willamette Meridian

### General Description

The land in this Township is generally rolling.

The soil is of 1<sup>st</sup> rate quality and adapted to agriculture and grazing purposes.

The hills are covered with a heavy growth of bunch grass.

There are several Springs in Springwater Canon in the Southern part of the Township which produce abundance of water.

Juniper Canon in the North has water standing in several places.

---



## List of Names

A list of the names of the individuals employed to assist in running, measuring or marking the lines and corners described in the foregoing field notes of Township N<sup>o</sup> 5 North of the base line of Range N<sup>o</sup> 3 East of the Willamette Meridian, showing the respective capacities in which they act:

Reuben S. Moore	Chairman
Henry Meldrum	Chairman
Wm. H. Cooper	Assessor



We hereby certify that we assisted  
 Nicholas O. Walden, Deputy Surveyor,  
 in surveying the Subdivisional lines of  
 Township No. 5 North of the base line of  
 Range No. 31 East of the Willamette Mer-  
 idian in the capacities indicated by  
 our respective signatures, and that  
 said Township has been in, all respects  
 to the best of our knowledge and be-  
 lief well and faithfully surveyed  
 and the boundary monuments plant-  
 ed according to the instructions fur-  
 nished by the Surveyor General.

Rufus S. Moore Chairman


Henry Melnum Chairman

William H. Cooper Assessor

Subscribed and sworn to before me

a Notary Public this 12<sup>th</sup> day of Decr 1894

John W. Melnum  
 Notary Public

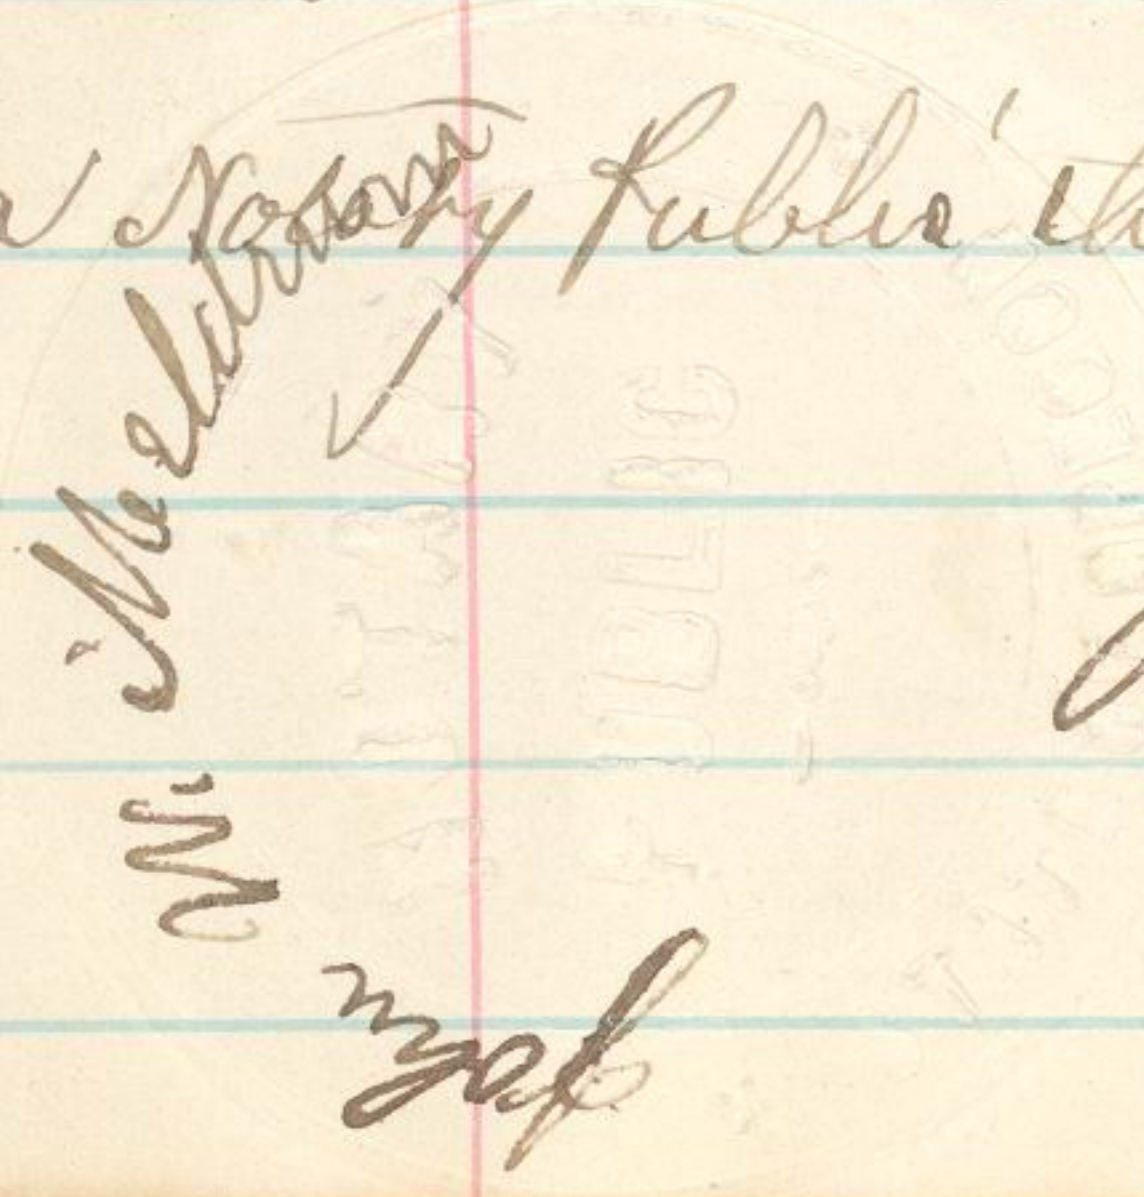

W. Melnum  
 Notary



I Nicholas O. Walden Deputy Surveyor do solemnly swear that in pursuance of a contract with Benjamin Simpson U. S. Surveyor General for the State of Oregon bearing date the 6<sup>th</sup> day of July 1874, and in strict conformity to the laws of the United States and the instructions furnished by the said Surveyor General I have faithfully surveyed the subdivisional lines of Township N<sup>o</sup> 5 North of the Base line of Range N<sup>o</sup> 31 East of the Willamette Meridian in the State aforesaid and do further solemnly swear that the foregoing are the true and original field notes of such survey.

Nicholas O. Walden  
Deputy Surveyor

Subscribed and sworn to by the above named  
Nicholas O. Walden, Deputy Surveyor before me  
a Notary Public on this the 12<sup>th</sup> day of Dec-  
ember 1874

John W. Waldman  
Notary Public

Nicholas O. Walden  
Deputy Surveyor



U.S. Surveyor General's Office  
Portland Oregon July 23 1875

The foregoing field notes of the survey of the subdivisional  
lines of S. N. R. 31 E. Will Mer Oregon executed by  
Nicholas Walden D.S. under his contract No 209  
bearing date July 6th 1874 having been critically  
examined the necessary corrections and explanations  
made the said field notes and the surveys they  
describe are hereby approved

Ben Simpson  
Sur Gen<sup>l</sup> of Oregon