

Bk 117


See Page 74 - Line between 13824 not
within limit with the line bet 24825 ⁴⁷⁰
See Page 102. No Variation given at the
corner Osces 5, 6, 7 & 8

Transcript for Washington, made
July 29th, 1873,
W. B. W.

A. H. Simmons having been
Employed by George William Deputy
Surveyor as compassman do solemnly
swear that I will well and faithfully
and to the best of my skill and ability
execute the duties as compassman
according to the Laws of the United
States and the instructions furnished
by the Surveyor General of Oregon

Subscribed and sworn
to before me this 13th
day of May A.D. 1873
C. Moore
Notary Public

A H Simmons

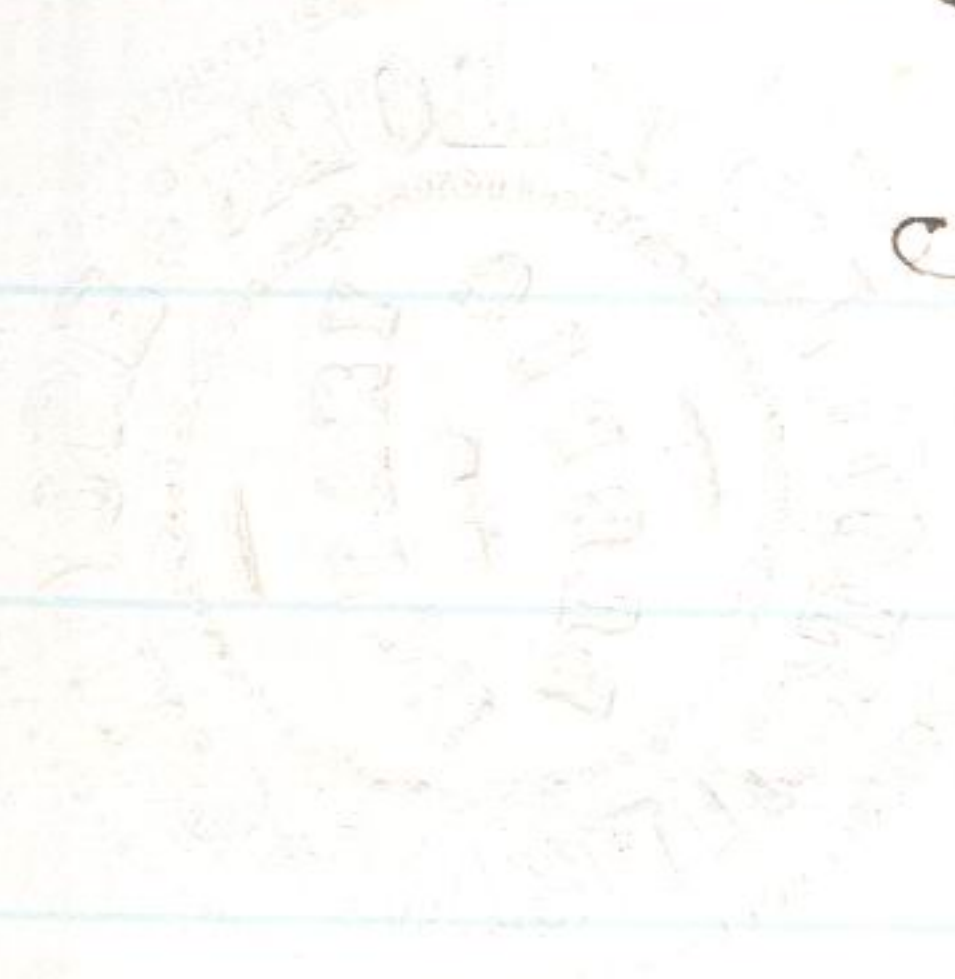

2
P. 472
Blank

473

no

I, Erchas H. Love, and Benjamin
Baxter do solemnly swear
that I will faithfully execute
the duties of Chain Carrier
that I will level the chain
on uneven ground and plumb
the tall pins ^{no} either by dropping
or sticking, the same that
I will report the true distance
on line to all notable objects
and the true length of all
lines measured by me to
the best of my skill and ability

E. H. Love,

B. Baxter

Sworn and subscribed to before
me this 27th Sept 1853

J. P. Deary
Notary Public

Field notes To complete
the exterior lines of Township
5 & 6 N. R. 37 & 38 East of
the Wadumette Meridian by
Grover Williams Dep. Sur.
under his Contract No.

Dated 1872

Assisted by E. M. Love and
B. Bayter Chumman
Andrew Jasper Teagarden
and R. Hays Aronson
and A. H. Linnins Comptroller
Work commenced September
29th 1872

Township 6 N. R. 37 E. Will. Mer.

Begin at the established corner
for Sec 19, 24, 25 & 30 on the
Range line between Ranges
37 & 38 E Township 6 N. Witness
trees standing and agree with
description furnish me by

Between R. 37 & 38 E S 5 W Well. Mex.

From the established Cor. for Secs
25, 30, 31 & 36 on the Range line
between Ranges 37 & 38 E S. 5 W which
Cor. I find to agree with the Field
Notes furnished me by the office
A run north or there between Secs.

25 & 30. Var. $20\frac{3}{4}^{\circ}$ E

Along side hill face N.

^{12.}
12.00 Descend steep hill

^{40.}
40.00 Set post for $\frac{1}{4}$ Sec. Cor. from which
a Fir 10 in dia. bears N. 10° W 20 lbs dist

" " 15 " " " W 28° E 72 " "

^{51.}
51.00 North Fork of the Waller Waller falls
N 70° W 23 lbs wide

^{53.00}
53.00 Leave bottom ascend

^{80.00}
80.00 Set post on steep hill side for Cor to
Secs. 24, 25, 19, & 30 from which
a Lamuruck 9 in dia bears N 22° E 15 lbs dist

" Fir 12 " " " W 31° N 74 " "

" Spruce 8 " " " S 27° E 91 " "

" Fir 12 " " " S 38° N 42 " "

Land mountainous. Rocky Timber

489

Range

Between 37838 E S C N Hill Mer.

Fir Lammack Pine & Spruce
Undergrowth the same

North on Range line between 37838 E
between Secs 24 & 19.

Var. 22° E Ascend

21.00 A Ridge 250 ft. Falls S. H.

40.00 Set post for 1/4 Sec. Cor. from which
a Fir 10 in. dia. bears N 76° E 37 lks dist
a Fir 14 in dia bears S 37° W 81 " "

76.00 Summit of Ridge 1000 ft. Falls H descend

80.00 Set post for Cor to Secs ^{13, 18, 19, 24, 18, 19} 13, 18, 19, 30,
a Fir 17 in. dia. bears N 20° E 72 lks dist
a " 6 " " " N 34° W 37 " "
" " 21 " " " S 70° W 96 " "
" Pine 18 " " " S 41° E 150 " "

Land rough, mountains, Rocky
Lumber Pine, Spruce, Lammack,

North ^{Range} on line between 37838 E
between Secs 13 & 18

Var. 21° E

Between Range 37N 38E S 5W Will. Mex

8.00	Foot of hill 700ft. a creek 2 lks wide flows S.W.
8.50	Ascend
36.00	Enter burnt woods
40.00	Set stone 12x9x7x in mound of earth with pits from which
80.00	A Fir 10 in. dia, bears S. 20° W. 3 lks dist
	Set post for Cor to Secs. 7, 12, 13 & 18,
	A Red Fir 8 in. dia, bears N 55° E 28 lks dist
	" " " 7 " " " S 50° E 41 " "
	" " " 4 " " " S 70° W 10 " "
	" White " 6 " " " N 28° W 28 " "
	Land hills. Lumber Fir, Pine & Spruce

Northwestern Secs 7 & 12.

Par. 20° E

25.50	25 Road S & W
40.00	Set post for 1/4 Sec. Cor from which
	A Spruce 20 in. dia bears S 44° W 7 lks dist
46.95	" Fir 10 " " " N 20° E 30 " "
46.95	Road S & W
51.40	Enter Wet Parrain Swamp

421

North between Range 37 & 38 E T 5 N Hill, Nev.

- 54,48 Creek ^{lks} 8, wide falls S H
- 55,30 Road S W. & N E
- 56,20 Enter Limber
- 74,50 Enter Parrain
- 80,00 Set post in edge of Parrain Cor. for
 Secs. 1, 6, 7, & 12 from which
 a white fir 8 in. dia. bears S 78° W. 52 lks
 " " " 6 " " " N 35° W. 40 " "
- no other trees convenient
 Limber Pine Fir Spruce & Gambuck.
 Land rolling to Parrain which is wet
 requires draining for agriculture
 Soil 1st Rate Black loam

North between Secs 1 & 6 on a true line
 2 or 18° E

- 40,00 Set post for temporary 1/4 Sec. Cor.
- 80,70 Intersect true line, north boundary
 of Town 170 lks N. of Cor. for Towns
 5 & 6 N.R. 37 & 38 E from which Cor.
 X Run South 1° 13' N on a true line
- 6,70 Top of hill

North between Range 377 38 E S. 1. N Hill Top

40,00 Set post for $\frac{1}{4}$ Secs Cor from which
 A white Fir 12, in dia bears S. 50° E 21 kts
 " " " " 6 " " " N 80° W 71 " Dist

72,20 Leave timber & Enter wet Prairie

80,70 ^{80.70} Intersect the Cor. for Secs 1, 6, 7 & 12

Said Rolling 2nd Rate, Timber
 Pine Fir Lammac & Spruce

The line between Secs. 31 & 36
 having been run a random line
 from the Cor of 1, 6, 7, & 12

Oct. 4th 1872

General Description

This Township is very mountainous cut
 by deep canyons in every course. The
 western portions reaches the foot hills along
 which are a number of settlers. The Eastern
 portion small timber not large enough for
 saw logs, consisting of Pine, Fir, Spruce
 Lammac Willow Vine Maple & Gum

Completed Oct. 4th 1872

I George William Deputy Surveyor do solemnly swear that in pursuance of a contract with W. H. Odell Surveyor General of the public lands of the United States in the State of Oregon bearing date the 20th day of July 1872 and in strict conformity to the Laws of the United States and the instructions furnished by the said Surveyor General, I have faithfully surveyed the Exterior and Subdivisional lines of Township 5 North Range 37 East, the Exterior and Subdivisional lines of Fractional Townships 6 North Ranges 37 & 38 East and the Subdivisional lines of Fractional Township 5 North Range 38 East ^{in the State of} Oregon aforesaid and do further solemnly swear that the foregoing are the true and original field notes of such survey.

George William
Deputy Surveyor

Subscribed & sworn to
before me this 6th day
of May A. D. 1873

W. H. Odell
Surveyor General

584

585

List of Persons Employed to
assist in running measuring or
marking the lines and corners described
in the foregoing field notes showing
the respective capacities in which
they acted

E H Love & B Baxter Chairman
Richard Hays Assessor
Andrew Jasper Flagman
A H Simmons Comptroller

We hereby certify that we have appointed
Geo Williams, deputy surveyor, in
surveying the exterior boundaries and in subdividing
Townships Number 5 & 6 N R 37 & 38 N, R 28 & 29 and
four sections in Township 5 N 38 E, of the Willamette
Meridian Territory of Oregon and that said
Townships have been in all respects, to the
best of our knowledge and belief well
and faithfully surveyed and the boundary
monuments planted according to the instructions
furnished by the Surveyor General,

E H Love, Chairman

B Baxter ..

R Hays Assessor

Andrew Jasper Flagman

A H Simmons Comptroller

Given and subscribed to before me
on this 24th day Dec 1872

O P Lacey
Notary Public

We the undersigned Bondsmen in the contract No. 176 made between George Williams Deputy Surveyor and the Surveyor General of the United States for the State of Oregon bearing date the 20th day of July 1873 hereby consent to the substitution of fractional Township 5. & 6. North Range 38 East. Surveyed instead of Township 4 North Range 37 East left unsurveyed by reason of unfitness; And we hold ourselves in every respect liable under said Contract with said Substitution as under the original Contract
G. Williams

Mr S. C. Adams the other Bondsmen on the above mentioned contract is out of the State, he being in Cincinnati Ohio and will not return the present year.

L. H. Williams
Dep. Sur.

Salem, May 7th 1873.