

Index.

To N. 12.37 E.

To N. R. 37 E.

		65	64	
13	24	25	31 1/2	63
		See	35	62
		34	39	61
		33	39	61
		32	32	60
		31	31	59

Copy all

(Run index around)

(Run index around)

5 N - 37 E Sec 6

67

Commenced the survey
of the Extension lines
of Township No 6 North of
Base line of Range 37 East
of Willamette Meridian
May 26th 1865,

East on south boundary
of section 31 T6 N, R37 E,
var 21° East

1900 Ploughed Land
2500 Leave Ploughed Land
4000 Set $\frac{1}{4}$ Section ~~stone~~ corner
Stone 16x12x4. Basalt
8000 Set a post corner for section
31 & 32, 5 & 6, on hill side facing
the West deposited marked
stone, dug pits, and
prised ground as per
instructions,
Land broken, good grass,
Soil ~~at~~ rate,

Township 6 N, Range 37 East 11th Mer,
East on south boundary
of section 32 Township 6 N
Range 37 East,

Bar 21° East,

1500 Road Course N, W, 60

40,00 Set 4 section post, on
west side of Ravine course N, E, 40
Drove charred stake,
dug pits and raised
mound as per instructions

76,38 A Fir Bindia, bears N, 20 W, 150

76,68 A Creek 10 M wide course N, W, 10

8000 Set a post corner for 25

sections 32 & 33, 4 & 5, on side
hill facing the west, Drove
Charred stake, dug pits and
raised mound as per instructions,

Land broken good
grass, Soil 2nd rate

Township 6^N Range 37 East, Will, Mex,
East on South boundary
of section 33 T, 6 N, R, 37 East,
Variation 21° East,

40,00 Set 4 section post, on ⁺ 125
side hill facing the South,
Made corner of Basalt Stone
14 x 12 x 4,

48,25 Two Fir trees, bears 3 about 500
the only trees in the ravine

80,00 Set post corner for Secs
33 & 34. 344, on steep hill side
facing the S, W, made mound of
stone as per instructions
Land broken good
Grass, Soil good, 2nd rate

East on south boundary
of section 34. Township 6^N
Range 37 East,
Variation 21° E

2860 Spring branch 2 1/2 mile course
N. W.

Township 6 d, Range 37 East Mt, Mer,
 4000 Set 1/4 section post, on steep
 hill side, facing the West,
 8000 Set stone 14x11x8 Basalt, 80
 corner for sections 34 & 35-
 2 & 3. on steep hill side facing the
 East.

This line passes over
 spurs of Mountains coursing to
 the N. E. very broken some
 scattering timber in the Ravines

East between sections
 27 & 35 Townships 5 & 6 N, R. 27 E,
 Near 21° East,

1238 Creek 10ths wide course NW 75
 40.00 Set a post - corner for 1/4
 section, in small grove of
 timber on Mountain side
 facing the N. from which 500
 a Willow 5 in, dia, bears S 24° W
 a Fir 10 " " " N 84° E, 31 lbs
 48.25 Enter timber +
 100

Township 60 N, Range 37 East, Will, Mer,
8000 set a post corner for sections

1, 2, 3 & 36, from which

A Larch 18 in dia, bears $N 49^{\circ} W$, 8 ths

A " 18 " " " $S 53^{\circ} W$, 32 "

A " 20 " " " $S 12^{\circ} E$, 30 "

A " 20 " " " $N 54^{\circ} E$, 34 "

This line passes up steep
mountain side

Timber excellent Fir &
Larch Undergrowth same and
Green Willow and Maple,

East to South boundary of
section 36 T 6 N, Range 37 East

Deviation 21° East,

4000 Set 4 Section post corner

from which

A Fir 20 in dia, bears $S 54^{\circ} 30' E$ 20 ths

A Willow 5 " " " $N 19^{\circ} W$, 30 "

8000 Set a post corner for ~~at~~

Townships 54 & 6 N, Ranges 37 & 38 E,

Township N. Range 37 East W. Mer,
from which

- A Fir 20 in dia, bears N, 7° W, 23 lbs
- A " 20 " " " N, 18° E, 22 "
- A " 20 " " " S, 40° E, 18 "
- A " 10 " " " S, 23° W, 24 "

This line passes through
 excellent timber, Land
 gently rolling soil good
 timber Fir Larch & Pine
 Under growth some and
 maple & gum,

North on East boundary
 of sections 36, 6 N, W, 37 East,
 Variation 21° East,

4000 Made corner for section 100
 on Gum tree 2 inches
 which a Fir 20 in bears S 41° E 12 lbs
 a Gum 8 " " S, 38° W, 25 "

8000 Set a post corner for sections
 25. 36. 31 & 30 on side of Butte


502

We hereby certify that
 we assisted William H.
 Odell and William S.
 Lewis, deputy surveyors,
 in surveying and marking
 the following lines, to wit;
 The 1st Standard Paralled North
 between Townships 4 & 5 and
 East through Ranges 31. 32,
 33. 34. 35. & 37. East of Will. Mer,
 also the subdivisioral lines
 of Townships 5 N. Ranges 33. 35 & 36,
 do, 6 N, do, 34. 35 & 36 do,
 do 4 do, do, 32 & 33 do,
 and the Extremors of Townships
 5 N Range 35. 36,
 6 do, do, 34. 35. 36 & 37 East
 4 do do 31. 33. & 35 do,
 and that said lines
 have been in all respects

To the best of our knowledge
and belief, well and
faithfully surveyed, and
the boundary monuments
planted according to the
instructions furnished by
the Surveyor General.

Cyrus Dion Chairman
Robert Beck Assessor

State of Oregon }
County of Benton } 1865 Subscribed
and sworn to before me
this 17 day of June 1865
Leoberec
Notary Public

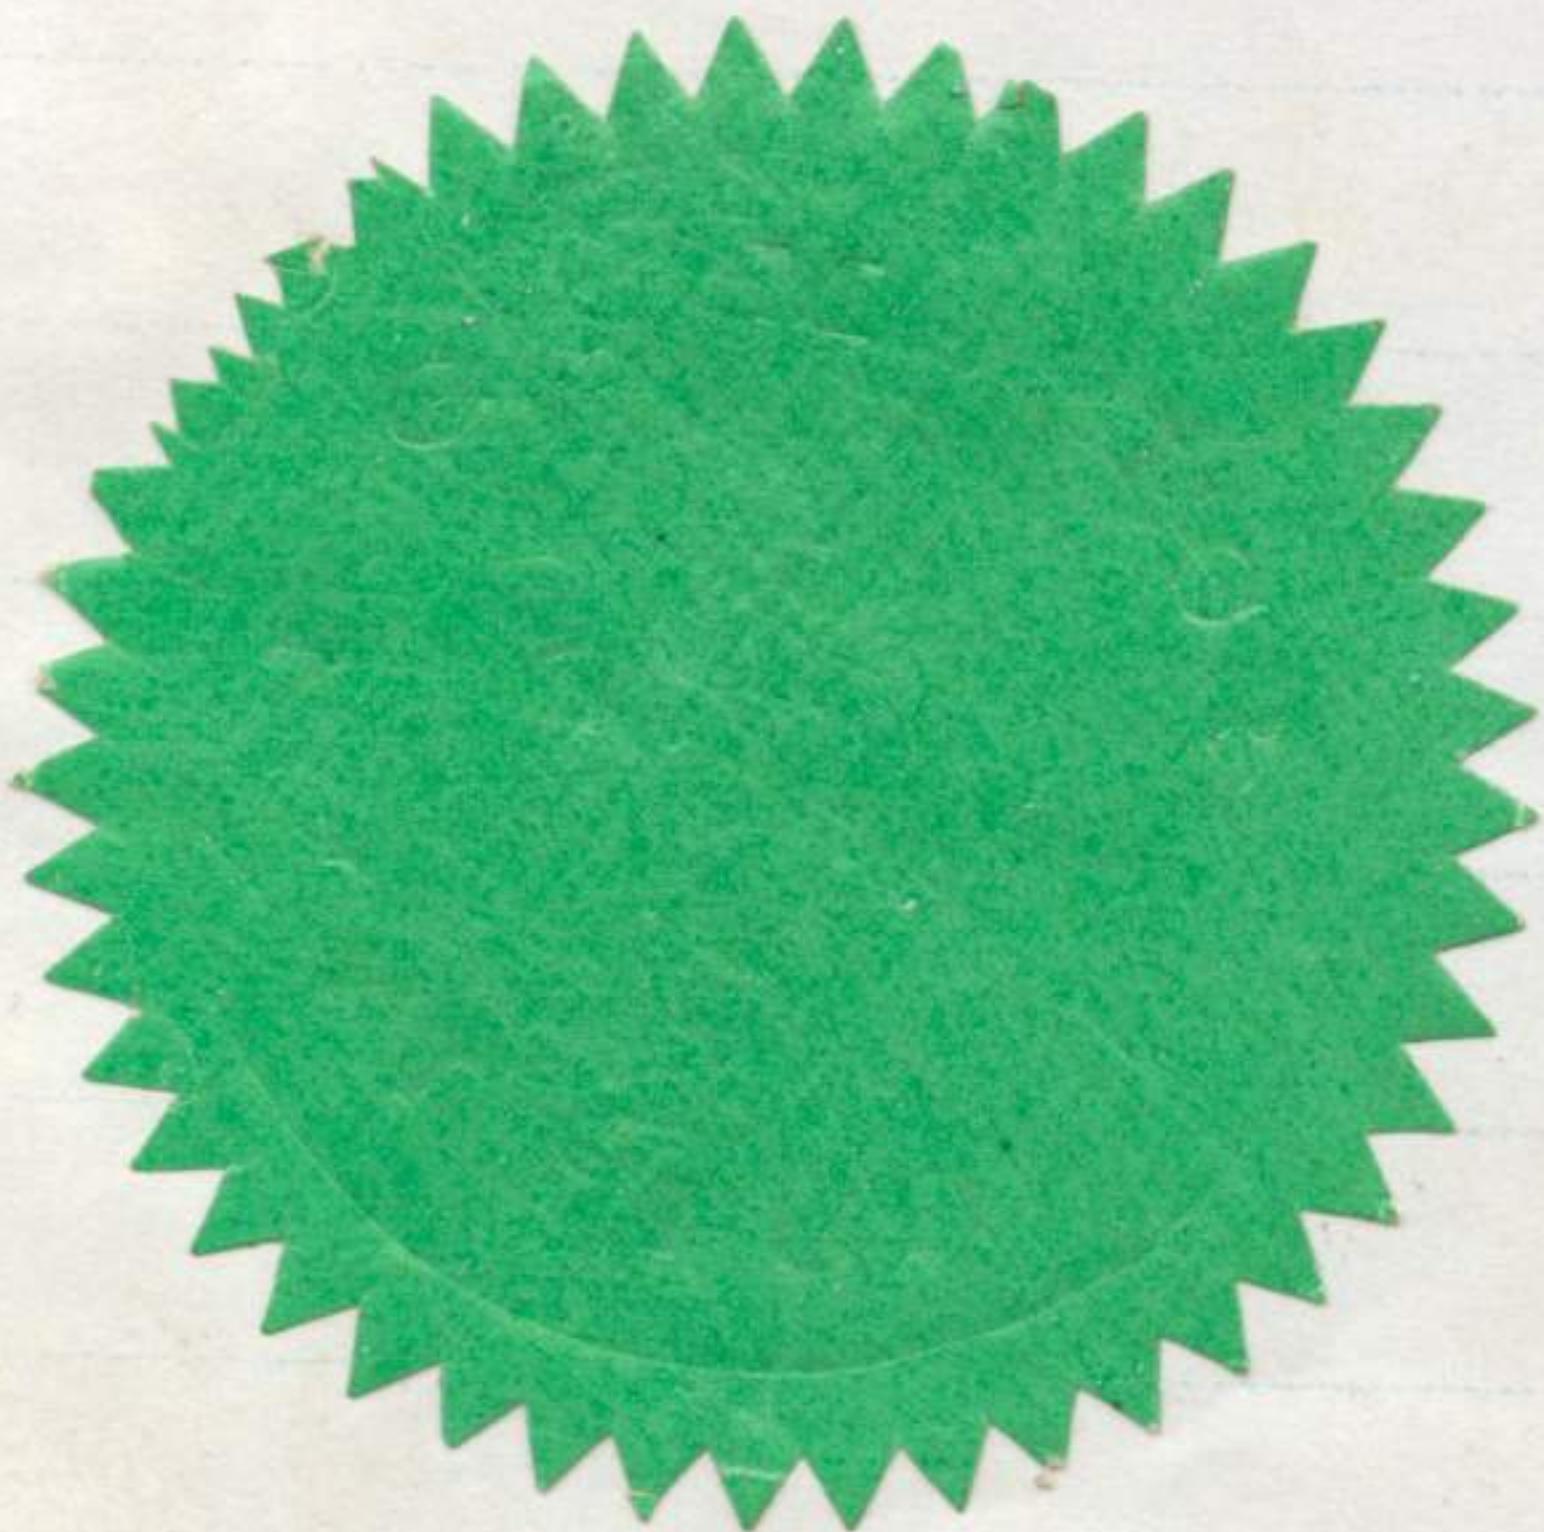

506

602

P.
666-601
Blank



I hereby certify that I assisted
William H. Odell and William S.

Lewis deputy surveyor, in surveying
the following lines, to wit;

The ~~1st~~ Standard Parallel North
between Townships 4 & 5 North and

East through Ranges 31. 32. 33. 34.

35. & 37. East of Willamette Meridian

also the subdivisional lines

of Townships Nos 5 North Ranges 33. 35. & 36 E,

do, do, 6 do, do, 34. 35. & 36 do,

do, do, 4 do, do, 32 & 33 do,

and the Exterior of Townships

Nos 5 North Range 35 & 36, 37 East

do, 6 do, do, 34. 35. 36 & 37, do,

do, 4 do, do, 31. 33. & 35, do,

and that said lines have
been in all respects

to the best of my knowledge and
belief, well and faithfully surveyed,
and the boundary monuments
planted according to the instructions
furnished by the Surveyor General,
D. C. Wallace Chairman

State of Oregon)
County of Lane) ss.

Sworn & subscribed before me this
24th day of June 1865

Joel Mann

Notary Public

