

Bk 117


See Page 74 - Line between 13824 not  
within limit with the line bet 24825 <sup>470</sup>  
See Page 102. No Variation given at the  
corner Osces 5, 6, 7 & 8

Transcript for Washington, made  
July 29<sup>th</sup>, 1873,  
W. B. W.

A. H. Simmons having been  
Employed by George William Deputy  
Surveyor as compassman do solemnly  
swear that I will well and faithfully  
and to the best of my skill and ability  
execute the duties as compassman  
according to the Laws of the United  
States and the instructions furnished  
by the Surveyor General of Oregon

Subscribed and sworn  
to before me this 13<sup>th</sup>  
day of May A.D. 1873  
C. Moore  
Notary Public

A H Simmons

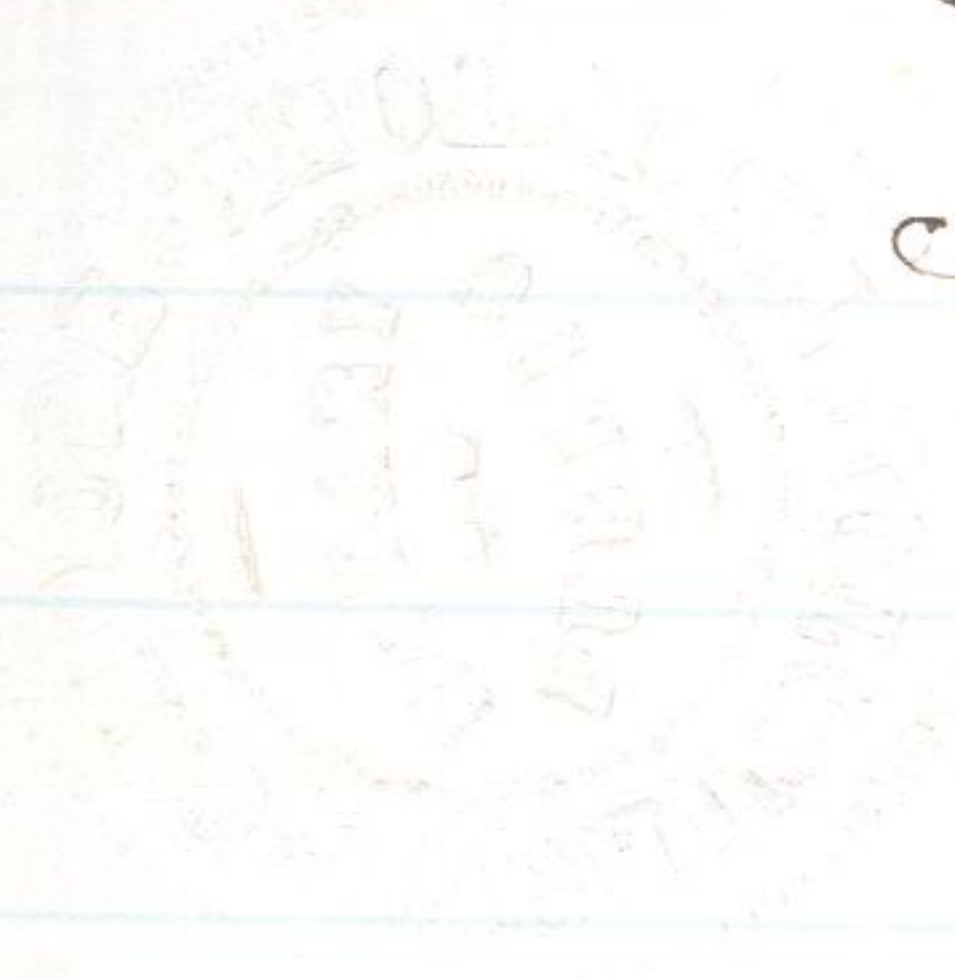

2  
P. 472  
blank

473

no

I, Erchas H. Love, and Benjamin  
Baxter do solemnly swear  
that I will faithfully execute  
the duties of Chain Carrier  
that I will level the chain  
on uneven ground and plumb  
the tall pins <sup>no</sup> either by dropping  
or sticking, the same that  
I will report the true distance  
on line to all notable objects  
and the true length of all  
lines measured by me to  
the best of my skill and ability

E. H. Love,

B. Baxter

Sworn and subscribed to before  
me this 27<sup>th</sup> Sept 1873

J. P. Deary  
Notary Public

Field notes To complete  
the exterior lines of Township  
5 & 6 N. R. 37 & 38 East of  
the Wadumette Meridian by  
Grover Williams Dep. Surv.  
under his Contract No.

Dated 1872

Assisted by E. H. Love and  
B. Bayter Chainmen  
Andrew Jasper Chainman  
and R. Hays Chainman  
and A. H. Linnings Chainman  
Work commenced September  
29<sup>th</sup> 1872

Township 6 N. R. 37 E. Will. Mer.

Begin at the established corner  
for Sec 19, 24, 25 & 30 on the  
Range line between Ranges  
37 & 38 E Township 6 N. Witness  
trees standing and agree with  
description furnish me by

Between 37<sup>th</sup> & 38, E. T. C. N.R. Hill, Mer.

North between Secs 13 & 14.

Var. 22° 3

10.30 Enter timber

16.30 Ridge - 150 ft. Falls East

23.80 Bottom of Gulch 300 ft. Falls <sup>East</sup> ascend

24.00 Leave timber

34.00 Enter timber

40.00 Set post for 1/4 Sec. Cor. from which a Fir tree 6. in. dia. bears N. 15° W. 21 lks dist. no other convenient on side hill face East

51.60 Intersect State line at a point 15.30 N. of the 41. mile post I set post for Closing Cor. from which a Lamurack 10. in. dia. S. 70° E 2 lks distant a Fir 8. in. dia. bears S. 50° W 40 lks distant

Land mountainous

Timber Fir Lamurack & Pine

Sept. 29<sup>th</sup> 1872

## T. C. N. R. 37 &amp; Hill. Mer.

40.00	Set post for $\frac{1}{4}$ Sec. Cor. from which a Red Fir 12 in dia bears N $80^{\circ}$ E 64 lks dist " " " 16 " " " N $65^{\circ}$ W 52 " "
50.20	Limber Road E & W
76.00	leave timber
80.00	Set post in tunnel with pits for Cor to Secs. 13, 14, 23 & 24 Sand Hermitimus Limber Pine Fir & Lianas
East on a Random line between Secs. 13 & 24	
40.00	Set post for temporary $\frac{1}{4}$ Sec. Cor.
79.70	Intersect the Cor for Secs 13, 18, 19 & 24 45 lks S; from which I run South $89^{\circ} 41'$ W. on tra line between Secs 13 & 24
39.85	Set post for $\frac{1}{4}$ Sec. Cor. from which a Fir 6 in dia bears N $14^{\circ}$ E 20 lks dist " " 12 " " " S $20^{\circ}$ W 8 " "
67.56 79.70	leave timber ascend to corner
North between Secs 13 & 14 Var $20.15'$ E	
32.00	Flat Ridge
40.00	Set post for $\frac{1}{4}$ Sec Cor from which

T. C. W. R. 37 E Hill, Tex.

A White fir 10 in dia bears N 80° E 14 lks dist

" Red " 9 " " " " N 65 E 16 " "

51.80

Intersect N boundary of State line

15.97 chs. N. of the 40 mill post set

post for closing Cor for fractional Secs

13 & 14 from which

A Pine 10 in dia bears N 15° E 71 lks dist

" " 5 " " " " S 6° N 23 " "

Land more level Soil good heavy undergrowth

Oct. 18<sup>th</sup> 1872

North between Secs 34 & 35

Bear 21° 35' E

Ascend steep Rocky Hill

11.00 Cross N Fork of Cottonwood & ascend

40.00 set Stone 18x15x10 mound of Rock for <sup>Cor</sup> 1/4 Sec

51.50 A Spr 50 lks East of line

80.00 set post for Cor to Secs 26, 27, 34 & 35

A pine 24 in dia bears N 30° E 220 lks dist

" " 18 " " " " S 15° E 97 " "

Land mountainous Good Grass Lumber Pine & Fir

528

T. L. & R. 37. E Well, Meridian

North between Secs 14 & 15,

Var.  $21^{\circ} E$

37.00 Ascend Summit of Ridge 500 ft

40.00 Set Stake mound & pits for  $\frac{1}{4}$  Sec, Cor,

51.75 Enter sec n. boundary of State 16, 15 chs

N. of 3<sup>rd</sup> mile post, set Rock 6x7x18

for the cor. of fractional Secs 14 & 15

Land Montanans Good Buckley & Sons

Lumber Pine & Fir } Oct 21<sup>st</sup> 1872

North between Secs 33 & 34

Var  $21\frac{3}{4}^{\circ} E$

6.50 Cross Ridge & descend steep hill

40.00 Set post & rock in mound of Rock for  $\frac{1}{4}$  Sec Cor

51.50 Round E & W. Ascend

72.00 Cross ridge

80.00 Set post & Stone mound & pits for the

Corner of Secs 27, 28, 33 & 34

Land Montanans Bunch Good

East on a section line between Secs 27 & 34

40.00 Set post for temporary  $\frac{1}{4}$  Sec, Cor,



55  
 T.C. N.R. 37 E Hill. Meridian

North between Secs 20 & 21

Cor 2 1/2 E

21.50 Cross road valley to timber

24.00 Cross ridge & descend

40.00 Set Stone 10x12x14 for 1/4 Sec. Cor.

51.80 Deep Canion Cr. 10 lks wide flows & ascend

55.30 Grade Road East

80.00 Set Stone 6x8x13 mound & pits for  
 Cor to Secs 16, 17, 20 & 21

Land Mountainous Small timber or Crs.

East on same line between Secs 16 & 21

40.00 Set Stone for temporary 1/4 Sec. Cor.

79.50 Intersect N & S line 49 lks N. of Cor. for  
 Secs 15, 16, 21 & 22 from which Cor & run  
 N 89° 39' W on true line between Secs 16 & 21

79.78 Set Stone 2x6x15 mound of Stone for 1/4 Sec. Cor.

56.41 Cross dry gulch

65.00 Cross ridge

79.50 The Cor for Secs 16, 17, 20 & 21

Land Hilly no timber Good Grass

## T. C. R 37 E Will. Juridians

North between Secs 16 &amp; 17

Var  $2\frac{1}{2}^{\circ}$  E

- 11.50 Summit of Ridge descend  
 13.00 Cross rail fence E to W  
 40.00 Set stone  $15 \times 17 \times 20$  mound & pits for  $\frac{1}{4}$  S.E.  
 52.50 Enter sec N boundary State 16.0 s. cho  
 West of 37 mile post. set stone  
 $12 \times 14 \times 18$  for cor to fractional Secs 16 & 17  
 Sand hilly no timber Good grass  
 Oct 23<sup>rd</sup> 1872

North between Secs 31 &amp; 32

Var  $2\frac{1}{2}^{\circ}$  E

- 10.00 Road to timber  
 30.60 Cross fence of Duer's field  
 40.00 set post mound & pits for  $\frac{1}{4}$  Sec Cor.  
 46.00 In Duer's Drummy 50 lbs W.  
 62.75 Cross fence and live field  
 80.00 set post mound & pits for Cor to Secs  
 29, 30, 31 & 32.

Soil Good no timber Good grass

5.10

Y C R R 37. E Hill Mound

West on random line between Secs 18 & 19

40.00  
40.00  
79.50  
79.50

Set post for temporary 1/4 Sec Cor.  
Intersect Turn, line at the Cor. for Sec  
13, 18, 19 & 24 from this Cor. Run E on a  
true line between Secs 18 & 19

5.25  
5.25  
12.30  
12.30  
16.00  
16.00  
20.25  
20.25  
39.50  
39.50

Cross fence mound  
Cross Cr 20 lks with run W  
Cross Cr 2 lks with run W  
Cross fence

45.00  
45.00  
60.00  
60.00  
61.50  
61.50  
74.35  
74.35  
77.50  
77.50  
79.50  
79.50

Set Stone 6x8x14 mound & pits for 1/4 Sec. Cor.  
In Marchant's house bears S 4 lks distant  
Cross fence enter field  
Cross fence leave field  
Digging ditch  
Cr. 2 lks wide  
The Cor for Secs 17, 18, 19 & 26.  
Soil 1/2 rate ?? Oct 24<sup>th</sup> 1872

North between Secs 17 & 18

.60  
60  
3.30  
3.30

Jan 20<sup>th</sup> E  
Cliff 12 ft mound enter bottom  
Cr. flows W 15 lks wide

511

10.00 Enter June  
 40.00 Set Stone 6x12x18 for 1/4 Sec Cor  
 52.20 Pulverize N boundary of State 16 88 chs  
 W 36 mile post, set Stone 6x8x13 fo  
 cor to fractional Secs 17 & 18  
 Sand rolling 1<sup>st</sup> rate

### General Description

This Township is much cut with deep  
 canyons which bear N & SE The soil  
 on the ridges is generally good  
 Eastern portion is high up on the  
 Blue Mountains. The Western is more  
 level being nearer the foot of the  
 mountain. The ravines are not so <sup>deep</sup> ~~deep~~  
<sup>and</sup> heavy, excellent soil, is being rapidly  
 settled. The timber consists of Fir  
 Larch Pine Spruce Birch Alder  
 Cottonwood & willow in the  
 western portion of township  
 Completed Oct 25 1872

I George William Deputy Surveyor do solemnly swear that in pursuance of a contract with W. H. Odell Surveyor General of the public lands of the United States in the State of Oregon bearing date the 20<sup>th</sup> day of July 1872 and in strict conformity to the Laws of the United States and the instructions furnished by the said Surveyor General, I have faithfully surveyed the Exterior and Subdivisional lines of Township 5 North Range 37 East, the Exterior and Subdivisional lines of Fractional Townships 6 North Ranges 37 & 38 East and the Subdivisional lines of Fractional Township 5 North Range 38 East <sup>in the State of</sup> Oregon aforesaid and do further solemnly swear that the foregoing are the true and original field notes of such survey.

George William  
Deputy Surveyor

Subscribed & sworn to  
before me this 6<sup>th</sup> day  
of May A. D. 1873

W. H. Odell  
Surveyor General

584

585

List of Persons Employed to  
assist in running measuring or  
marking the lines and corners described  
in the foregoing field notes showing  
the respective capacities in which  
they acted

E H Love, & B Baxter Chairman  
Richard Hays Assessor  
Andrew Jasper Flagman  
A H Simmons Comptroller

We hereby certify that we have appointed  
Geo Williams, deputy surveyor, in  
surveying the exterior boundaries and in subdividing  
Townships Number 5 & 6 N R 37 & 38 E and  
four sections in Township 5 N 38 E, of the Willamette  
Meridian Territory of Oregon and that said  
Townships have been in all respects, to the  
best of our knowledge and belief well  
and faithfully surveyed and the boundary  
monuments planted according to the instructions  
furnished by the Surveyor General,

E H Love, Chairman

B Baxter ..

R Hays Assessor

Andrew Jasper Flagman

A H Simmons Comptroller

Given and subscribed to before me  
on this 24<sup>th</sup> day Dec 1872

O P Lacey  
Notary Public

We the undersigned Bondsmen in the contract No. 176 made between George Williams Deputy Surveyor and the Surveyor General of the United States for the State of Oregon bearing date the 20<sup>th</sup> day of July 1873 hereby consent to the substitution of fractional Township 5. & 6. North Range 38 East. Surveyed instead of Township 4 North Range 37 East left unsurveyed by reason of unfitness; And we hold ourselves in every respect liable under said Contract with said Substitution as under the original Contract  
G. Williams

Mr S. C. Adams the other Bondsmen on the above mentioned contract is out of the State, he being in Cincinnati Ohio and will not return the present year.

L. H. Williams  
Dep. Sur.

Salem, May 7<sup>th</sup> 1873.