

Bk 117


See Page 74 - Line between 13824 not
within limit with the line bet 24825 ⁴⁷⁰
See Page 102. No Variation given at the
corner Osces 5, 6, 7 & 8

Transcript for Washington, made
July 29th, 1873,
W. B. W.

A. H. Simmons having been
Employed by George William Deputy
Surveyors as compassman do solemnly
swear that I will well and faithfully
and to the best of my skill and ability
execute the duties as compassman
according to the Laws of the United
States and the instructions furnished
by the Surveyor General of Oregon

Subscribed and sworn
to before me this 13th
day of May A.D. 1873
C. Moore
Notary Public

A. H. Simmons

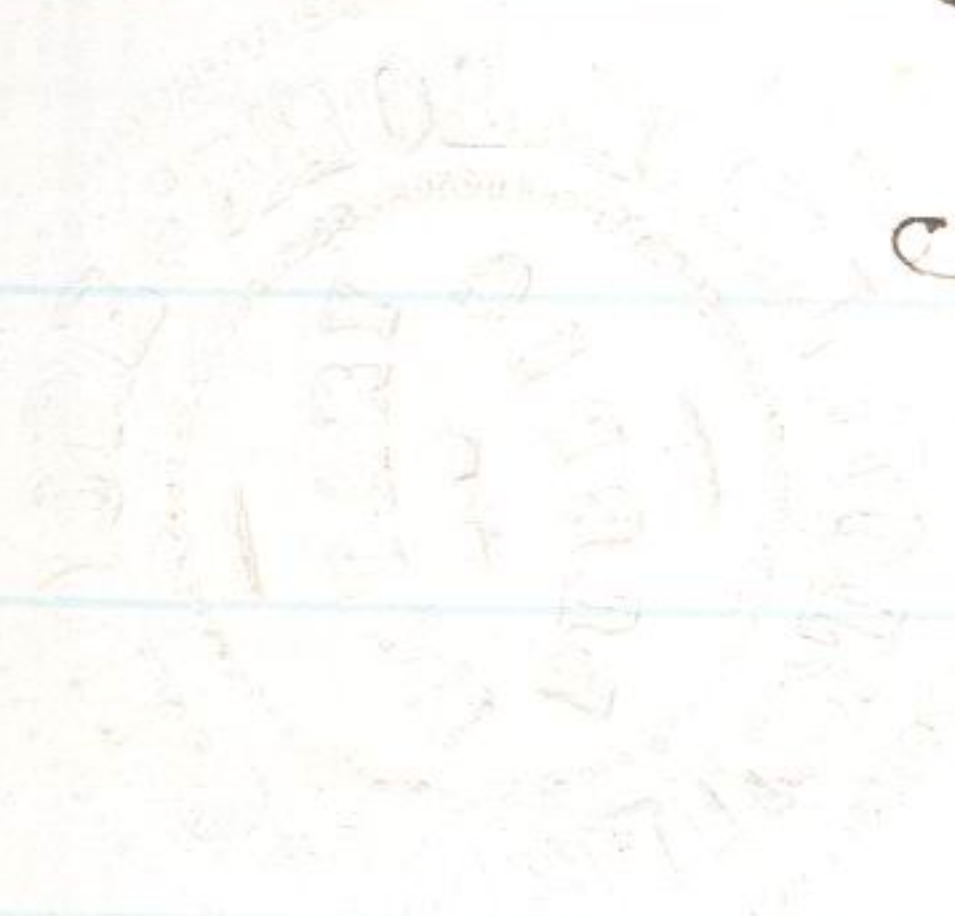

2
P. 472
blank

473

no

I, Erchas H. Love, and Benjamin
Baxter do solemnly swear
that I will faithfully execute
the duties of Chain Carrier
that I will level the chain
on uneven ground and plumb
the tall pins ^{no} ~~no~~ either by dropping
or sticking, the same that
I will report the true distance
on line to all notable objects
and the true length of all
lines measured by me to
the best of my skill and ability

E. H. Love,

B. Baxter

Sworn and subscribed to before
me this 27th Sept 1873

J. P. Deary
Notary Public

Field notes To complete
 the exterior lines of Township
 5 & 6 N. R. 37 & 38 East of
 the Wadumette Meridian by
 Grov Williams Dep. Surv.
 under his Contract No.

Dated 1872

Assisted by E. M. Love and
 B. Bayter Chumman
 Andrew Jasper Teagman
 and R. Hays Aronson
 and A. H. Linnins Compsman
 Work commenced September
 29th 1872

Township 6 N. R. 37 E. Will. Mer.

Begin at the established corner
 for Sec 19, 24, 25 & 30 on the
 Range line between Ranges
 37 & 38 E Township 6 N. Witness
 trees standing and agree with
 description furnish me by

Between 37th & 38, E. T. C. N.R. Hill, Mer.

North between Secs 13 & 14.

Var. 22° 3

10.30 Enter timber

16.30 Ridge - 150 ft. Falls East

23.80 Bottom of Gulch 300 ft. Falls ^{East} ascend

24.00 Leave timber

34.00 Enter timber

40.00 Set post for 1/4 Sec. Cor. from which a Fir tree 6. in. dia. bears N. 15° W. 21 lks dist. no other convenient on side hill face East

51.60 Intersect State line at a point 15.30 N. of the 41. mile post I set post for Closing Cor. from which a Lamurack 10. in. dia. S. 70° E 2 lks distant a Fir 8. in. dia. bears S. 50° W 40 lks distant

Land mountainous

Timber Fir Lamurack & Pine

Sept. 29th 1872

Between R 38 & 39 S. C.W. Hill, Mex.

for the Cor of Secs 19, 20, 24 & 25 -
Land hilly 2nd Rate Lumber
Pine Fir Lummuck

North on E boundary Sec 13,
Car 2 1/2 E

6,00⁶

Ridge full N 72 W 300 ft

18,00¹⁴

Bottom a creek 13 lbs wide full N
50° W a prong of Mill Creek, ascend

40,00⁴⁰

Set post for 1/4 Sec Cor from which
a Birch 8 in, dia. bears N 76° W 46 lbs

" Fir 9 " " " " S 38° E 29 lbs, d

52,20^{52,20}

Intersect the State boundary 16, 80 chs
West of the 4 1/2 mile Cor, Set Stone

28 x 21 x 15, in mound of Stone for
closing cor, to fractional Towns

C.W. R. 38 & 39 E

Land mountainous

Lumber Fir Lummuck & Pine

Complete Oct. 2nd 1872

437
Town C. R. 38, E. Will. Mer.

6.60	Gulch falls N 30° W. 100 ft ascend
11.35	Summit of steep Ridge 400 ft falls NW
39.80	Set post & mark Stone in mound & pits for $\frac{1}{4}$ Sec. Cor.
70.00	Enter timber
73.20	Creek falls NW. 6 lks wide
79.60	The cor. for Secs. 13, 14, 23 & 24 Sand Hill & Rocky Timber country fir Pine Larch & Willow
<hr/>	
North between Secs 13 & 14	
var 21° E	
Decend	
3.50	Creek falls NW. 18 lks wide ascend
25.50	Ridge & decend
40.00	Set post & mark Stone in mound with pits for $\frac{1}{4}$ Sec Cor
42.00	Ascend
52.10	Intersect State line 16.20 lks N of the mound for $\frac{1}{4}$ mile Set post & marked Stone & raised mound of Stone for Cor to

Low. C. & N. R. 38. & Hill. Mer.

Fractional Secs 13, & 14

Sand Hummocks & Rocky
Timber Fir Pine Lammara & Spruce
Cottonwood Birch & alder in Cr. bottom

Oct. 7, 1872

North between Secs 34 & 35

Var. 23° E

Decend

- 15.00 Sharp Spur falls N. 300 ft.
- 20.00 Gulch falls N. 200 ft.
- 27.00 Spur Fall N. 250 ft.
- 40.00 Set post on sharp rocky backbone
in mound of Rock for 1/4 Sec Cor
a Red Fir Tim. diu bears N 10° E 2 1/2 lks dis
- 52.00 Bottom of Gulch 400 ft. & Spring branch
2 lks. with flows N. ascend
- 80.00 Set post & marked stone mound with
pits for Cor to Secs 26, 27, 34, & 35.
Sand Rough & Rocky Timber Pine
Fir Spruce & Lammara & Cottonwood
& willow

Low C. R. 38 & Hill Creek

I run S $89^{\circ}45'$ W on a true line between
Secs 15 & 22

- 5.40 Enter timber
9.40 Cr. falls ^W 12 lks wide
27.00 Cross spur falls W about 200 ft
33.10 A Lammrack 18 ins. dia.
39.70 Set post for $\frac{1}{4}$ Sec Cor from which
a white fir 7 in dia bears S 44° W 7 lks dist
" " " 4 " " " " " " W 30° E 11 " "
43.10 Enter bottom
45.00 Mill Cr. 75 lks wide runs S W
57.00 Leave bottom
79.40 The Cor. for Secs 15, 16, 21 & 22 W of

the Cor. for Secs 15, 16, 21 & 22

North between Secs 15 & 16

Var $22\frac{1}{2}^{\circ}$ E

- 40.00 Set post & mark stone 18x14x7 for $\frac{1}{4}$ Sec. Cor.
52.70 Intersect State line at a point 15.96 W.
44 mile post Set post in mound with
pit for the cor of fractional Secs 15 & 16
Mountains. Rough Lumber Fir Pine & Lammrack
Oct 11, 1872

511
S. 6 N. R. 38 E Hill. Mer.

- 79,80 Intersect W & S line 30 lks W of the Cor. for Secs 15, 16, 20 & 21 from this Cor. I run N 89° 47' W on a true line between Secs 16 & 21
- 26,80 Shell worths Saw mill bears S. 25 chs dist
- 39,90 Set post for 1/4 Sec. Cor. from which
W. Pine 24 in dia bears N 68° 8' 99 lks
- 42,00 Scattering timber
- 74,30 Gulch Falls S.
- 79,80 The Cor. for Secs 16, 17, 20 & 21
Sand *Quercus*
Lumber Pine Fir Lumber

North between Secs 16 & 17

R or 20 E

- 40,00 Set post in mound & pits for 1/4 Sec Cor
- 82,13 Intersect N Boundary State line 16.30 chs N. of 43 mile post & set post in mound for cor to fractional Sec 16 & 17
Pine 8 in dia bears S 70° W 50 lks dist
mountainous Good Grass land.

Oct 13, 1872

513

Law 6. S R 38 E Well. Met.

40.16² Set post for 1/4 Sec, Cor, from which
 a Fir 12 in dia bears S 12° W 20 lks dis
 " " 8 " " " N 10° E. 40 " "

45.52 Spr. branch 1 lks wide runs W

54.50 Mill Cr. flows N W 60 lks wide

59.00 Road Walla Walla & Saw Mill

60.00 Leave bottom of Mill Cr.

80.52 The Cor for Secs 17, 18, 19 & 20
 Land Newly Lumber Pine & Birch

North Between Secs 17, 18
 Par. 2 1/4 E

1.00 Leave timber ascend

22.00 Sharp Ridge falls S W descend

33.00 Gulch falls S W ascend

40.00 Set post for 1/4 Sec, Cor. & Rock 148
 12x6 in mound of Rock

52.40 Intersect N boundary of State 15.90
 Chs N. of 42 mile post, set post
 in mound with pits for the Cor of
 Fractional Secs 17, & 18
 Oct, 16th, 1872

I George William Deputy Surveyor do solemnly swear that in pursuance of a contract with W. H. Odell Surveyor General of the public lands of the United States in the State of Oregon bearing date the 20th day of July 1872 and in strict conformity to the Laws of the United States and the instructions furnished by the said Surveyor General, I have faithfully surveyed the Exterior and Subdivisional lines of Township 5 North Range 37 East, the Exterior and Subdivisional lines of Fractional Townships 6 North Ranges 37 & 38 East and the Subdivisional lines of Fractional Township 5 North Range 38 East ^{in the State of} Oregon aforesaid and do further solemnly swear that the foregoing are the true and original field notes of such survey.

George William
Deputy Surveyor

Subscribed & sworn to
before me this 6th day
of May A. D. 1873

W. H. Odell
Surveyor General

584

585

List of Persons Employed to
assist in running measuring or
marking the lines and corners described
in the foregoing field notes showing
the respective capacities in which
they acted

E H Love & B Baxter Chairman
Richard Hays Assessor
Andrew Jasper Flagman
A H Simmons Comptroller

We hereby certify that we have appointed
Geo Williams, deputy surveyor, in
surveying the exterior boundaries and in subdividing
Townships Number 5 & 6 N R 37 & 38 E and
four sections in Township 5 N 38 E, of the Willamette
Meridian Territory of Oregon and that said
Townships have been in all respects, to the
best of our knowledge and belief well
and faithfully surveyed and the boundary
monuments planted according to the instructions
furnished by the Surveyor General,

E H Love, Chairman

B Baxter ..

R Hays Assessor

Andrew Jasper Flagman

A H Simmons Comptroller

Given and subscribed to before me
on this 24th day Dec 1872

O P Lacey
Notary Public

We the undersigned Bondsmen in the Contract No. 176 made between George Williams Deputy Surveyor and the Surveyor General of the United States for the State of Oregon bearing date the 20th day of July 1873 hereby consent to the substitution of fractional Township 5. & 6. North Range 38 East. Surveyed instead of Township 4 North Range 37 East left unsurveyed by reason of unfitness; And we hold ourselves in every respect liable under said Contract with said Substitution as under the original Contract
G. Williams

Mr S. C. Adams the other Bondsmen on the above mentioned contract is out of the State, he being in Cincinnati Ohio and will not return the present year.

L. H. Williams
Dep. Sur.

Salem, May 7th 1873.