

# Index.

To N. 12.37 E.

To N. R. 37 E.

Copy all these

		65	64	
13	24	25	31 1/2	63
		See	35	62
		E	34	61
			33	61
			32	60
			31	59

(Run index around)

(Run index around)

5 N - 37 E	57
See	

Township 60 N, Range 37 East, Will, Mer,  
8000 set a post corner for sections

1, 2, 3 & 4, from which

A Larch 18 in dia, bears  $N 49^{\circ} W$ , 8 ths

A " 18 " " "  $S 53^{\circ} W$ , 32 "

A " 20 " " "  $S 12^{\circ} E$ , 30 "

A " 20 " " "  $N 54^{\circ} E$ , 34 "

This line passes up steep  
mountain side

Timber excellent Fir &  
Larch Undergrowth same and  
Green Willow and Maple,

East to South boundary of  
section 36 T 6 N, Range 37 East

variation  $21^{\circ}$  East,

4000 Set 4 Section post corner

from which

A Fir 20 in dia, bears  $S 54^{\circ} 30' E$  20 ths

A Willow 5 " " "  $N 19^{\circ} W$ , 30 "

8000 Set a post corner for ~~at~~

Townships 54 & 6 N, Ranges 37 & 38 E,

Township N. Range 37 East W. Mer,  
from which

- A Fir 20 in dia, bears N, 7° W, 23 lbs
- A " 20 " " " N, 18° E, 22 "
- A " 20 " " " S, 40° E, 18 "
- A " 10 " " " S, 23° W, 24 "

This line passes through  
excellent timber, Land  
gently rolling soil good  
timber Fir Larch & Pine  
under growth some and  
Maple & Gum,

North on East boundary  
of sections 36, 6 N, W, 37 East,  
Variation 21° East,

4000 Made corner for section 100  
on Gum tree 2 inches  
which a Fir 20 in bears S 41° E 12 lbs  
a Gum 8 " " S, 38° W, 25 "

8000 Set a post corner for sections  
25. 36. 31 & 30 on side of Butte

Township 6 N, Range 37 East Will, Mer,  
from which

- A Fir 20 in, dia. bears S. 12° E, 80 lbs
- A " 3. " " " S, 50° 30' W, 24 "
- A " 10 " " " N 24° 30' E, 50 "
- A Larch 14 " " " N, 44° W, 57 "

This line passes through  
 Excellent timber Fir Larch  
 Spruce & Pine, Undergrowth  
 Junce & Willow & Maple  
 Sailed 1<sup>st</sup> Kate,

May 27<sup>th</sup> 1865,

North on East boundary of sec  
 25 Township 6 N, Range 37 East  
 Bar 20° East,

400 Lease Timber

32,00 Summit of ridge + 500

Bar 17° East,

40,00 Set 4 Section post corner  
 deposited marked stone  
 and raised mound of  
 stones as per instructions

66

496

Township 6 N, Range 3 E, East Willamette,  
8000 Mark corner on fir 4 in, Aug 180

for sections 19, 30, 24 & 25,  
in thick growth of  
L' timber small growth,

on steep hill side facing  
the N, East, from which

A Fir 4 in Dia bears S 40° W, 6 lbs

A " 8 " " " " S 50° E, 5 "

A " 4 " " " " N 20° W, 10 "

A " 3 " " " " N 10° E, 8 "

This line passes over high  
Ridge laid on the South on  
the N East, some Lumber,  
course of Ridge West of  
North,

I was unable to  
trace this line further  
by reason of a severe  
Storm of Wind rain  
hail and snow  
compelling us to.

Accent to the Valley,  
The distance from our  
Camp and the difficulty  
of getting to the work  
prevented our return,

This Township  
should be subdivided also  
One or two tiers of sections on  
the West side of Range 38 E  
The lands along the  
base of the Mountains are  
rich and produce well  
and wherever water  
can be had and sufficient  
level land to make a farm  
settlers have taken claims  
The timber is very valuable  
and would command a  
good price if put into  
market, The settlers are  
cutting the timber  
and taking it away quite

~~498~~

fact, and soon the land  
will be worthless unless  
put into Market,

The whole of the lands  
embraced in Contract  
No. 10, and the Addendum  
may be considered as one  
extended range of pasture lands.  
A very small portion, <sup>of</sup> which  
may be considered barren,  
compared with the whole a  
very small proportion can  
be cultivated to advantage,  
because of the dryness of the  
seasons, otherwise rich and  
productive, The Walla  
Walla River is a fine  
stream of cold water, well  
supplied with excellent  
fish, Trout & Salmon.

x

595

69  
~~497~~

The Valley along the river  
 is rich and very productive  
 but narrow until the river  
 enters the N. E. corner of  
 Township 5 N, R. 35 E, and the  
 hills are high and very  
 steep generally,

The other streams,  
 Dry Creek & Pine Creek, pass  
 through deep canyons  
 with narrow bottoms,

What is known as Walla  
 Walla Valley lies principally  
 in Washington Territory; but  
 some of the best lands are  
 situated in the fractional  
 Townships No 6 North of Range  
 34. 35 & 36 East, - here the land  
 is level or gently undulating  
 and the different streams  
 above named afford fine opportunities  
 for irrigation,




502

We hereby certify that  
 we assisted William H.  
 Odell and William S.  
 Lewis, deputy surveyors,  
 in surveying and marking  
 the following lines, to wit;  
 The 1<sup>st</sup> Standard Parallel North  
 between Townships 4 & 5 and  
 East through Ranges 31. 32,  
 33. 34. 35. & 37. East of Will. Mer,  
 also the subdivisional lines  
 of Townships 5 N. Ranges 33. 35 & 36,  
 do, 6 N, do, 34. 35 & 36 do,  
 do 4 do, do, 32 & 33 do,  
 and the exteriors of Townships  
 5 N Range 35. 36,  
 6 do, do, 34. 35. 36 & 37 East  
 4 do do 31. 33. & 35 do,  
 and that said lines  
 have been in all respects

To the best of our knowledge  
and belief, well and  
faithfully surveyed, and  
the boundary monuments  
planted according to the  
instructions furnished by  
the Surveyor General.

Cyrus Dion Chairman  
Robert Beck Assessor

State of Oregon }  
County of Benton } 1865 Subscribed  
and sworn to before me  
this 17 day of June 1865  
Geo. W. Greer  
Notary Public

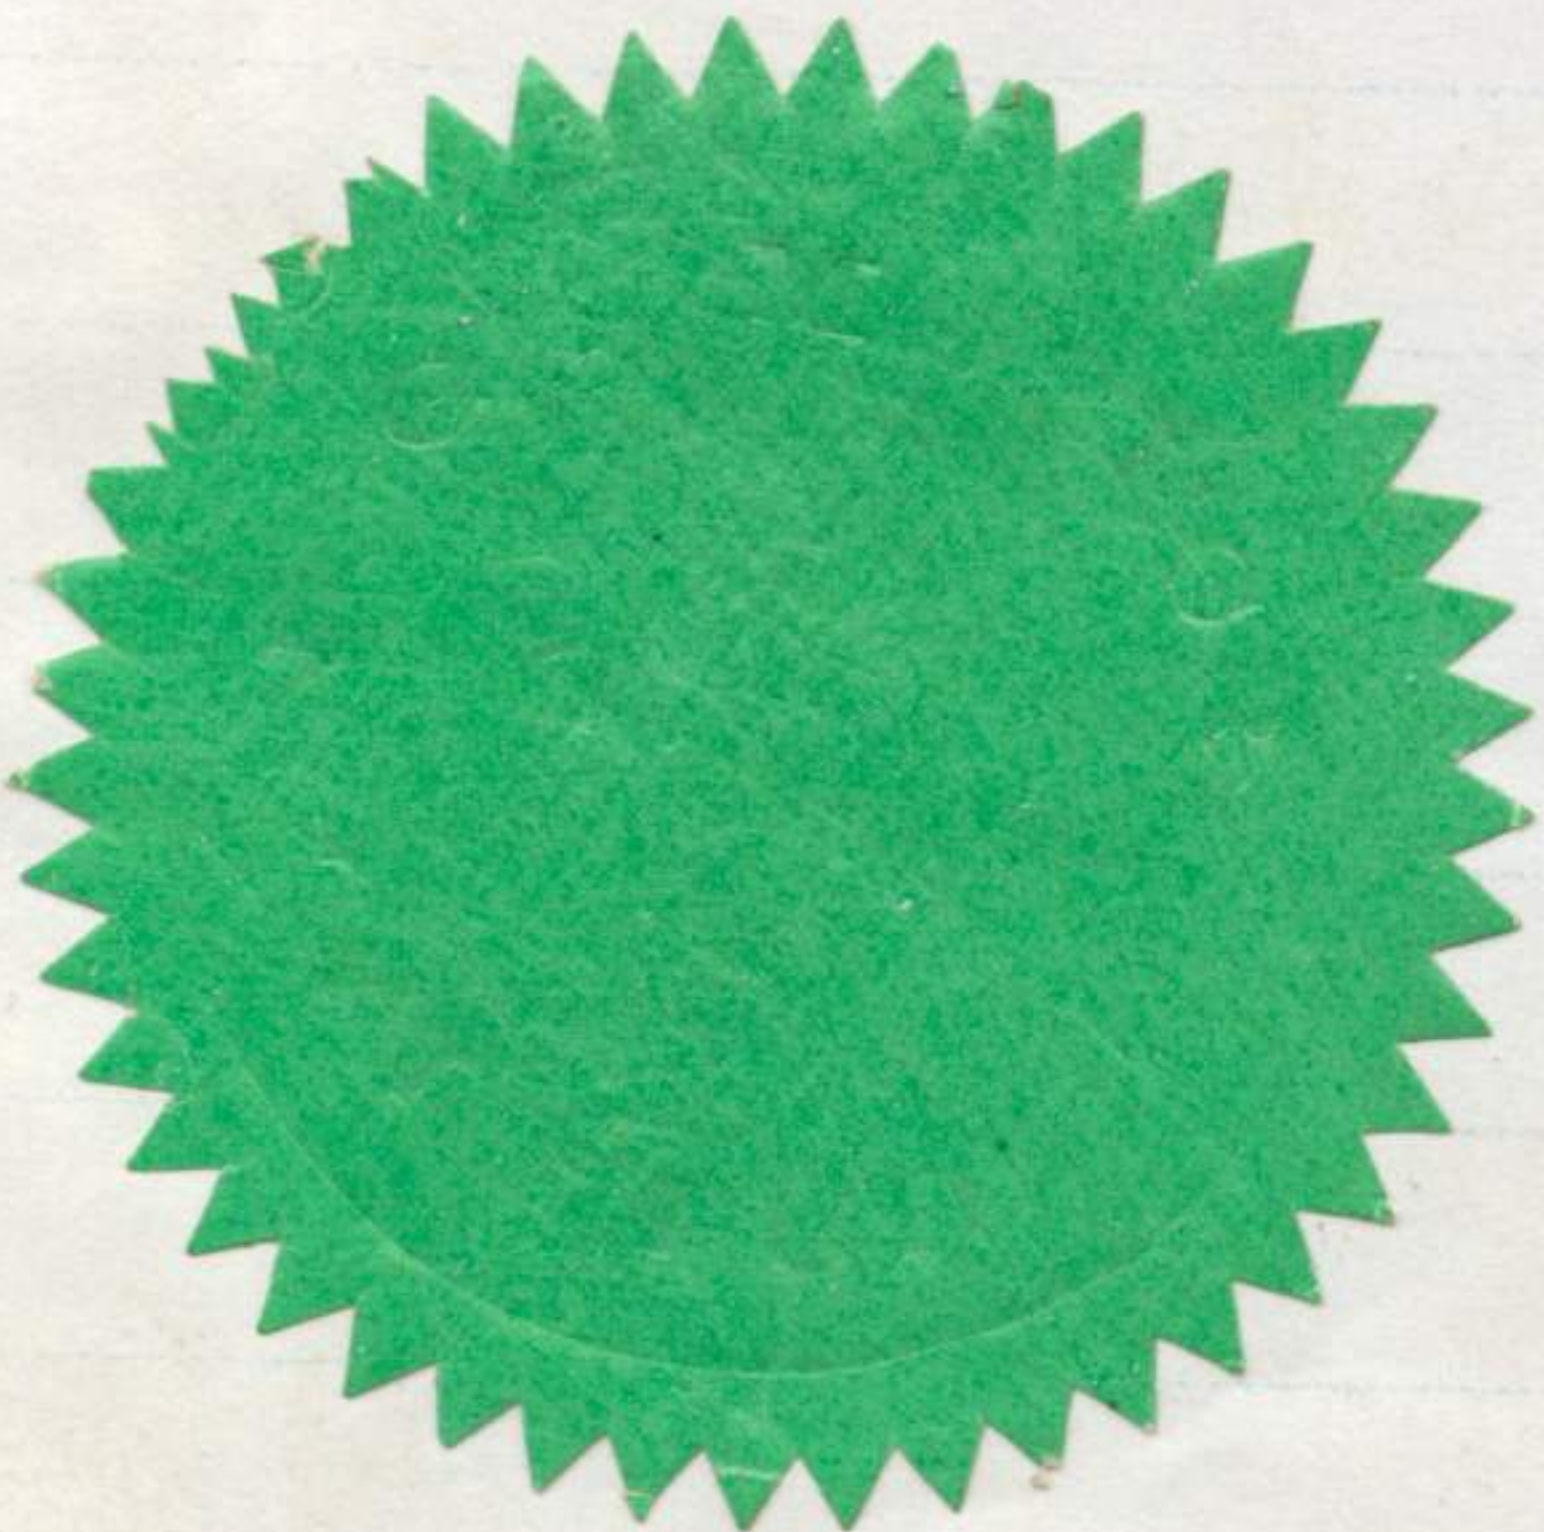

506

602

P.  
666-601  
Blank



I hereby certify that I assisted  
William H. Odell and William S.

Lewis deputy surveyor, in surveying  
the following lines, to wit;

The ~~1st~~ Standard Parallel North  
between Townships 4 & 5 North and

East through Ranges 31. 32. 33. 34.

35. & 37. East of Willamette Meridian

also the subdivisional lines

of Townships Nos 5 North Ranges 33. 35. & 36 E,

do, do, 6 do, do, 34. 35. & 36 do,

do, do, 4 do, do, 32 & 33 do,

and the Exterior of Townships

Nos 5 North Range 35 & 36, 37 East

do, 6 do, do, 34. 35. 36 & 37, do,

do, 4 do, do, 31. 33. & 35, do,

and that said lines have  
been in all respects

to the best of my knowledge and  
belief, well and faithfully surveyed,  
and the boundary monuments  
planted according to the instructions  
furnished by the Surveyor General,  
D. C. Wallace Chairman

State of Oregon )  
County of Lane ) ss.

Sworn & subscribed before me this  
24<sup>th</sup> day of June 1865

Joel Mann

Notary Public

