

Bk 117


See Page 74 - Line between 13824 not
within limit with the line bet 24825 ⁴⁷⁰
See Page 102. No Variation given at the
corner Osces 5, 6, 7 & 8

Transcript for Washington, made
July 29th, 1873,
W. B. W.

I A. H. Simmons having been
Employed by George William Deputy
Surveyor as compassman do solemnly
swear that I will well and faithfully
and to the best of my skill and ability
execute the duties as compassman
according to the Laws of the United
States and the instructions furnished
by the Surveyor General of Oregon

Subscribed and sworn
to before me this 13th
day of May A D 1873
C. Moore
Notary Public

A H Simmons

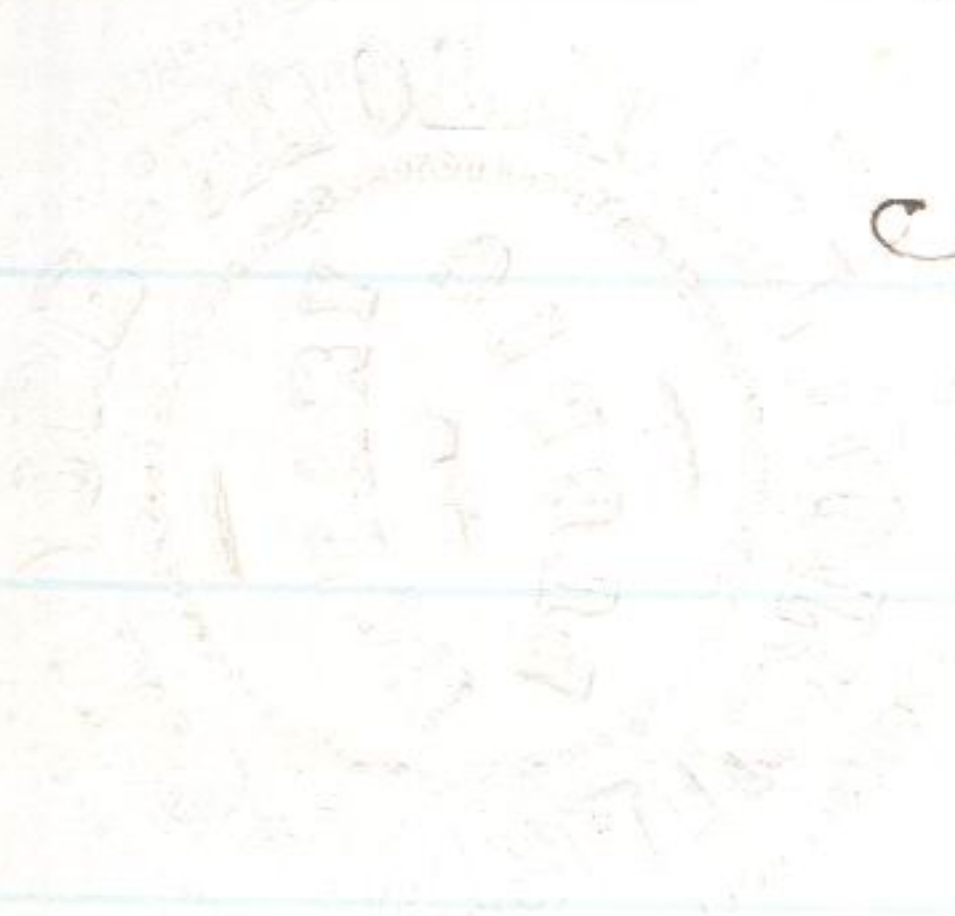

2
P. 472
blank

473

no

I Charles H. Love, and Benjamin
Baxter do solemnly swear
that I will faithfully execute
the duties of Chain Carrier
that I will level the chain
on uneven ground and plumb
the tall pins ^{no} either by dropping
or sticking, the same that
I will report the true distance
on line to all notable objects
and the true length of all
lines measured by me to
the best of my skill and ability

C. H. Love,

B. Baxter

Sworn and subscribed to before
me this 27th Sept 1873

J. P. Deery
Notary Public

Field notes To complete
the exterior lines of Township
5 & 6 N. R. 37 & 38 East of
the Wadumette Meridian by
Grover Williams Dep. Sur.
under his Contract No.

Dated 1872

Assisted by E. M. Love and
B. Baxter Chumman
Andrew Jasper Teagarden
and R. Hays Aronson
and A. H. Linnins Comptroller
Work commenced September
29th 1872

Township 6 N. R. 37 E. Will. Mer.

Begin at the established corner
for Sec 19, 24, 25 & 30 on the
Range line between Ranges
37 & 38 E Township 6 N. Witness
trees standing and agree with
description furnish me by

Between 586 N. Range 38. E Hill, Mer.

- 80.00 Set post on summit of trail ridge
in mound of stone for the Cor. to Secs.
1, 2, 35 & 36. from which a Spruce
7 in. dia. bears N. 2° E 49 lks dist
no other trees convenient, Land
mountainous, Lumber Blue Pine
Spruce Lamsack & Fir
- East on S. boundary of Sec. 36
Var. $21\frac{3}{4}^{\circ}$ E.
- 40.00 Set Basalt Stone $27 \times 18 \times 10$ for $\frac{1}{4}$ Sec, Cor.
a Pine tree 13 in. dia bears N. $27\frac{1}{2}^{\circ}$ E 86 lks
dist. no other trees convenient
- 67.00 Ridge full north
- 80.00 Set post in mound of earth with pits
& planted marked basalt stone 6×6
 $\times 4$ for the Cor. to Townships 586
N. R. 38 & 39 E
Land mountainous
Lumber Spruce, fir & Lamsack

Oct. 1st 1872

Between Ranges 38 & 39 S. C. W. Hill, Mex.

North on E. boundary of Sec 36.
Var. $21^{\circ} E$

5.
5.00

Drum

40.00
40.00

Set stone $22 \times 14 \times 18$ in mound
of earth & stone on side hill
face N.W.

43.
43.00

Bottom of gulch falls N $83^{\circ} W$ 400

56.
56.00

Ridge falls N. 300 ft.

80.
80.00

Set post on side hill face NW
for Cor. to Secs 25, 30, 31 & 36.

A Spruce tree 27 in. dia. bears N $27^{\circ} E$ 78 lbs

" Pine " 41 " " " S $24^{\circ} W$ 49 lbs

No other trees common, I saw
mountainous Limber Pine, Fir
Lamarck & Spruce Scattering & scrubby

North on E. boundary of Sec. 25

Var $21\frac{3}{4}^{\circ} E$. — De Cherting

40.
40.00

Set post for 1/4 Sec. Cor. from which
Fir 10 in. dia. bears N $84^{\circ} W$ 75 lbs dist

" 1/4 " " " S $59^{\circ} E$ 21 " "

80.
80.00

Set post & marked stone in mound

Between R. 38 & 39 E. T. C. W. Hill. Mer

of stone on side hill face N E
 a Lumberack 13 in. dia. bears N 50° E 190 lks
 " Fir 10 " " " " N 18° E 78 lks dist
 " " 7 " " " " S 40° E 91 " "
 Land mountainous Lumber Pine
 Fir Lumberack & Spruce

North on E. boundary of Sec 24
 Var 21° E

- 21.00 Bottom of Gulch a creek 7 lks wide
 full N W ascend
- 40.00 Set post for 1/4 Sec Cor from which
 Fir 8 in. dia. bears W 10° E 7 1/2 lks dist
 " " " " " S 30° W 42 " "
- 47.00 Ridge 400 ft. full N W
- 56.50 Bottom of Gulch falls N 60° W 200 ft
- 56.75 Creek 15 lks wide flows N 60° W ascend
- 80.00 Set post from which
 a Fir tree 10 in. dia. bears N 30° E 18 lks dist
 " " 11 " " " " N 42° W 76 " "
 " " 12 " " " " S 31° E 24 " "
 " " " " " " S 29° W 37 " "

Between R 38 & 39 S. C.W. Hill, Mex.

for the Cor of Secs 19, 20, 24 & 25 -
Land hilly 2nd Rate Lumber
Pine Fir Lummuck

North on E boundary Sec 13,
Car 2 1/2 E

6,00⁶

Ridge full N 72 W 300 ft

18,00¹⁴

Bottom a creek 13 lbs wide full N
50° W a prong of Mill Creek, ascend

40,00⁴⁰

Set post for 1/4 Sec Cor from which
a Birch 8 in, dia. bears N 76° W 46 lbs

" Fir 9 " " " " S 38° E 29 lbs, d

52,20^{52,20}

Intersect the State boundary 16, 80 chs
West of the 4 1/2 mile Cor, Set Stone

28 x 21 x 15, in mound of Stone for
closing cor, to fractional Towns

C.W. R. 38 & 39 E

Land mountainous

Lumber Fir Lummuck & Pine

Complete Oct. 2nd 1872

6N-38E General Description

This Township is rough and very
mountainous Canons & Ridges
Travers it in all directions and
is valuable for its timber
consisting of Pine, Fir, Larch
Spruce, Birch, cottonwood
Alder & Willow

The geological formation is
volcanic Basalt being almost
the entire rock

I George William Deputy Surveyor do solemnly swear that in pursuance of a contract with W. H. Odell Surveyor General of the public lands of the United States in the State of Oregon bearing date the 20th day of July 1872 and in strict conformity to the Laws of the United States and the instructions furnished by the said Surveyor General, I have faithfully surveyed the Exterior and Subdivisional lines of Township 5 North Range 37 East, the Exterior and Subdivisional lines of Fractional Townships 6 North Ranges 37 & 38 East and the Subdivisional lines of Fractional Township 5 North Range 38 East ^{in the State of} Oregon aforesaid and do further solemnly swear that the foregoing are the true and original field notes of such survey.

George William
Deputy Surveyor

Subscribed & sworn to
before me this 6th day
of May A. D. 1873

W. H. Odell
Surveyor General

584

585

List of Persons Employed to
assist in running measuring or
marking the lines and corners described
in the foregoing field notes showing
the respective capacities in which
they acted

E H Love, & B Baxter Chairman

Richard Hays Assessor

Andrew Jasper Flagman

A H Simmons Comptroller

We hereby certify that we have appointed
Geo Williams, deputy surveyor, in
surveying the exterior boundaries and in subdividing
Townships Number 5 & 6 N R 37 & 38 N, R 28 & 29 and
four sections in Township 5 N 38 E, of the Willamette
Meridian Territory of Oregon and that said
Townships have been in all respects, to the
best of our knowledge and belief well
and faithfully surveyed and the boundary
monuments planted according to the instructions
furnished by the Surveyor General,

E H Love, Chairman

B Baxter ..

R Hays Assessor

Andrew Jasper Flagman

A H Simmons Comptroller

Given and subscribed to before me
on this 24th day Dec 1872

C. J. Lacey
Notary Public

We the undersigned Bondsmen in the Contract No. 176 made between George Williams Deputy Surveyor and the Surveyor General of the United States for the State of Oregon bearing date the 20th day of July 1873 hereby consent to the substitution of fractional Township 5. & 6. North Range 38 East. Surveyed instead of Township 4 North Range 37 East left unsurveyed by reason of unfitness; And we hold ourselves in every respect liable under said Contract with said Substitution as under the original Contract
G. Williams

Mr S. C. Adams the other Bondsmen on the above mentioned contract is out of the State, he being in Cincinnati Ohio and will not return the present year.

G. Williams
Dep. Sur.

Salem, May 7th 1873.