

FIELD NOTES

Of the survey of the Subdivisional  
Lines of Township 5 South  
Range 30 East, Willamette Meridian,

Oregon, as surveyed by F. W. Campbell

U. S. Deputy Surveyor, under his Contract No. 468

dated April 12<sup>th</sup>, 1883.

Survey commenced, May 18<sup>th</sup> 1883

Survey completed, May 31<sup>st</sup> 1883

NAMES AND DUTIES OF ASSISTANTS.

....., Compassman.

J. S. Guttridge, Chainman.

~~L. A. Matlock~~, Chainman.


Frank Ellis, Chainman.

....., Chainman.

L. A. Matlock, Axeman.

....., Axeman.

....., Flagman.

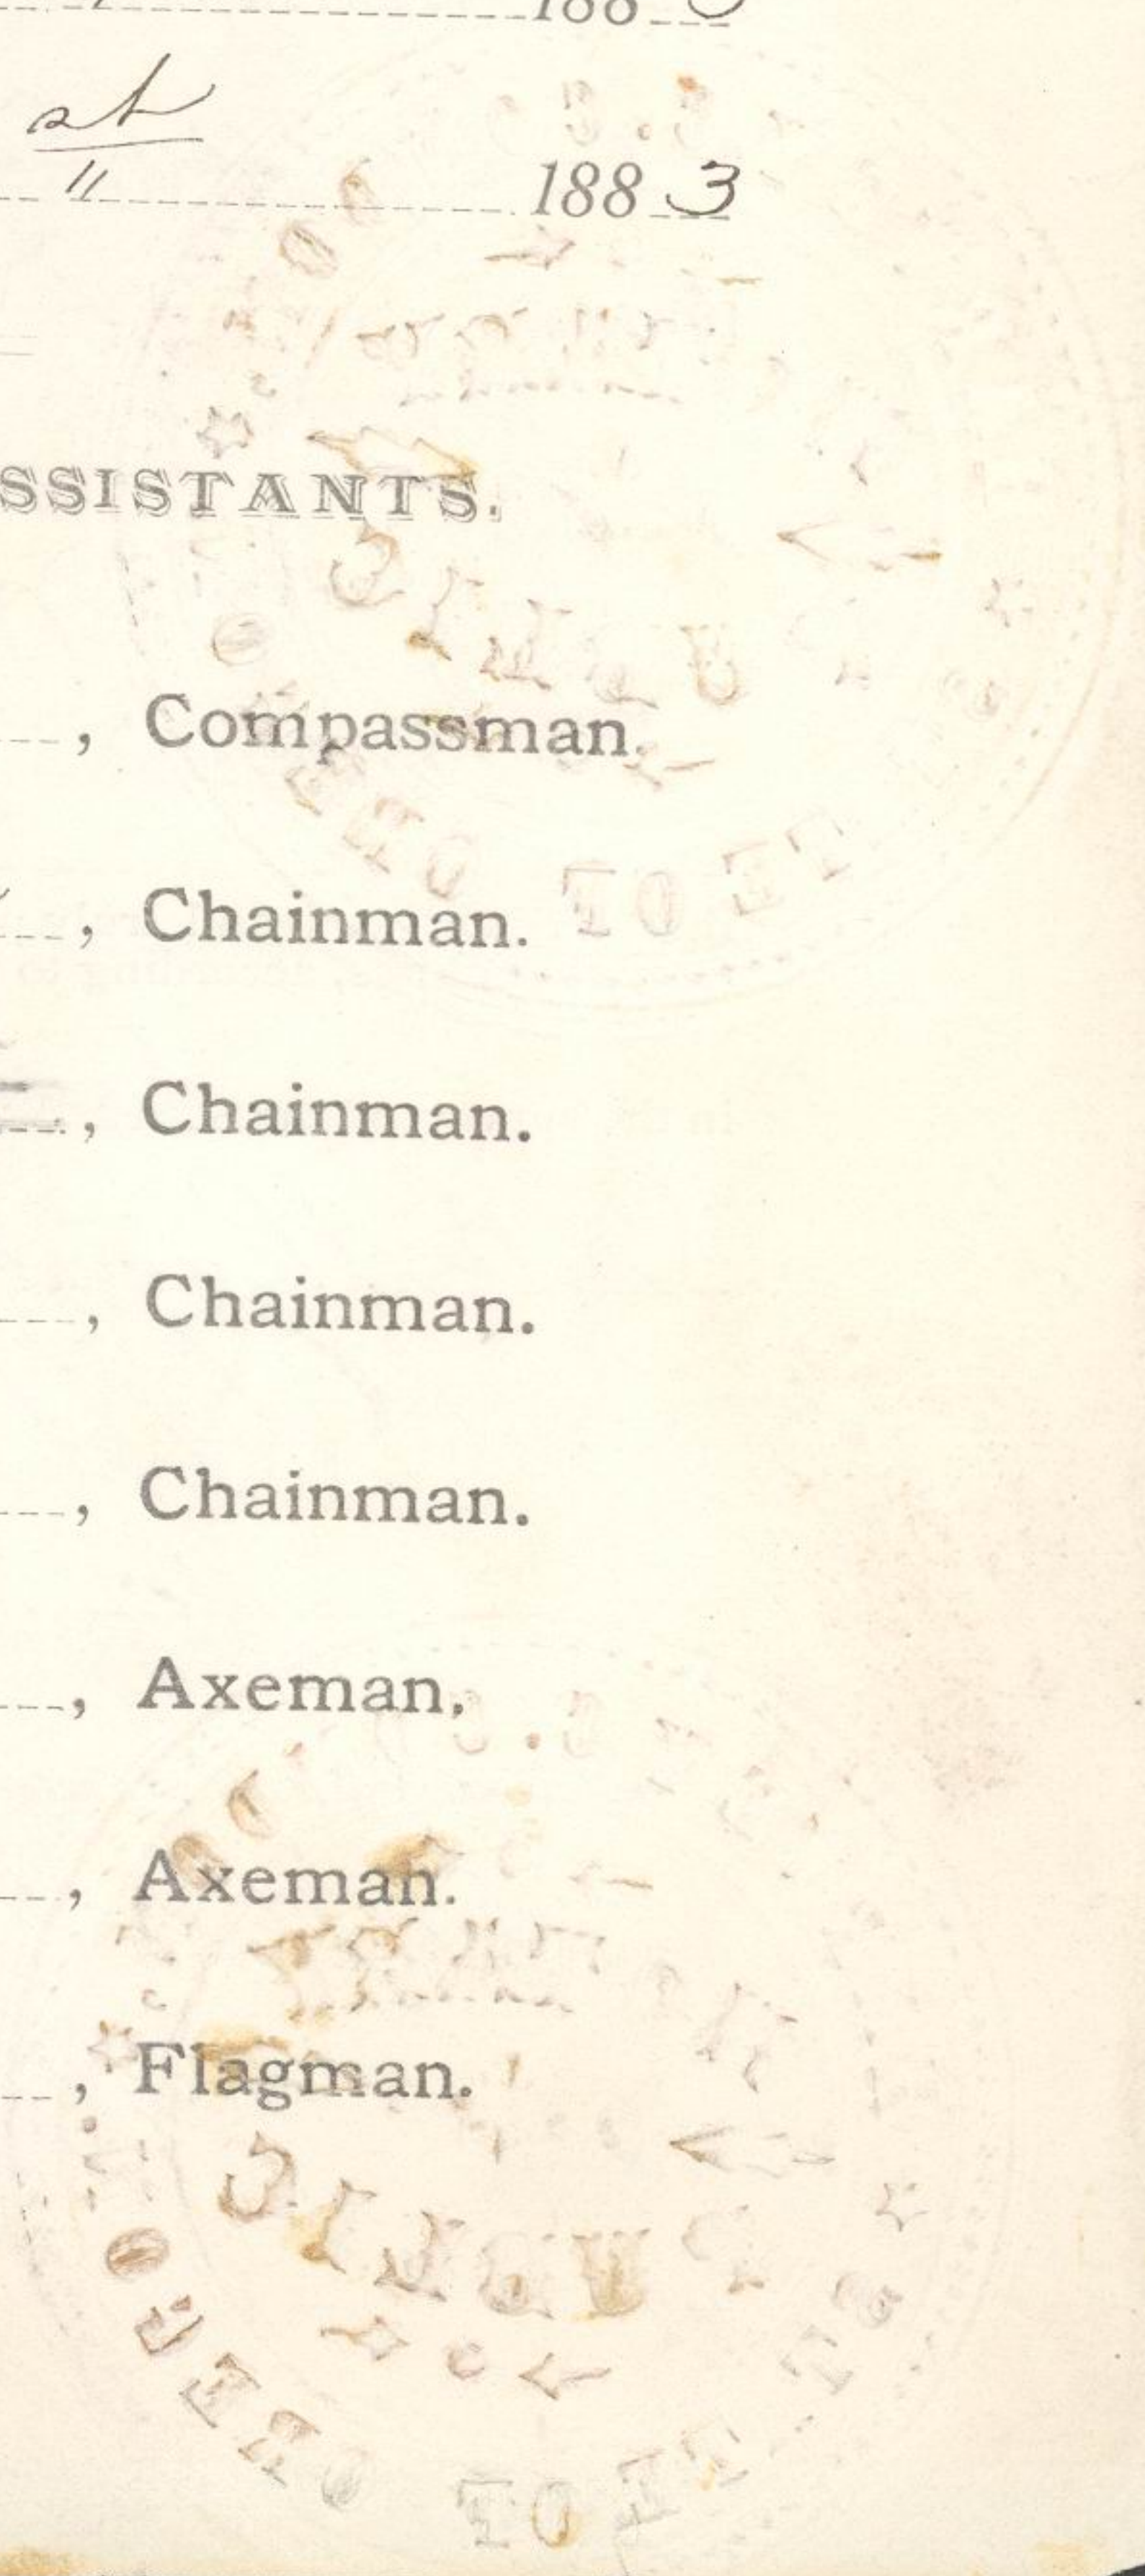

PRELIMINARY OATHS OF ASSISTANTS.

372

We, John S. Guttridge  
Frank Ellis

do solemnly swear that we will faithfully execute the duties of Chain Carriers, that we will level the chain over even and uneven ground, and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we will assist in measuring, to the best of our skill and ability, and in accordance with the instructions given us in

the survey of the Subdivisional  
lines of T. 5 S.  
R. 30 E. Willamette Meridian, Oregon.

John S. Guttridge, Chainman.  
Frank Ellis, Chainman.  
\_\_\_\_\_, Chainman.  
\_\_\_\_\_, Chainman.

Subscribed and sworn to before me, this Eighteenth  
day of April 1883

[SEAL.] Frank W. Campbell  
U.S. Deputy Surveyor

We, C. A. Matlock and

\_\_\_\_\_, do solemnly swear that we will well and truly perform the duties of Axemen in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability

in the survey of the Subdivisions of  
T. 5 S. R. 30 E. Willamette Meridian, Oregon.

Cory Matlock, Axeman.  
\_\_\_\_\_, Axeman.

Subscribed and sworn to before me, this Eighteenth  
day of April 1883

[SEAL.] Frank W. Campbell  
U.S. Deputy Surveyor

# INDEX.

Referring the Lines to the Pages of the field Notes.

T. *5 S.* R. *30 E.* Will. Mer.

6	<i>111</i>	5	<i>80</i>	4	<i>60</i>	3	<i>41</i>	2	<i>23</i>	1
<i>109</i>		<i>107</i>		<i>79</i>		<i>59</i>		<i>40</i>		<i>20</i>
7	<i>105</i>	8	<i>77</i>	9	<i>57</i>	10	<i>38</i>	11	<i>18</i>	12
<i>103</i>		<i>101</i>		<i>76</i>		<i>56</i>		<i>37</i>		<i>16</i>
18	<i>99</i>	17	<i>74</i>	16	<i>54</i>	15	<i>35</i>	14	<i>14</i>	13
<i>97</i>		<i>95</i>		<i>73</i>		<i>53</i>		<i>34</i>		<i>12</i>
19	<i>93</i>	20	<i>71</i>	21	<i>51</i>	22	<i>32</i>	23	<i>10</i>	24
<i>91</i>		<i>89</i>		<i>69</i>		<i>50</i>		<i>31</i>		<i>8</i>
30	<i>87</i>	29	<i>67</i>	28	<i>48</i>	27	<i>29</i>	26	<i>6</i>	25
<i>85</i>		<i>84</i>		<i>65</i>		<i>46</i>		<i>28</i>		<i>4</i>
31	<i>82</i>	32	<i>62</i>	33	<i>44</i>	34	<i>25</i>	35	<i>1</i>	36

Meanders of \_\_\_\_\_ Pages \_\_\_\_\_ to \_\_\_\_\_

Meanders of \_\_\_\_\_ Pages \_\_\_\_\_ to \_\_\_\_\_

Subdivisions of T. 5 S R. 30 E. 381

Willamette Meridian, Oregon.

Survey commenced. May 18-  
1883 with a Burts improved  
Solar Compass.

I commenced at the Standard  
cor. to secs. 35 and 36 on the  
S boundary of the township  
which is a basalt stone  
20 x 8 x 4 ins. set firmly in  
the ground, marked S.C.  
with 1 notch on E. and  
5 notches on W. edges.

from which  
a fir 16 ins. dia. brs. N. 44° E.  
56 lks. dist. marked T. 5 S.  
R. 30 E. S. 36 B.T.

No tree on N.W. and a mound  
of stone around cor.

Thence I run  
North bet. secs. 35 and 36

Var. 20° 15' E.

Descending abruptly to  
18.00 foot of hill and Snake

Subdivisions of T. 5 S R. 30 E. 405

Willamette Meridian, Oregon.

From the Standard cor. to secs. 34 & 35 on the S. boundary of township which is a basalt stone 15 x 12 x 4 ins. firmly set in ground marked B.C. with 2 notches on E. & 4 notches on W. edges;

from which, A pine 20 ins. dia. brs. N. 36° E. 168 lks. dist. marked T. 5 S. R. 30 E. S. 35 S.E. B.T. -

No tree on N.W. - and a mound of stone 3 ft. in dia. & 18 ins. high around corner.

Trun

North bet. secs. 34 & 35

Var. 20 1/4° E.

40.00 Set a fir post 3 ft. long 3 ins. square 24 ins. in ground for 1/4 sec. cor. marked 1/4 S. on W. face; from which,

A tamarack 6 ins. dia. brs. S 82° E.

Subdivisions of T. 5 S. R. 30 E.

Willamette Meridian, Oregon.

Land rolling. Soil 3<sup>rd</sup> rate.  
Densely covered with forests  
of pine and fir 80.02 chs.

From the Standard cor. to  
secs. 33 and 34 on the S.  
boundary of the township  
which is a pine post 4 ft.  
long 4 ins. square firmly set  
in the ground marked  
S. E. T. 5 S. R. 30 E. on A.

S. 34 " E. 8  
S. 33 " N. faces:

with 3 notches on E. & N. edges,  
from which,

A tamarack 10 ins. dia. brs. N. 38° W.  
10 lks. dist. marked T. 5 S. R. 30 E.

S. 33 B. T.

A fir 5 ins. dia. brs. N. 31° E. 19 lks. dist.  
marked T. 5 S. R. 30 E. S. 34 B. T.

62

442

Subdivisions of T. 5 S. R. 30 E.

Willamette Meridian, Oregon.

Remainder open timber

May 25, 1883

From the Standard cor. to  
secs. 32 and 33 on the S.  
boundary of township which  
is a basalt stone 20 x 10 x 8  
ins. firmly <sup>set</sup> in ground and  
marked S. E. with 2 notches  
on N. and 4 notches on E.  
edges; from which,  
A fir 15 ins. dia. br. N. 52° W. 70  
lks. dist. marked T. 5 S. R. 30 E. S. 32 B. T.  
A pine 12 ins. dia. br. N. 17° E. 62 lks.  
dist. marked T. 5 S. R. 30 E. S. 33 B. T.

Iron  
North bet secs. 32 & 33  
Var. 20° E.

26.89 Pine 40 ins. diam.

82 462

Subdivisions of T. 5 S. R. 30 E.

Willamette Meridian, Oregon.

From the Standard cor. to  
secs. 31 & 32 on the S. bdy.  
of township which is a  
basalt stone 16 x 8 x 7 ins.  
set firmly in the ground  
and marked S.C. with  
5 notches on E. and 1 notch  
on W. edges; from which,  
A pine 22 ins. dia. br. N. 38° E. 22 lks. dist  
marked T. 5 S. R. 30 E. S. 32 S.C. B.T.  
A pine 20 ins. dia. br. N. 73° W. 34 lks. dist  
marked T. 5 S. R. 30 E. S. 31 S.C. B.T.

Iron

North bet. secs. 31 & 32

Var. 20° E.

Over gently rolling ground.

40.00 Set basalt stone 15 x 12 x 6 ins.

10 ins. in ground for  $\frac{1}{4}$  sec.

cor. marked  $\frac{1}{4}$  on W. face;

from which,

A pine 30 ins. dia. br. S. 59° W. 93



495A

# FINAL OATHS FOR SURVEYS.

A list of the names of the individuals employed by F. W. Campbell, U. S. Deputy Surveyor, to assist in running, measuring and marking the lines and corners described in the foregoing field notes of the survey of the Subdivisional lines of T 5 S R 30 E Willamette Meridian, Oregon, showing the respective capacities in which they acted :

- John S. Guttridge, Compassman.
- John S. Guttridge, Chainman.
- Frank Ellis, Chainman.
- Frank Ellis, Chainman.
- E. H. Matlock, Chainman.
- E. H. Matlock, Axeman.
- E. H. Matlock, Axeman.
- E. H. Matlock, Flagman.

## FINAL OATHS OF ASSISTANTS.

We hereby certify that we assisted F. W. Campbell, U. S. Deputy Surveyor, in surveying all those parts or portions of the Subdivisional lines of T 5 S R 30 E Willamette Meridian, Oregon, as are represented in the foregoing field notes as having been surveyed by him and under his direction ; and that said survey has been in all respects, to the best of our knowledge and belief, well and faithfully surveyed, and the corner monuments established, according to the instructions furnished by the U. S. Surveyor General of Oregon.

- John S. Guttridge, Compassman.
- John S. Guttridge, Chainman.
- Frank Ellis, Chainman.
- Frank Ellis, Chainman.
- Frank Ellis, Chainman.
- E. H. Matlock, Chainman.
- E. H. Matlock, Axeman.
- E. H. Matlock, Axeman.
- E. H. Matlock, Flagman.

Subscribed and sworn to before me, this Twenty third day of August 1883

[SEAL.] J. B. Curtis  
Notary Public for the State of Oregon

## FINAL OATH OF DEPUTY SURVEYOR.

I, J. W. Campbell

United States Deputy Surveyor, do solemnly swear that in pursuance of in-

structions received from

James C. Galman

U. S. Surveyor General for Oregon, bearing date of the

12<sup>th</sup>day of April, 1883, I have well, faithfully and truly, in my own proper person, and in strict conformity with the instructions furnished by the U. S. Surveyor General for Oregon, the Surveying Manual, and the laws of the United States, surveying all those

parts or portions of

the Subdivisional lines  
of Township 5 South Range 30 EastWillamette Meridian, in the State of Oregon, as are represented in the foregoing Field Notes as having been surveyed by me and under my directions; and I do further solemnly swear that all the corners of said survey have been established and perpetuated in strict accordance with the Surveying Manual, printed instructions, the special written instructions of the U. S. Surveyor General for Oregon, and in the specific manner described in the field notes, and that the foregoing are the *true* field notes of such survey, and should any fraud be detected I will suffer the penalty of perjury under the provisions of an Act of Congress approved August 8, 1846.J. W. Campbell

U. S. Deputy Surveyor.

Subscribed and sworn to before me, this

Twenty third

day of

August 1883J. B. Curtis  
Notary Public  
for Union Co Oregon

496A

**Office U. S. Surveyor General,**

Portland, Oregon, *Jan 7*, 188*4*

The following Field Notes of the Survey of the

*Subdivisional lines of  
T. 5 South, R. 30 East  
Mill Mer, Oregon*

executed by *F. W. Campbell*

under his Contract No. *468*, dated *April*

*12<sup>th</sup>* 188*3*, having been critically examined, the

necessary corrections and explanations made, the said field notes

and the survey they describe, are hereby approved.

*James C. Tolman*  
Surveyor General.

