


32

Sec. 11 T. 3 N R. 35 E

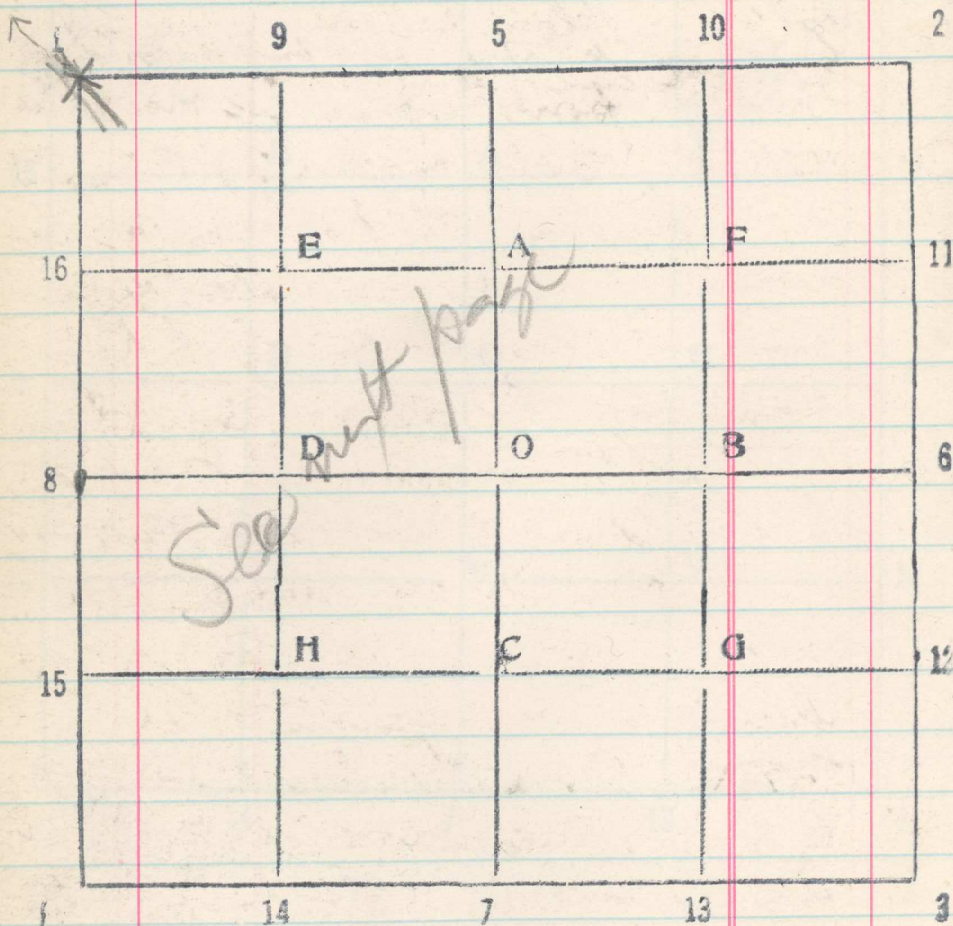

Jan. 14, 1920.

I find no trace of old cor. of Secs 23-10
+ 11, but find a pine 22 in diam., marked
but locate the cor. on line with

fence to W, and N, which J. A.
King says was built when old corners
were in place.

314

Edgar Simpson says fence has been
in same place for over 20 years & that
he has heard the fence was built about 20
years of life of old corners.
From this point a pine 22 in diam
N 7 1/2 E. 1.33 lbs. marked T 3 R 35 S 3

P.T. Blage faces this point, and marks
path, region, growth of about 1/2 in
since tree was marked. J. A. King
says John Kimball, County Surveyor
marked this tree about 6 or 8 years
ago. Evidently this tree is not old P.T.
but was marked not more than 7
years ago, as there are only 6 or 7 rings
showing on new growth of tree.

~~Thence~~ Fence to W, bears S 89° 30' W
by Solar. This cor. is about 50 lbs. N + 50 lbs. E
Thence South by Solar, bet pines 10 + 11
.50 Right bank Wild Horse Cr. N 8 W

20. Set 1/2 cor.

39.74 1/4 cor. bet Secs. 10 + 11 bears East 22 lbs.

Thence South by P.S. on temper