


38 Sec. 3 T. 2 R. 35

Examiner \_\_\_\_\_ Date \_\_\_\_\_ 19\_\_\_\_

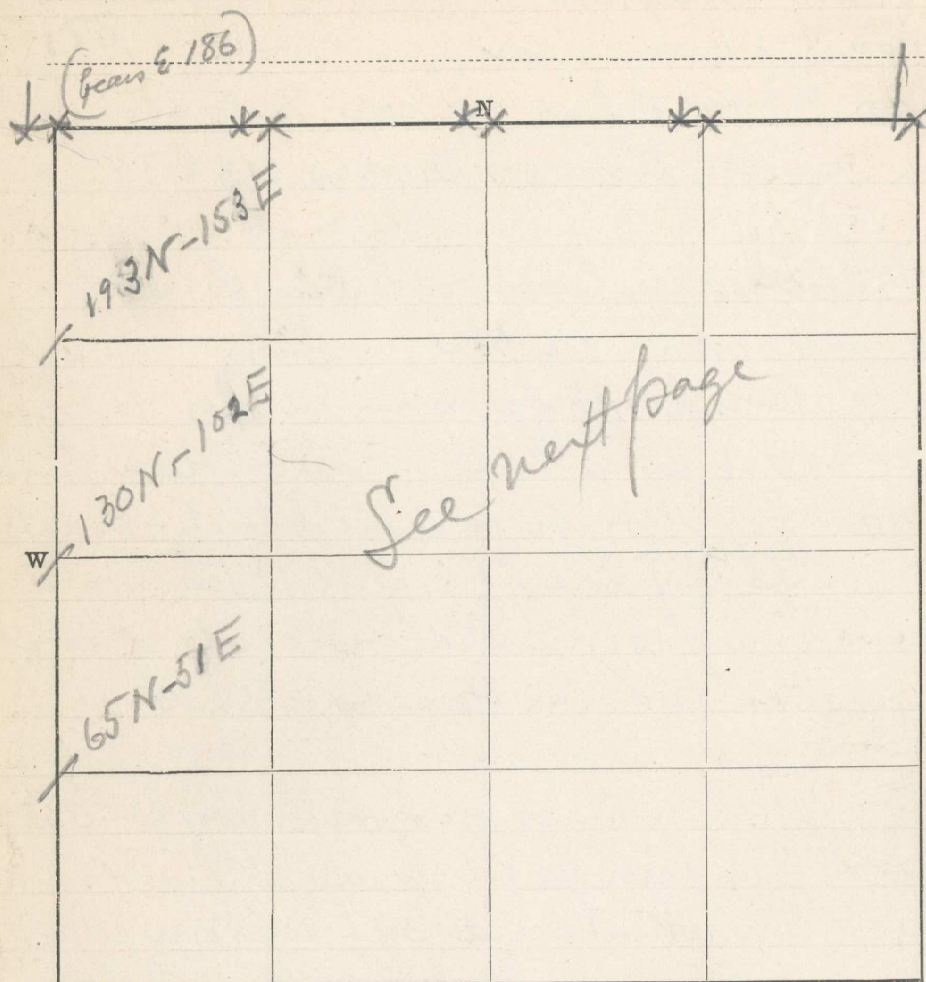

Scale 1320 ft. 1 in.

39

From tem cor to secs 35 & 36

Run East

372

- 20.00 Set tem  $\frac{1}{16}$  cor
- 40.00 Set tem  $\frac{1}{4}$  cor
- 60.00 Set tem  $\frac{1}{16}$  cor
- 78.66 Cor to sec 1 & 36 bears North 309 lks  
Intersection 134 lks short 309. lks off  
Correction 22 lks N to each  $\frac{1}{4}$  mile  
and 9  $\frac{1}{4}$  lks to each  $\frac{1}{4}$  mile or  $\frac{1}{16}$  cor

From Cor to secs 3, 4, 9 & 10 Run North

- 20.00 Set tem  $\frac{1}{16}$  cor in grainfield
- 40.00 Failed to find  $\frac{1}{4}$  cor. Set tem  $\frac{1}{4}$  cor
- 60.00 Set tem  $\frac{1}{4}$  cor
- 75.10 Cor to secs 33 & 34 bears E. 186 lks  
(92.75)