Attachment 7

Avian Impact Plan

STUDY PLAN

Avian Impact Monitoring Plan for the Chopin Wind Energy Facility Umatilla County, Oregon



Prepared for:

Chopin Wind, LLC 4365 Executive Drive, Suite 1470 San Diego, CA 92121

Prepared by:

Western EcoSystems Technology, Inc. 38 E Main Street, Suite 211 Walla Walla, WA 99362

May 30, 2015



INTRODUCTION AND BACKGROUND

Chopin Wind Energy Facility (Project or Facility) is a proposed 10 megawatt (MW) wind energy conversion facility. The Project is currently designed using five Vestas V110 2.0 MW or General Electric 2.0/116 or similar wind turbine generators mounted on 80 meter (m) steel towers, and is contracted to deliver power into the Weston Substation via a 69kV single pole project transmission line approximately 5.4 miles (8.7 kilometers) south of the Project (Figure 1). As the Project infrastructure has not yet been finalized, adjustments to the placement of turbines may require slight modifications to protocols described in this document.

The Project site consists of approximately 1,319 acres of privately owned land with two landowners. Specifically, the proposed Project would be located west of highway 11 and east of Pine Creek in Umatilla County, Oregon. The site has generally rolling topography, with current land uses consisting primarily of dry agriculture and limited livestock grazing (Figure 2).

Chopin Wind, LLC (Chopin Wind) contracted Western EcoSystems Technology, Inc. (WEST, see key personnel resumes in Appendix A) to update the Avian Impact Monitoring Plan ("Plan") prepared in 2013 for the then-proposed 99 MW Facility. Post-construction monitoring is necessary to meet requirements set forth in Chapter 5 of section HHH - Commercial Wind Power Generation Facility of the Umatilla County Development Code. This document provides the updated Plan based on the current development layout.

Fish have not been included in this Plan, as no streams or wetlands lie within the Project's impact area and no impacts on fish are expected. Furthermore, the proposed Project lies entirely within cultivated agricultural areas, surrounded by degraded and fragmented grasslands. Due to both the poor habitat quality and small Project size, non-avian wildlife impacts are not anticipated for the Project (see the *Reinterpretation of Baseline Survey Results for the modified Chopin Wind Energy Facility, Umatilla County, Oregon* report [in prep]). While a specific wildlife component has not been included in this Plan, the Project's direct impacts on bats will be documented during the avian impact monitoring study.

AVIAN IMPACT MONITORING PLAN BASED on 10 MW FACILITY

Introduction

This Avian Impact Monitoring Plan is developed to comply with the requirements of Section 152.616 (HHH)(5)(G) of the Umatilla County Development Code. The protocols are based on currently accepted fatality monitoring practices, follow the guidance provided in the USFWS Wind Energy Guidelines (USFWS 2012), and will be similar to other regional project protocols that went through Oregon's Energy Facility Siting Council's permitting process. This approach also facilitates comparison to regional fatality estimates.

Monitoring objectives will include developing bird and bat fatality rates associated with operation of the Facility and evaluating potential effects on nesting raptors. The primary components of the Plan include:

- Fatality Monitoring Program
 - Standardized Carcass Searches
 - Searcher Efficiency Trials
 - Carcass Removal Trials
 - Wildlife Incident Response and Handling System
- Raptor Nest Surveys

Fatality Monitoring Program

The primary objective of the fatality studies is to estimate the number of avian and bat fatalities attributable to collisions for the entire Project (i.e., wind turbines and any permanent meteorological (met) tower) on an annual basis. The fatality and injured wildlife monitoring phase of the study will begin once all the turbines are constructed and operational. Injured birds and bats found during the monitoring study will also be factored into the annual estimate. The study will be conducted for one year, with a less intensive monitoring program (incidental monitoring) in place for the life of the project. The methods are broken into four primary components: 1) standardized carcass searches, 2) searcher efficiency trials, 4) carcass removal trials, and 4) an incidental casualty and injured bird reporting system.

The following dates will be used for defining seasons in the study:

Spring Migration	March 16 – May 15
Summer/Breeding	May 16-August 15
Fall Migration	August 16-October 31
Winter	November 1-March 15

Standardized Carcass Searches

The number of avian and bat fatalities attributable to wind turbine or met tower collisions will be estimated based on the number of avian and bat fatalities found in the casualty search plots whose death appears related to collision with these structures. All carcasses located within areas surveyed, regardless of species, will be recorded and a cause of death determined, if possible, based on inspection of the carcass. Some carcasses may be necropsied to aid in determining cause of death. Total number of avian and bat carcasses will be estimated by adjusting for "removal bias" (scavenging), search frequency, and searcher efficiency bias.

Methods

Personnel trained in proper search techniques will conduct the carcass searches. The five Project turbines will be included in the standardized searches. Square plots 270 m (885 ft; or double turbine tip height) on a side and centered on the turbine will be searched by walking parallel transects (Figure 3). Studies at many wind plants (Erickson *et al.* 2000, Johnson *et al.* 2000a, Higgins *et al.* 1996, Young *et al.* 2001a) indicate nearly all fatalities are found in this area, with a large majority of carcasses found within 40 meters (m) of the turbine. Transects will be set approximately 10 m apart in the area to be searched under most conditions. If planted crops become tall enough to impact detection ability, transect widths will be reduced accordingly. A searcher will walk at a rate of approximately 45-60 m per minute along each

transect searching both sides out to 5 m for casualties. Search area and speed may be adjusted by habitat type after evaluation of the first searcher efficiency trial. It should take approximately 120 minutes to search each turbine plot depending on the visibility and transect width. For example, plots in wheat fields ready for harvest will take longer to search than fields that are fallow or plowed.

The condition of each carcass found will be recorded using the following condition categories:

- Intact a carcass that is completely intact, is not badly decomposed, and shows no sign
 of being fed upon by a predator or scavenger.
- Scavenged an entire carcass, which shows signs of being fed upon by a predator or scavenger, or a portion(s) of a carcass in one location (e.g., wings, skeletal remains, legs, pieces of skin, etc.).
- Feather Spot 10 or more feathers or 2 or more primaries at one location indicating predation or scavenging.

Appendix B contains examples of various field and laboratory forms for the carcass searches and fatalities discovered. All carcasses found will be labeled with a unique number, bagged and frozen for future reference and possible necropsy. A copy of the data sheet for each carcass will be maintained, bagged and frozen with the carcass at all times. For all casualties found, data recorded will include species, sex and age when possible, date and time collected, GPS location, condition (e.g., intact, scavenged, feather spot), and any comments that may indicate cause of death. All casualties located will be photographed as found and mapped on a detailed map of the study area showing the location of the wind turbines and associated facilities such as overhead power lines and met towers.

Casualties or fatalities found outside the formal search area by carcass search technicians but within 150 m of a wind turbine, meteorological tower, substation or project overhead powerline will be treated following the above protocol as closely as possible. Casualties or fatalities found by maintenance personnel and others not conducting the formal searches within 150 m of a wind turbine, meteorological tower, substation or project overhead powerline will be documented using a wildlife incident reporting system (see below). Any carcass found within the standardized carcass search areas (i.e., within 135 m of turbines that are to be searched), but not during a scheduled search, will be collected or marked when first documented to avoid double counting. Collection of state or federal endangered, threatened, or protected species will be coordinated with the USFWS and ODFW. When non-study personnel discover carcasses or injured animals, a digital photograph will be taken, the Project Wildlife Coordinator will be notified and will identify the casualty, or a Project biologist will be contacted to identify the casualty. Personnel potentially involved in searches will receive training prior to working in the Project. Casualties or fatalities found in non-search areas will be treated as incidental discoveries.

Any injured native birds found will be carefully captured by a trained Project biologist and transported to Blue Mountain Wildlife Rehabilitation Center or a nearby veterinary clinic in a timely fashion, after notifying appropriate agency personnel. The example protocol for handling

injured birds provided in Appendix C will be used for this project. With WEST's assistance, Chopin Wind, LLC will obtain the appropriate collection permits from ODFW and USFWS.

Schedule

Carcass searches will be conducted at the sampled turbines and all permanent met towers once every month. Surveys will be conducted for one year which will begin when Project operation commences. Following the study, the Technical Oversight Committee (TOC; see below) will convene to discuss monitoring results and the need for additional study.

The first search will be conducted approximately one month after the date all turbines become operational (commercially producing electricity). A hypothetical schedule for a search plot is illustrated below assuming all turbines become operational in November 2016 (Table 1).

Table 1. Search schedule assuming turbines become operational in November 2016.

Date	Search #
12/1/2016	1
1/1/2017	2
2/1/2017	3
3/1/2017	4
4/6/2017	5
5/4/2017	6
6/8/2017	7
7/6/2017	8
8/3/2017	9
9/7/2017	10
10/5/2017	11
11/1/2017	12

Searcher Efficiency Trials

Searcher efficiency studies will be conducted in the same areas carcass searches occur. Trials will be conducted by season within the major habitat type (cultivated agriculture). Searcher efficiency will be estimated by size of carcass and season. Estimates of searcher efficiency will be used to adjust the number of carcasses found, correcting for detection bias.

Searcher efficiency trials will begin when turbines are placed into operation. Personnel conducting the searches will not know when trials are conducted or the location of the detection carcasses. During each season, approximately 8 carcasses of birds of two different size classes¹ will be placed in the search area during each of the four seasons, for a total of approximately 64 searcher efficiency trial carcasses for the entire year. A minimum of two dates will be used each season for a minimum total of 8 trial dates. An attempt will be made to use several small brown birds (house sparrows) during the summer and fall seasons to simulate bat carcasses if bat carcasses are not available. Legally obtained bat carcasses will be used if available.

¹ Carcass that will be used for searcher efficiency trials will consist of non-native or commercially available species: house sparrows, rock doves, and hen mallards or hen pheasants.

All carcasses will be placed at random locations within areas being searched prior to the carcass search on the same day. If avian scavengers appear attracted by placement of carcasses, the carcasses will be distributed before dawn. Carcasses will be placed in a variety of postures to simulate a range of conditions.

Each trial carcass will be discreetly marked so that it can be identified as a study carcass after it is found. The number and location of the detection carcasses found during the carcass search will be recorded. The number of carcasses available for detection during each trial will be determined immediately after the trial by the person responsible for distributing the carcasses.

Carcass Removal Trials

The objective of carcass removal trials will be to determine the average length of time a carcass remains in the search plot and is available for detection by searchers, and the trial results will be used to adjust bird and bat fatality estimates for removal bias resulting from scavengers or agricultural activities. Carcass removal trials will be conducted throughout the year to incorporate seasonal variability in weather, vegetation, and scavenger densities. During each season within the major habitat type (cultivated agriculture), approximately 8 carcasses of birds of two different size classes will be placed in the search during each of the four seasons, for a total of approximately 64 removal trial carcasses for the entire year. Trials will not be conducted at search turbines to minimize the potential for confusing a trial bird with a turbine casualty.

Two size classes of trial carcasses (small and large) will be randomly placed in an area that is similar in size to the carcass search plots. Carcasses generally include the same species used for the searcher efficiency trials, including bats if available. Field technicians will monitor the trial carcasses over a 40-day trial period, checking them every day for the first four days and then on days seven, 10, 14, 20, 30, and 40. Removal trial carcasses will be discreetly marked with electrical tape to distinguish from non-trial carcasses. The day on which the carcass is no longer present will be recorded, and any carcasses or evidence (e.g., feathers) remaining at day 40 will be removed.

Wildlife Incident Response and Handling System

The Wildlife Incident Response and Handling System (WIRHS) is a monitoring program for reporting and handling avian and bat casualties or injured wildlife found by construction, operations, and maintenance personnel. Project personnel commonly on site will be trained in the methods. This monitoring program includes reporting of carcasses discovered incidental to construction, operation, and maintenance activities. This system will be in place for the life of the Project.

Any carcasses discovered by maintenance personnel will be recorded, photographed, and reported to the designated Project Wildlife Coordinator. The Wildlife Coordinator will be a Project point of contact responsible for identifying the fatality or contacting a Project biologist to have the fatality identified. The fatality will be collected or marked unless it is a protected species or unless given other direction from ODFW or USFWS. If injured birds are discovered by maintenance personnel, the procedure in Appendix C will be followed.

Analysis

Quality assurance and quality control (QA/QC) measures will be implemented at all stages of the study, including field studies, data entry, data analysis, and report writing. All field data sheets will be inspected for completeness, accuracy, and legibility. A sample of records from the electronic database will be compared to the raw data forms and any errors detected will be corrected. Irregular codes or data suspected as questionable will be discussed with the observer and/or project manager. Errors, omissions, or problems will be traced back to the raw data forms and rectified. All data sheets and electronic data files will be retained for reference.

Annual fatality estimates will be calculated for all birds, all bats, small birds, large birds, raptors, nocturnal avian migrants, raptor species of special concern, target grassland birds, and state sensitive avian species. Fatality estimates will be based upon the number of carcasses found during standardized searches as adjusted for searcher efficiency bias (proportion of trial carcasses not found by searchers) and carcass removal bias (probability that a carcass remained in the study plot and was available for detection by the searchers over the 40-day trial period). The following define the statistical methods utilized to develop adjusted annual fatality estimates.

Definition of Variables

The following variables will be used in the equations below:

- c_i the number of carcasses detected at plot *i* during the study period for which the cause of death was either unknown or was attributed to the facility
- n the number of search plots
- k the number of turbines searched
- \overline{c} the average number of carcasses observed per turbine per monitoring year
- s the number of carcasses used in removal trials
- s_c the number of carcasses in removal trials that remained in the study area after 40 days
- se standard error (square of the sample variance of the mean)
- t_i the time (in days) a carcass remained in the study area before it is removed, as determined by the removal trials
- \bar{t} the average time (in days) a carcass remained in the study area before it is removed, as determined by the removal trials
- d the total number of carcasses placed in searcher efficiency trials
- *p* the estimated proportion of detectable carcasses found by searchers, as determined by the searcher efficiency trials
- the average interval between standardized carcass searches, in days
- $\hat{\pi}$ the estimated probability that a carcass was available to be found during a search and was found, as determined by the carcass removal and searcher efficiency trials
- m the estimated annual average number of fatalities per turbine per year, adjusted for removal and searcher efficiency bias

Observed Number of Carcasses

The estimated average number of carcasses (\bar{c}) observed per turbine per monitoring year is:

$$\overline{c} = \frac{\sum_{i=1}^{n} c_i}{k} \tag{1}$$

Estimation of Carcass Non-Removal Rates

Estimates of carcass non-removal rates will be used to adjust carcass counts for removal bias. Mean carcass removal time (\bar{t}) is the average length of time a carcass remained in the study area before it was removed:

$$\bar{t} = \frac{\sum_{i=1}^{s} t_i}{s - s_c} \tag{2}$$

Estimation of Searcher Efficiency Trials

Searcher efficiency rates are expressed as p, the proportion of trial carcasses that were detected by searchers in the searcher efficiency trials, estimated by carcass size and season.

Estimation of Facility-Related Fatality Rates

The estimated per turbine annual fatality rate (m) will be calculated by:

$$m = \frac{\overline{c}}{\pi}$$
(3)

where $\hat{\pi}$ includes adjustments for both carcass removal (from scavenging and other means) and searcher efficiency bias. Data for carcass removal and searcher efficiency bias will be pooled across the study to estimate $\hat{\pi}$. $\hat{\pi}$ was calculated as follows:

$$\hat{\pi} = \frac{\overline{t} \cdot p}{I} \cdot \left[\frac{\exp\left(\frac{I}{t}\right) - 1}{\exp\left(\frac{I}{t}\right) - 1 + p} \right]$$
(4)

This formula (4) has been independently verified by Shoenfeld (2004). Separate estimates will be obtained for migration seasons and other seasons, and final estimates will be summed across seasons. The final reported estimates of m and associated standard errors and 90% confidence intervals will be calculated using bootstrapping (Manly 1997). Bootstrapping is a computer simulation technique that is useful for calculating point estimates, variances, and confidence intervals for complicated test statistics.

For each bootstrap sample, \bar{c} , \bar{t} , p, $\hat{\pi}$, and m will be calculated. The reported estimates are calculated as point estimates from the single real data set. The lower 5th and upper 95th percentiles of the 1,000 bootstrap estimates are estimates of the lower limit and upper limit of 90% confidence intervals.

Raptor Nest Survey

The primary objectives of raptor nest surveys are: 1) to estimate the size of the local breeding populations of tree-nesting raptor species within two miles of the turbine locations, and 2) to collect data to assist in determination of potential operational effects on the nesting activity or nesting success in the local populations of target raptor species: Swainson's hawk, red-tailed hawk, and great-horned owl and other tree nesting raptor species (e.g., ferruginous hawks) that may be found in the area. No golden eagle nests were documented within 10 miles of the Project during baseline survey efforts (Enk et al. 2011, Enk 2011).

Prior to construction, ground surveys will be used to gather nest success statistics on active nests, nests with young, and number of young fledged. Chopin Wind, LLC will share the data with state and federal biologists. Raptor nests will be monitored prior to construction and for one year post-construction. Monitoring will consist of intensive ground surveys in April and May during all years. Nests documented during previous survey efforts that occur within two miles of the current layout will be checked for occupancy (Figure 4). Searches for new nest locations will also occur. All nests will be given identification numbers, and nest locations will be recorded on topographic maps. Global positioning system (GPS) coordinates will be recorded for any new nests not previously recorded. Locations of inactive nests will be recorded as they may become occupied during future years. Nest occupancy will be determined. For occupied nests of the target raptor species (listed above) within two miles of the Project, nesting success will be determined by a minimum of one ground visit (if land access is granted) to verify species, number of young, and nesting success. A successful nest means that the young have successfully fledged (flown from the nest).

TECHNICAL OVERSIGHT COMMITTEE

Chopin Wind will establish a Technical Oversight Committee as a recommending body for the Project; its role was to review protocols and make recommendations to the Umatilla County Planning Commission based on the data collected during the course of the monitoring study. Once Chopin Wind attains a current CUP, WEST and Chopin Wind will assemble the committee; an introductory meeting to present this Project Plan will be arranged at a future date. In accordance with Section 152.616 (HHH)(2)(D) of the Umatilla County Development Code, the TOC will consist of the following:

- Shroeder or Ferguson, a primary landowner/leasee;
- Kate Valentine, a facility owner/operator representative (chair);
- a representative from Oregon Department of Fish and Wildlife;
- two Umatilla County residents with no direct economic interest in the Project (appointed by the Umatilla County Board of Commissioners);
- a representative from US Fish and Wildlife Service; and
- a member of the Umatilla County Planning Commission.

REPORTING

This monitoring program will provide data for evaluating the impacts of the Project on birds and bats through fatality estimates. In addition, information on the occupancy and breeding success of raptors (those identified during 2010 helicopter surveys and other identified nests) within the vicinity of the turbines will be gathered. The USFWS will be notified (email and phone) within 24 hours if any federally-listed species or eagles are discovered. An annual report will be prepared at the end of the first year of monitoring and will be discussed with the TOC to review and provide recommendations.

Judgments regarding the level of mortality warranting further study must be subjective. The criteria for recommending further study should use a common sense "weight-of-evidence" approach to determine the effects of the Project on species of concern. The weight-of-evidence approach will consider the number of carcasses actually found, the magnitude of mortality events, the estimate of the total number of carcasses, the precision of the estimates, the relative abundance of the species based on the baseline and monitoring studies, and results of similar studies in the region.

LITERATURE CITED

- Enk, T. 2011. Golden Eagle Nest Survey Report for the Chopin Wind Resource Area, Umatilla County, Oregon. Technical Report prepared for WKN Chopin LLC. Western EcoSystems Technology, Inc. Cheyenne, Wyoming, and Walla Walla, Washington.
- Enk, T., K. Bay, and D. Solick. 2011. Wildlife Baseline Studies for the Chopin Wind Resource Area, Umatilla County, Oregon, 2010-2011 Final Report. Technical Report prepared for WKN Chopin LLC. Western EcoSystems Technology, Inc. Cheyenne, Wyoming, and Walla Walla, Washington.
- US Fish and Wildlife Service (USFWS). 2012. Final Land-Based Wind Energy Guidelines. March 23, 2012. 82 pp. Available online at: http://www.fws.gov/windenergy/docs/WEG_final.pdf

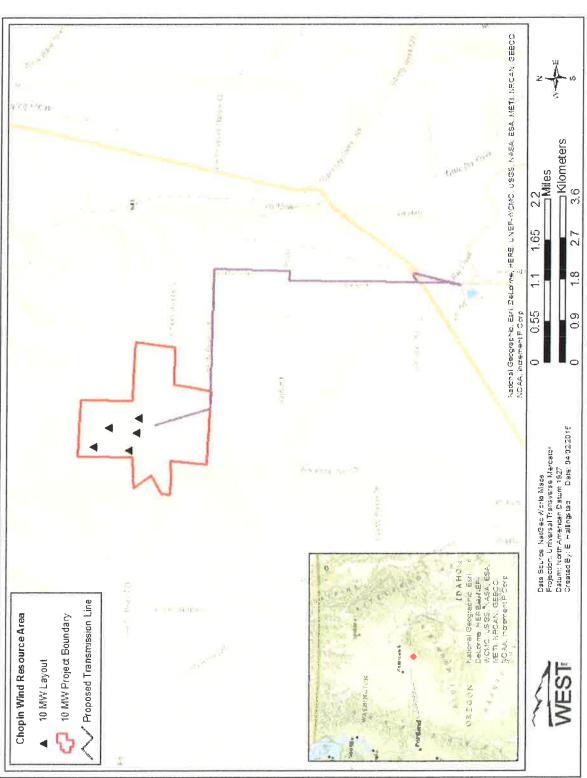


Figure 1. Overview of the currently proposed Chopin Wind Energy Facility.

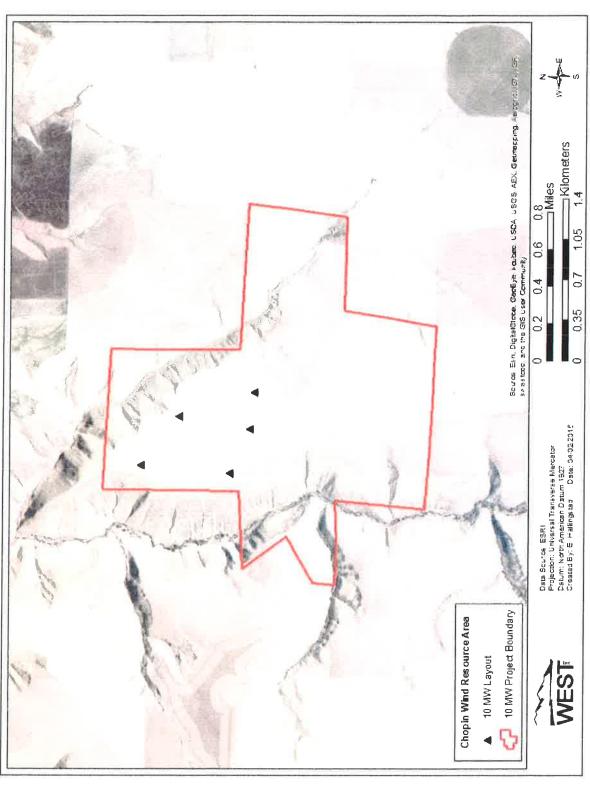


Figure 2. Aerial image of the Chopin Wind Energy Facility.

April 2015

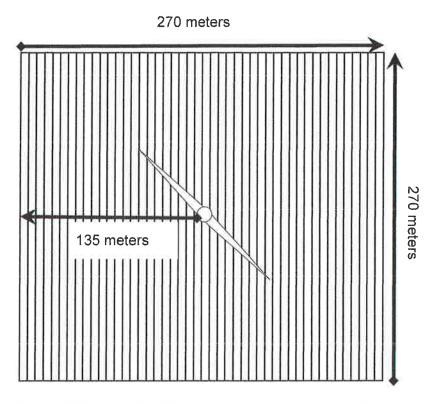


Figure 3. Schematic of turbine search plot dimensions and transects.

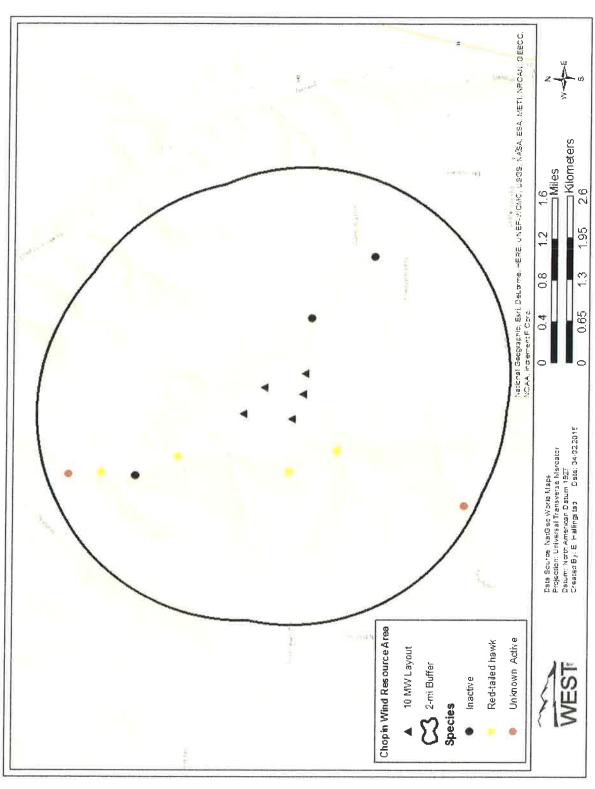


Figure 4. 2010 raptor nest survey results within two miles of currently proposed Chopin Wind Energy Facility turbines.

APPENDIX A RESUMES OF KEY PERSONNEL



EDUCATION

M.S. Boise State University Boise, Idaho 2008 Raptor Biology

B.S.
University of Wisconsin-Eau
Cl
Eau Claire, Wisconsin

1998 Biology, minor: Chemistry

SCIENTIFIC ORGANIZATION MEMBERSHIPS

Raptor Research Foundation

Eric Hallingstad, Wildlife Biologist

PROFESSIONAL EXPERIENCE

2010-present *Project Manager,* WEST, Inc. 2008-2009 *Field Technician,* WEST, Inc.

2008-2009 *Technical Writer*, United States Forest Service

2004-2008 Hawk Trapper, Idaho Bird Observatory

2007 Avian Research Consultant, Tetra Tech Environmental Consulting, Inc.

2007 Seasonal Wildlife Biologist, Idaho Fish and Game

2007 Wildlife Research Consultant, United States Forest Service
 2006 Shrubsteppe Avian Technician, Idaho Bird Observatory

2005 Goshawk Surveyor, United States Forest Service

2004 Avian Biologist, Sage Science Consulting

FIELD EXPERIENCE

Project Management: Responsible for completion and reporting of all necessary vegetation and wildlife survey efforts in support of several wind projects throughout the Pacific Northwest. Coordinated survey design and implementation with the state and federal resource agencies and clients to ensure that surveys are conducted in accordance with appropriate protocols and are completed in a timely and cost-efficient manner. Clients include EDPR, EDF Renewables, and Iberdrola.

Field Supervisor: Supervisory experience with baseline wildlife and natural resource studies, including Site Characterization Studies, threatened and endangered species surveys, and pre-construction avian and bat studies. Has led many field crews on a variety of studies under a wide array of circumstances.

Raptor Studies: Graduated from the Raptor Biology program at Boise State University with a thesis focused on the seasonal variation of physiological parameters in the American kestrel. Contributed to eight raptor ecology studies including hawk migration, spotted owl demography, and harpy eagle reintroduction efforts. Assisted with capture and GPS instrumentation of both bald and golden eagles. Conducted aerial and ground-based eagle and other raptor nest surveys for multiple wind and pipeline projects. Experienced with leghold, net launcher, bow net, mist-net, dho-ghaza, bal-chatri, hand-grab, and noose pole capture techniques.

Wildlife Studies: Worked as a field biologist on 12 different non-raptor wildlife studies throughout the western US. Extensive experience in avian research, as well as threatened and endangered wildlife issues. Study species include Canada lynx, gray wolf, pileated woodpecker, Columbia spotted frog, willow flycatcher, greater sage-grouse, and other sensitive sagesteppe obligates.

ADDITIONAL TRAINING AND CERTIFICATION

Raptor Bander North American Banding Council
Advanced Bat Capture Bat Conservation International



Joel L. Thompson, Wildlife Biologist/Project Manager

PROFESSIONAL EXPERIENCE

2008-Present	Wildlife Biologist/Project Manager, Western EcoSystems Technology, Inc., Cheyenne,
	Wyoming
2008	Field Biologist, Western EcoSystems Technology, Cheyenne, Wyoming
2008	Consulting Wildlife Biologist, Green Diamond Resource Co., Korbel, California
2007-2008	Hunting Guide/Ranch Hand, Ringneck Ranch Inc., Tipton, Kansas
1998-2006	Wildlife Survey Coordinator, Green Diamond Resource Co., Korbel, California
1997	Wildlife Assistant, Arizona Game and Fish Department, Phoenix, Arizona
1993-1997	Wildlife Field Specialist, Simpson Timber Co., Korbel, California
1991-1992	Research Assistant, HSU Foundation, Humboldt State University, Arcata, California

EDUCATION

M.S. Humboldt State University Arcata, California

Natural Resources: Wildlife

B.S. Humboldt State University Arcata, California Wildlife Management

SCIENTIFIC ORGANIZATION

N BERSHIPS

The Wildlife Society

The Western Section of The Wildlife Society

Central Mountains and Plains States Section of The Wildlife Society

The Southwest Section of The Wildlife Society

SPECIALTY AREAS

Wildlife Research: Experience with various aspects of wildlife research, including project planning, data collection and management, supervision of field staff, and report/manuscript preparation. Extensive work with special status species in managed forest landscapes.

Wind and Solar Power Projects: Experience conducting pre-construction baseline and post-construction monitoring studies for wind and solar power projects in New Mexico, Arizona, California, and Kansas, including design and implementation of survey protocols, agency correspondence, and development of final reports.

Threatened, Endangered, and Sensitive Species: Extensive work experience with with spotted owls (northern and Mexican subspecies), fisher, and tree voles. Experience conducting species-specific surveys for southwestern willow flycatcher, peregrine falcon, bald eagle, golden eagle, burrowing owl, greater sage grouse, and lesser prairie chicken as well as general surveys for forest raptors, aquatic and terrestrial amphibians, and small mammals.

Field Related: Map and compass, orienteering, air photo interpretation, vegetation sampling, GPS, ATV and 4x4 vehicle use, boating on inland and ocean waters (inboard/outboard/jet), remote camera sampling, radio telemetry, aerial surveys (fixed-wing and helicopter), mist nesting, raptor banding, and snorkel surveys.

ADDITIONAL TRAINING AND CERTIFICATION

Animal Restraint and Handling ATV certification, Chainsaw use, Hunters Safety Certificate Wyoming Pocket Gopher Training Desert Tortoise Handling Workshop

SELECTED PUBLICATIONS AND PRESENTATIONS

Thompson et al., IN PREP, Journal of Wildlife Management. Density of Fisher on Managed Timberlands in North Coastal California

Thompson et al., April 2002, *Northwestern Naturalist*. Relative abundance, nest site characteristics and nest dynamics of Sonoma tree voles in managed forests of north coastal California.

October 2010; Assessing Golden Eagle Use of Wind Resource Areas Using Observational Data. Poster presentation at the NWCC National Wildlife Research Meeting VIII, Lakewood, CO.

June 2010: Wildlife and Wild Lands Issues Associated with Wind Energy Development in Arizona.

Invited speaker at Permitting Wind Development - What Counties Need to Know workshop,
Northern Arizona University, Flagstaff, AZ.

Spring 2008. Humboldt State University M.Sc. Thesis: Abundance and density of fisher on managed timberlands in north coastal California.

Feb 2006: *Martes* symposium, Fisher and Marten in California – Invited Poster – Density of fisher on managed timberlands in north coastal California.

March 2004: Redwood Region Symposium - Oral Presentation – Summary of Pacific Fisher studies on Green Diamond Resource Co. Lands.



EDUCATION

Continued Education
Blue Mountain Community
College
Pendleton, Oregon
1987-1988
Studies in Botany,
Ornithology, Zoology, and
General Biology

B.S. Oregon State University Corvallis, Oregon 1982

B' sss: Minor in Forestry

SCIENTIFIC ORGANIZATION MEMBERSHIPS

The Native Plant Society of Oregon

The Audubon Society

Trout Unlimited

Blue Mountain Wildlife

Jerry E. Baker, Wildlife Biologist

PROFESSIONAL EXPERIENCE

2006-Present	Wildlife Biologist, Western EcoSystems Technology, Inc., Walla Walla, Washington
2001-2006	Wildlife Biologist, Northwest Wildlife Consultants, Pendleton, Oregon
1980-2007	Professional Photographer, Jerry Baker Photography, Athena, Oregon
1992-2000	Partner/Owner, Bar M Dude Ranch, Adams, Oregon
1975-1992	Public Relations/Personnel Manager, Bar M Dude Ranch, Adams, Oregon

WILDLIFE, THREATENED AND ENDANGERED SPECIES SURVEYS

Washington ground squirrel surveys for the Stateline Wind Project and Leaning Juniper Wind Project, Oregon

Bull trout surveys on the Umatilla River, ODFW protocol, Oregon

Rare plant surveys for the White Creek Wind project, Washington

Avian surveys for 25 different Wind Projects, Oregon, Washington and Nevada

Conducted and supervised surveys for sensitive species for the Pebble Springs Wind Project, Oregon

Winter big game surveys for the Elkhorn Wind Project, Oregon

Ferruginous and Swainson's Hawk nest monitoring for the Stateline Wind Project, Oregon

SELECTED PROFESSIONAL PUBLICATIONS

Erickson, W., J. Baker 2008 Site characterization study for the East Klickitat Wind Project. Final report to Horizon Wind.

Kronner, K, R. Gritski, J. Baker, 2005. Wildlife baseline study for the Leaning Juniper Wind Project, Oregon. Summary of results from 2004-2005 wildlife surveys. Final report to PPM Energy.

Kronner, K., R. Gritski, J. Baker, 2005. Baseline avian studies for the Bighorn Wind Project, Washington. Summary of results from 2004-2005 wildlife surveys, Klickitat County, Washington. Final Report to PPM Energy.

Kronner, K., J. Baker, 2006. Habitat description for a proposed transmission line, White Creek Wind Project, Klickitat County, Washington. Final Report to Klickitat County PUD, Washington.

SPECIAL TRAINING AND COURSES

Basic Wetland Delineation, Portland, Oregon, 2002
Bat Identification and Monitoring, Springfield, Oregon, 2001
Forest Bird Identification, hosted by USFS, Bar M Ranch, Oregon, 1998

APPENDIX B

CARCASS SEARCH AND SEARCHER EFFICIENCY TRIAL DATA FORMS

CASUALTY SEARCH FORM-keep with carcass

Chopin Wind Energy Facility

DATE:	OBSERVER(s):		TURBINE NO	.:
TIME BEGIN	I: TIME END:	(observer #2)	TIME BEGIN:	TIME
END:				
CASUALTIE	S FOUND:			
Species	Casualty ID	(e.g. 010109-BARS-1-	1) Dominant Veg Cover	Visibility
Index				
SEARCHER	EFFICIENCY CARCASSES FOUND:			
Species	Distance (m)/Bearing from turb	ld Tag	Dominant Veg Cover	Visibility
Index				
	I			
		-		
	1			
-		·	· · · · · · · · · · · · · · · · · · ·	

CASUALTY INFORMATION FORM - FIELD FORM Chopin Wind Energy Facility DATE:____TIME:___OBSERVER:____ FOUND DURING (check one): SCHEDULED CARCASS SEARCH____INCIDENTAL FIND ____ COLLECTED? Yes No SAMPLE NO.: _____ FILM ROLL/PHOTO NO: _____ PLOT TYPE (circle one): turbine met tower powerline other PLOT NO. LOCATION IF NOT ON PLOT _____ SPECIES: _____ SEX(circle): M F U AGE(circle): A J U CONDITION (circle one): injured intact scavenged dismembered feather spot other DISTANCE & BEARING FROM NEAREST TOWER/POLE: DESCRIPTION DISTANCE (m) BEARING (degrees) Part 2 Part 3 Other ______ Comments: ESTIMATED TIME SINCE DEATH/INJURY: WEATHER HISTORY [If carcass is estimated to be less than one week old, circle any of the following weather conditions that occurred at or before the estimated time of death/incident]: clear calm fog cloudy rain snow storm austy wind violent storm WEATHER NOTES: GENERAL COMMENTS (e.g. behavior observed if bird is injured; details of carcass - body parts missing, injuries, number of feathers in feather spot; indications of cause of death, field marks for identification, USFWS band no., etc.): **Agency Contact** USFWS Contact: Date:______ Time:_____ Recovery Approval: yes no Contact Person(s): Comments: Disposition of Find Date: _____ Time: _____ Date: ____ Time: Transported to freezer _____ Release to USFWS: Person:

Searcher Efficiency Trials: Carcass Placement Log

Chopin Wind Energy Facility

	N di																				
	Ċ																	Precip	Precip	Precip	Precip
	Retrieved? (ves/no)																jq:	pee	eed	pee	eed
	Found? (yes/no)																ses are place	Wind Sp	Wind Speed	Wind Sp	Wind Speed_
Other	Plot: Location																Weather notes for days that carcasses are placed:	Wind Dir.	Wind Dir.	Wind Dir.	Wind Dir.
Month	Time																eather notes	Temp	Temp	Temp	Temp
	Date																×	1	٢	<u></u>	Ψ Ψ
Season	Placed By																	Time	Time	_ Time	Time
General Information: Season	Species/Age																	Date	Date	Date	Date
Ger	Š.	_	2	က	4	2	ω	7	ω	တ	9	=	12	13	14	15					

General Information: Season

Other

Trial Period (e.g., 1 or 2)

	Possible	scavenge										
Condition ⁶ of Carrass op Day Cherked	Day											
UTM datum (1983)												CHECKED BY:
	Dons Veg Visibility Turbine Turbine Bearing from Cover Index # m Turbine N	-										3
	Dist from Turbine											
laced	Turbine #											
Information Regarding Carcass When Placed	Visibility											
ng Carcas	Dom Veg Cover											
Regardii	Age-/	-			-							
formation	Species											
u	Ĕ											
	Date											
	Placed											
	Carcass Placed		2	60	या	ഥ	c	~	90	on on	02	

Species = 4 letter code (e.g., MALL = mallard; BARS = barn swallow).

Age. A =adult, J = juvenile; C = chick.
Size SB=Smail Bird, LB=Large Bird, BAT.
Size SB=Smail Bird, LB=Large Bird, BAT.
Dominant Veg. B = bare ground/gravel (e.g., dirt road or gravel pad); R = large rocks/boulders; GR = grassland; CRP=CRP; FR = forest/woodlot; CR = crop (e.g., com. soybean, wheat); OT = other.
Usibility Index: E = Easy (e.g., 290% bare ground, vegetation <6 tall); M = Moderate (e.g., 26-89% bare ground; vegetation or rock/scrub);
rock/scrub); VD = Very difficult (e.g., ≤25% bare ground; >25% bare ground cover is ≥12" tall vegetation or rock/scrub).

Condition. I = infact, no evidence of scavenging, S = evidence of scavenging. S = evid

APPENDIX C

INJURED WILDLIFE - PROCEDURES FOR REPORTING AND CARE

INJURED WILDLIFE - PROCEDURES FOR REPORTING AND CARE

The following procedures apply to injured birds or other wildlife:

RECORD DATA ON CASUALTY INFORMATION FORM but first, the primary objective is to provide immediate care for the injured animal. Capture the animal by covering it with a dark cloth or blanket. This will calm down the animal so it can be more easily handled. Place the animal in a box that has a towel or other material for the animal to hide under or grasp on to.

Quickly look the immediate area over for other injured animals as there may have been a flock, or a pair.

While capturing the animal, assess the injury so you'll know what to report to the Project Wildlife Coordinator or Project biologist, as well as the wildlife rehabilitator or veterinarian.

Do not provide additional stress. Keep the animal cool if it is a hot day, or keep it slightly warm if it is a cool day by placing the box in an office. Darken room if possible.

If it is a federally-listed or Oregon State Sensitive species, the Project Wildlife Coordinator or a Project biologist shall phone the Chopin Wind, LLC Representative (if other than the Project Wildlife Coordinator). They will contact Mark Kirsch, Oregon Department of Fish and Wildlife, at 541-276-2344, and Marisa Meyer, USFWS at 541-962-8593. If the injured animal is found after normal weekday office hours, report it the next available working day.

If you can't reach the Project Wildlife Coordinator or Project biologist, phone Blue Mountain Wildlife directly (Lynn Tompkins, 541.278.0215). They will instruct you further. The rehabilitation center is required to report any injured raptor within 24 hours ODFW and USFWS. If it is an eagle, it is reported to Oregon State Police (in addition, all birds that may have been gunshot are reported to them). Describe the injury to the rehabilitation center and they will determine if it should go directly to a veterinary clinic.

Deliver the animal to the specified location. The doctor will need to fill out the "Casualty Examination Form." The clinic will make arrangements to deliver the animal to the designated rehabilitation center. The Project operator or owner(s) will pay for all veterinary bills.